


Specification Sheet

Part Number: 596-00326

Made with UV stable inks and materials for durability and weather resistance

The labels are supplied with aggressive adhesive to ensure long life

Solar Installation labels meet NEC & IFC standards for printed text, character height, color and outdoor UV stability to pass inspections

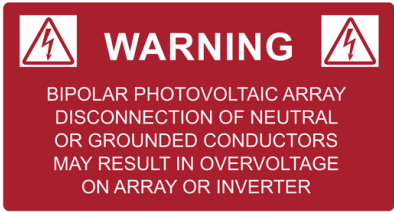

Solar Label, BIPOLAR SOLAR ARRAY, 3.75" x 2.0", VL, Red, 50/pkg

Article Number	596-00326
Type	BIPOLARPV
Color	Red (RD)
Quantity Per	pack
Product Description	Many times common solar label designs are specified even though they might not be required by code. HellermannTyton offers a selection of some of the most commonly requested labels for use on solar installations.
Short Description	Solar Label, BIPOLAR SOLAR ARRAY, 3.75" x 2.0", VL, Red, 50/pkg
Global Part Name	BIPOLARPV-V-RD

Width W (Imperial)	3.75
Width W (Metric)	92.25
Height H (Imperial)	2.0
Height H (Metric)	50.8
Material	Vinyl (V)
Material Shortcut	V
Adhesive	Acrylic
Halogen Free	Yes
UV Resistant (Yes/No)	No
Use Conditions	For Indoor and Outdoor Use
Adhesive Operating Temperature	-40°F to +174°F (-40°C to +79°C)
Operating Temperature	-40°F to +174°F (-40°C to +79°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Certification/Specification	IFC 2012 UL 969 NEC2011

Warranty (US) Yes

UL Recognized (US) Yes

Package Quantity (Imperial) 50

Package Quantity (Metric) 50

Customs Number 3919905060

Labels per Column 1

Labels per Row 1

7930 N. Faulkner Road, Milwaukee, WI 53224
Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2026 HellermannTyton. All Rights Reserved.
[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)