


GaNSafe™ Power IC






1. Features

- V_{DS} 650V continuous / 800V transient
- 25 mΩ $R_{DS(ON)}\text{_MAX_25C}$ and 90 A $I_{DS(\text{CONTINUOUS})}$
- TOLT-16L thermally-enhanced, top-cooled
- PWM input compatibility 10 to 18 V
- Paralleling capability up to 2x power ICs
- Zero reverse-recovery charge
- Turn-ON and Turn-OFF dV/dt programmability
- Up to 2 MHz operation
- Short Circuit Protection with 350 ns latency
- dV/dt immunity up to 100 V/ns
- 2kV ESD all Pins
- JEDEC and IPC-9701 Qualifications
- AEC-Q100 Grade 1 (ordering option)
- RoHS, Pb-free, REACH-compliant

2. Applications / Topologies

- AC-DC, DC-DC, CCM or CrM TP-PFC
- Optimized for synchronous half-bridge, full-bridge, 3-phase, or buck/boost operation
- Data Center CRPS, and Solar Inverter/ESS
- EV OBC & DC-DC converter, and motor drive

4. Typical Application Circuits

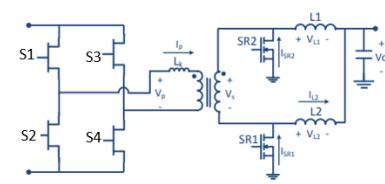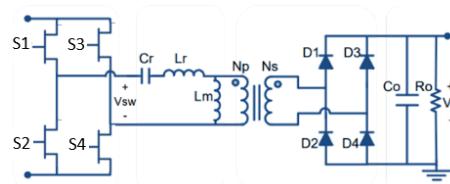

5. Table of Contents

1. Features	1
2. Applications / Topologies	1
3. Description	1
4. Typical Application Circuits	1
5. Table of Contents	2
6. Absolute Maximum Ratings^(Note 1)	3
7. Recommended Operating Conditions^(Note 4)	4
8. ESD Ratings	4
9. Thermal Resistance	4
10. Electrical Characteristics	5
11. Inductive Switching Test Circuit and Typical Waveforms	6
12. Electrical Curves (GaN FET, $T_{CASE} = 25^\circ\text{C}$ unless otherwise specified)	7
13. Pinout Table	10
14. Functional Description	11
14.1. GaNSafe Operation: Internally-regulated V_{GS} and Block Diagram	11
14.2. Internal Gate Drive Power Loss	12
14.3. Programmable Turn-ON and Turn-OFF dV/dt Control	12
14.4. Paralleling GaNSafe power IC's	12
14.5. Short Circuit Protection	13
14.6. Design for $V_{DS(\text{CONT})}$ and $V_{DS(\text{TRAN})}$	13
14.7. PCB Layout Guidelines and PCB Footprint	14
14.8. Reference Schematic	15
14.9. Recommended Isolator IC's	15
15. Package Outline Dimensions:	16
16. TnR Drawing and Socket Orientation	17
17. 20-Year Limited Product Warranty	18
18. Ordering Information	18
19. Revision History	18

6. Absolute Maximum Ratings^(Note 1)

Symbol	Parameter	Max	Units
$V_{DS(CONT)}$	Continuous Drain-to-Source voltage	-7 to +650	V
$V_{DS(TRAN)}$	Transient Drain-to-Source voltage ^(Note 2)	800	V
$I_{DS(CONT)}$	Continuous Drain current ($T_{CASE} = 25^\circ\text{C}$) ^(Note 3) Continuous Drain current ($T_{CASE} = 100^\circ\text{C}$, $T_{JUNC} = 150^\circ\text{C}$) ^(Note 3)	90 57	A
I_{DS_PULSE}	Pulsed Drain current (10 μs @ $T_{JUNC} = 25^\circ\text{C}$) ^(Note 3) Pulsed Drain current (10 μs @ $T_{JUNC} = 150^\circ\text{C}$) ^(Note 3)	175 80	A
V_{DRIVE_CONT}	Continuous input voltage measured between V_{DRIVE} and SK pins	-0.6 to 18	V
V_{DRIVE_TRANS}	Transient input voltage measured between V_{DRIVE} and SK pins (200ns) Transient input voltage measured between V_{DRIVE} and SK pins (200ns) Transient input voltage measured between V_{DRIVE} and SK pins (5ns)	20 -2 -10	V
dV/dt	Slew Rate on Drain-to-Source	100	V/ns
T_{JUNC}	Junction Temperature	-40 to +150	°C
T_{STOR}	Storage Temperature	-55 to +150	°C

(1) (with respect to Source, $T_{CASE} = 25^\circ\text{C}$, unless specified). Absolute Maximum Ratings are stress ratings, and subjecting devices to stresses beyond these ratings may cause permanent damage.

(2) $V_{DS(TRAN)}$ allows for surge ratings during **non-repetitive** events that are $< 100 \mu\text{s}$.

(3) Limited by Short Circuit Protection.

7. Recommended Operating Conditions (Note 4)

Symbol	Parameter	Min	Typ	Max	Units
$V_{\text{DRIVE_H}}$	Drive input pin voltage high	11	12 ~ 13	16	V
$V_{\text{DRIVE_L}}$	Drive input pin voltage low	-0.3	0	0.3	V
$R_{\text{DRIVE_ON}}$	Turn-ON V_{DRIVE} Pin series resistor	5	10	25	Ω
$R_{\text{DRIVE_OFF}}$	Turn-OFF V_{DRIVE} Pin series resistor	1	2	10	Ω

(4) Exposure to conditions beyond maximum recommended operating conditions for extended periods of time may affect device reliability.

8. ESD Ratings

Symbol	Parameter	Max	Units
HBM	Human Body Model (per JS-001-2014)	2,000	V
CDM	Charged Device Model (per JS-002-2014)	1,000	V

9. Thermal Resistance

Symbol	Parameter	Typ	Units
$R_{\text{e_JUNC-CASE}}$	Junction-to-Case Thermal Resistance	0.28	$^{\circ}\text{C/W}$

10. Electrical Characteristics

Conditions unless otherwise specified: $V_{DS} = 400V$, $V_{DRIVE} = 15V$, $T_{CASE} = 25^\circ C$, $I_{DS} = 29A$, $R_{DRIVE} = 5\Omega$

Symbol	Parameter	Min	Typ	Max	Units	Conditions
Drive Pin Characteristics						
$I_{DRIVE_OPERATING}$	V_{DRIVE} operating current		5.1		mA	$V_{DRIVE} = 15V$, $F_{SW} = 300kHz$, 50% D.C., $V_{DS} = 0V$
$I_{DRIVE_LEAKAGE}$	V_{DRIVE} leakage current		1.8		mA	$V_{DRIVE} = 15V$
Switching Characteristics						
t_{ON}	Turn-ON propagation delay	25		41	ns	$Fig\ 1,2$; $-40^\circ C \leq T_{CASE} \leq +150^\circ C$; $R_{DRIVE} = 1\Omega$
t_{OFF}	Turn-OFF propagation delay	10		19	ns	$Fig\ 1,2$; $-40^\circ C \leq T_{CASE} \leq +150^\circ C$; $R_{DRIVE} = 1\Omega$
t_{ON_MIN}	Minimum Drive on-time pulse duration	75			ns	$R_{DRIVE} = 5\Omega$
t_{RISE}	Turn-OFF rise time		8		ns	$Fig\ 1,2$; $R_{DRIVE} = 1\Omega$
t_{FALL}	Turn-ON fall time		11		ns	$Fig\ 1,2$; $R_{DRIVE} = 10\Omega$
Short Circuit Protection (SCP)						
V_{DS_SCP}	$V_{DS(ON)}$ Short Circuit Detect Threshold	11.5	13.5		V	$18V \geq V_{DRIVE} \geq 11V$, $T_{JUNC} = -40^\circ C$ to $+150^\circ C$, verified by design
$t_{SCP_DLY_TURN-ON}$	Delay from Short Circuit Event to Soft Shut Down, into Turn-ON		350		ns	$18V \geq V_{DRIVE} \geq 11V$, $T_{JUNC} = -40^\circ C$ to $+150^\circ C$, verified by design
$t_{SCP_DLY_OPER}$	Delay from Short Circuit Event to Soft Shut Down, during Operation		50		ns	$18V \geq V_{DRIVE} \geq 11V$, $T_{JUNC} = -40^\circ C$ to $+150^\circ C$, verified by design
GaN FET Characteristics						
I_{DSS}	Drain-Source leakage current		4.5	100	μA	$V_{DS} = 650\ V$, $V_{DRIVE} = 0\ V$
I_{DSS}	Drain-Source leakage current		45		μA	$V_{DS} = 650\ V$, $V_{DRIVE} = 0\ V$, $T_{JUNC} = 150^\circ C$
$R_{DS(ON)}$	Drain-Source resistance		18	25	$m\Omega$	$V_{DRIVE} = 15V$, $I_{DS} = 29\ A$
$R_{DS(ON)}$	Drain-Source resistance		43		$m\Omega$	$V_{DRIVE} = 15V$, $I_{DS} = 29\ A$, $T_{JUNC} = 150^\circ C$
V_{SD}	Source-Drain reverse voltage		3.3		V	$V_{DRIVE} = 0\ V$, $I_{SD} = 29\ A$
I_{SD}	Source-Drain reverse current		150		A	$V_{DRIVE} = 0V$, $V_{SD} = 7V$, 50us pulse, based on $P_{DISSIPATION}$
Q_{OSS}	Output charge		125		nC	$V_{DS} = 400\ V$, $V_{DRIVE} = 0\ V$
Q_{RR}	Reverse recovery charge		Zero		nC	
C_{OSS}	Output capacitance		143		pF	$V_{DS} = 400\ V$, $V_{DRIVE} = 0\ V$
$C_{O(er)}$ (Note 5)	Effective output capacitance, energy related		206		pF	$V_{DS} = 400\ V$, $V_{DRIVE} = 0\ V$
$C_{O(tr)}$ (Note 6)	Effective output capacitance, time related		314		pF	$V_{DS} = 400\ V$, $V_{DRIVE} = 0\ V$
E_{ON}	Switching energy, Turn-ON		145		μJ	$V_{DS} = 400\ V$, $I_{DS} = 29\ A$, $R_{DRIVE} = 5\Omega$
E_{OFF}	Switching energy, Turn-OFF		5		μJ	$V_{DS} = 0$ to $400\ V$, $I_{DS} = 29\ A$, $R_{DRIVE} = 1\Omega$

(5) $C_{O(er)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 400 V

(6) $C_{O(tr)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 400 V

11. Inductive Switching Test Circuit and Typical Waveforms

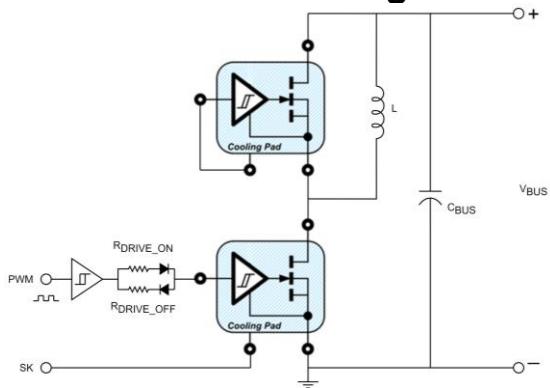


Figure 1. Inductive Switching Test Circuit

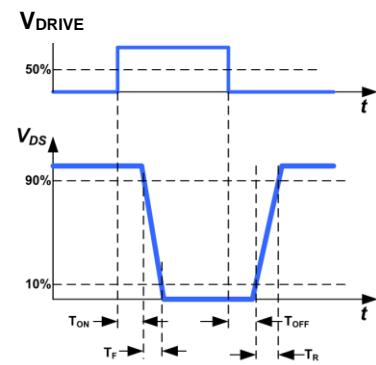


Figure 2. Prop Delay, Rise/Fall Time

12. Electrical Curves (GaN FET, $T_{CASE} = 25$ °C unless otherwise specified)

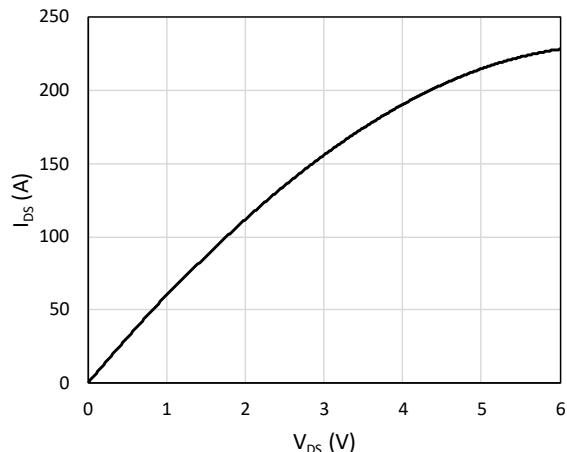


Fig. 3. I_{DS} vs. V_{DS} , $T_{JUNC} = 25$ °C

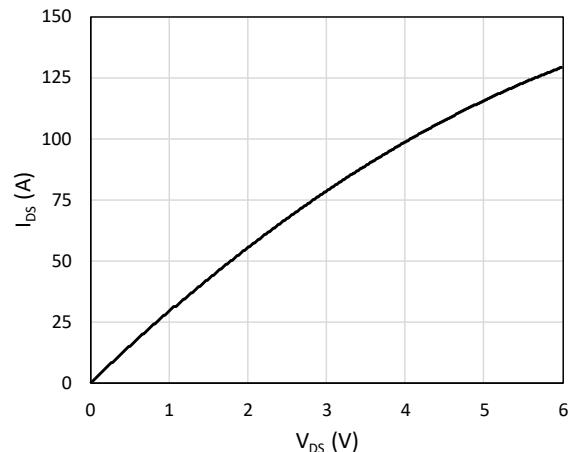


Fig. 4. I_{DS} vs. V_{DS} , $T_{JUNC} = 150$ °C

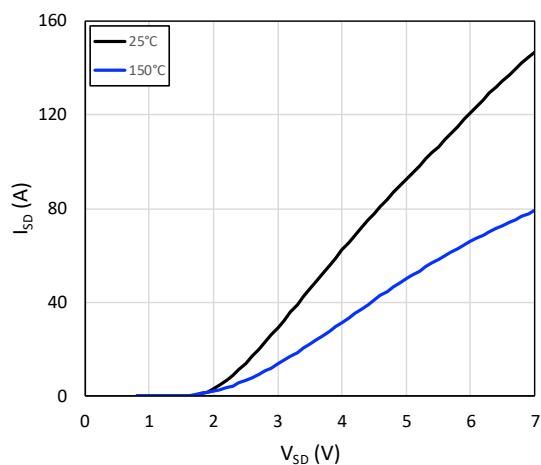


Fig. 5. I_{SD} vs. V_{SD} , $T_{JUNC} = 25$ °C, 150 °C

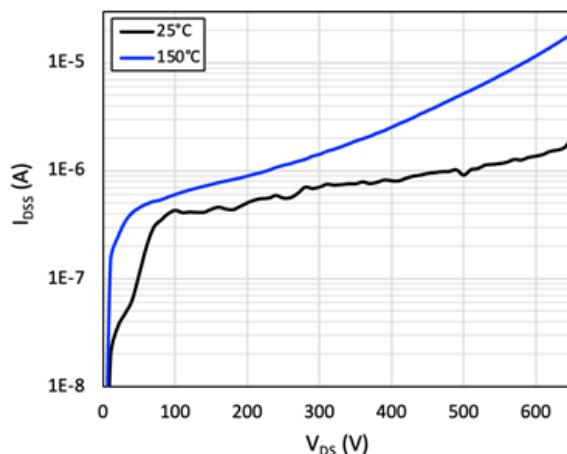


Fig. 6. I_{DSS} vs. V_{DS} , $T_{JUNC} = 25$ °C, 150 °C

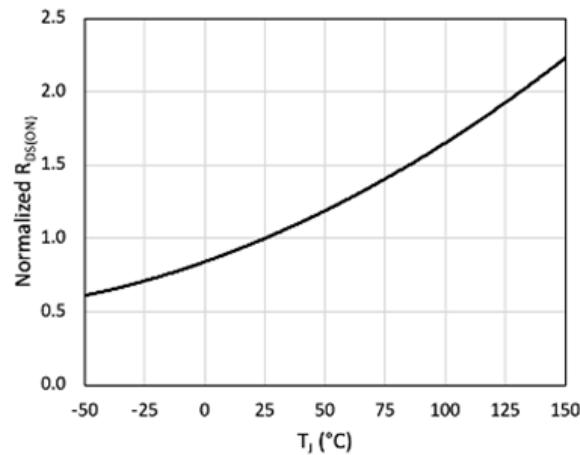


Fig. 7. Normalized $R_{DS(ON)}$ vs. T_{JUNC}

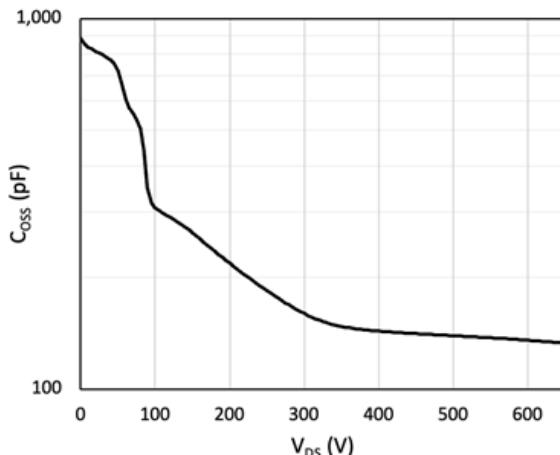
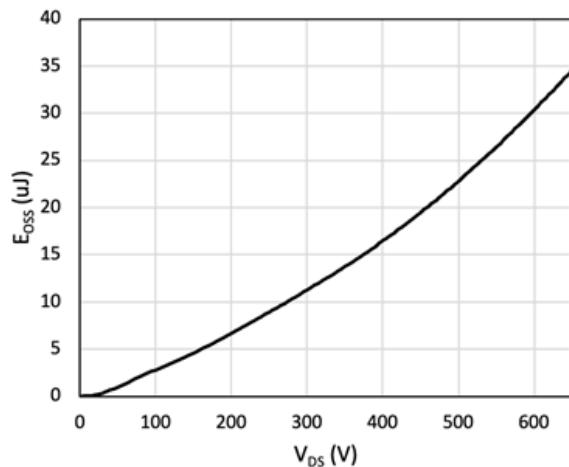
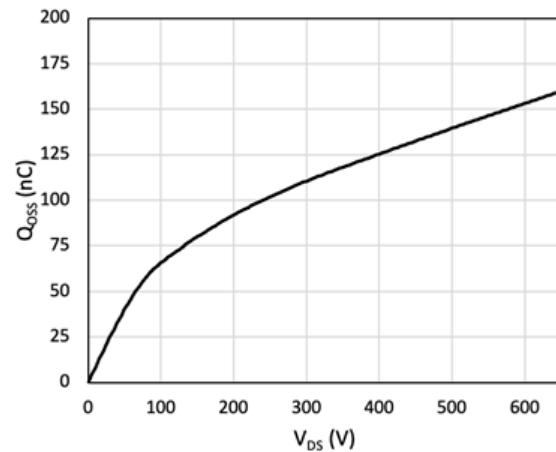
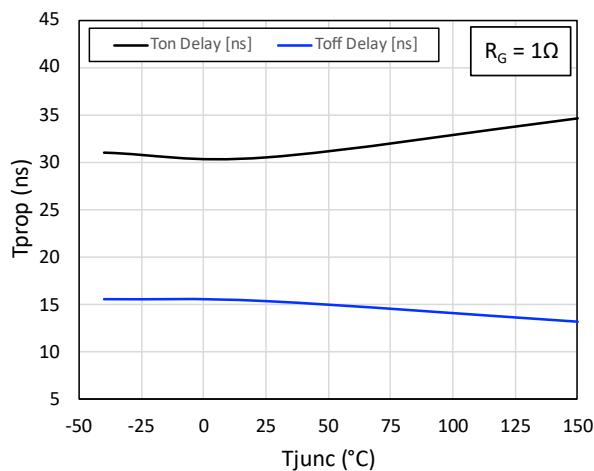
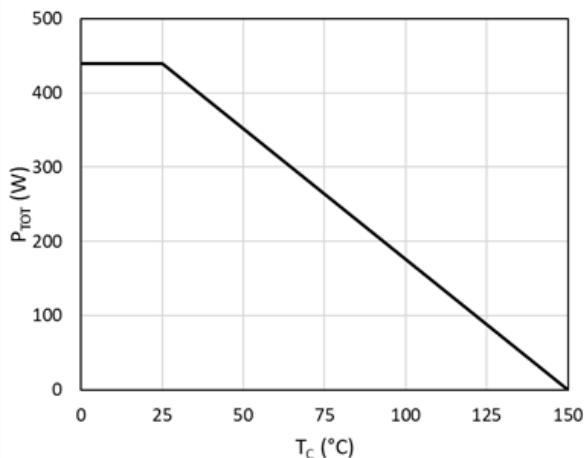
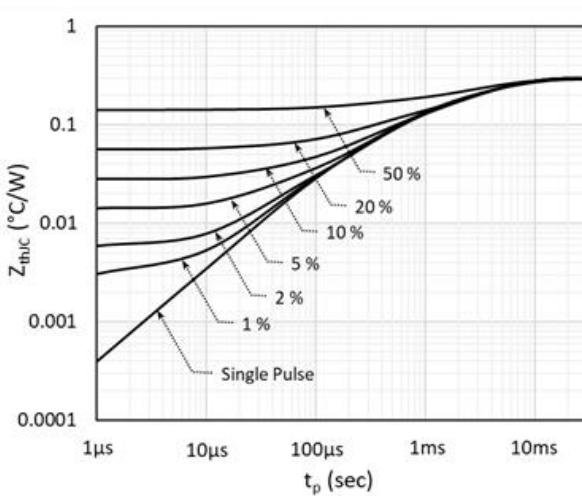
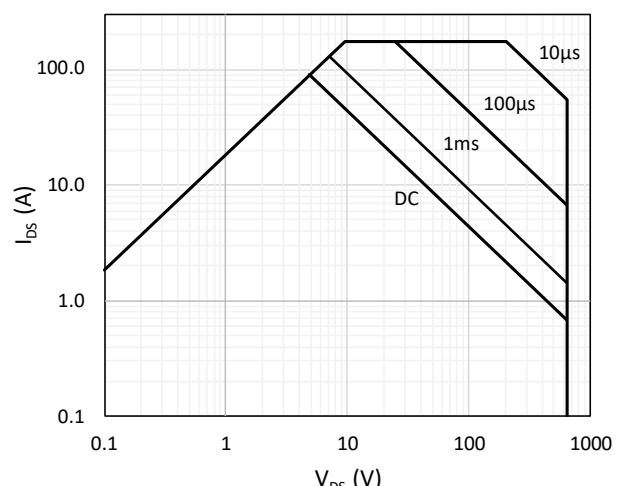


Fig. 8. C_{OSS} vs. V_{DS}


Fig. 9. E_{oss} vs. V_{DS}

Fig. 10. Q_{oss} vs. V_{DS}

Fig. 11. t_{PROP_ON, OFF} vs. T_{JUNC}

Fig. 12. P_{DISSIPATION} vs. T_{CASE}

Fig. 13. Transient R_θ_{JUNC-CASE}

Fig. 14. Safe Operating Area, T_{CASE} = 25°C

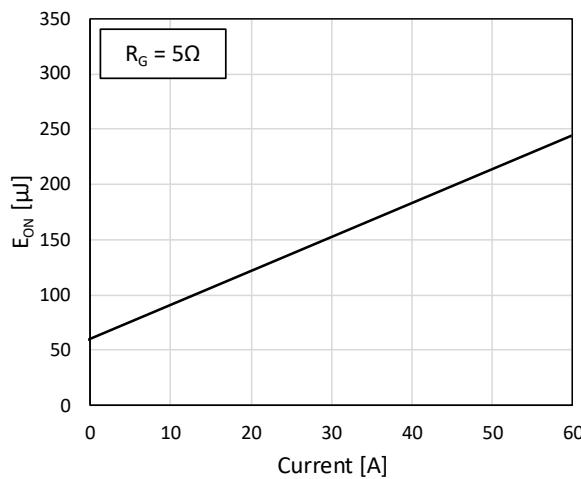


Fig. 15. E_{ON} vs. I_{DS} , $T_{JUNC} = 25^{\circ}\text{C}$

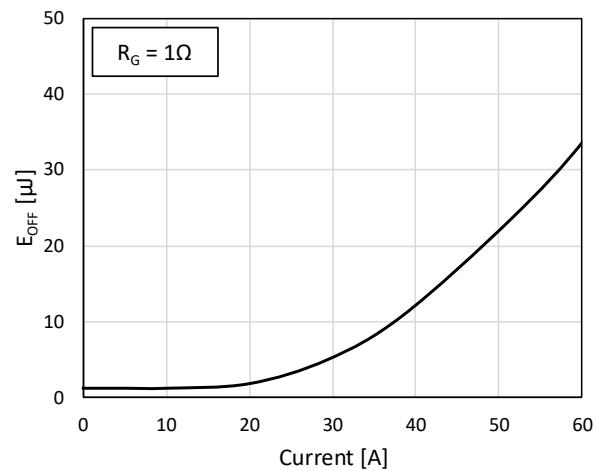


Fig. 16. E_{OFF} vs. I_{DS} , $T_{JUNC} = 25^{\circ}\text{C}$

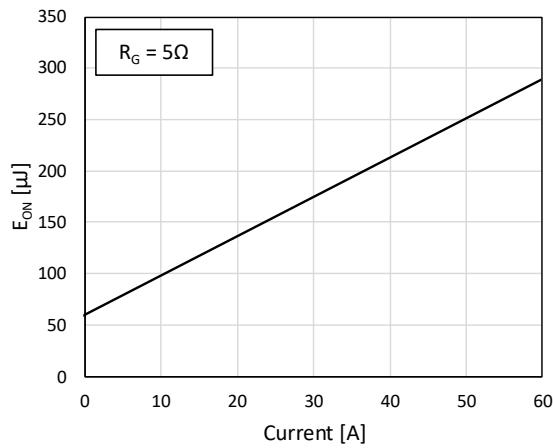


Fig. 17. E_{ON} vs. I_{DS} , $T_{JUNC} = 125^{\circ}\text{C}$

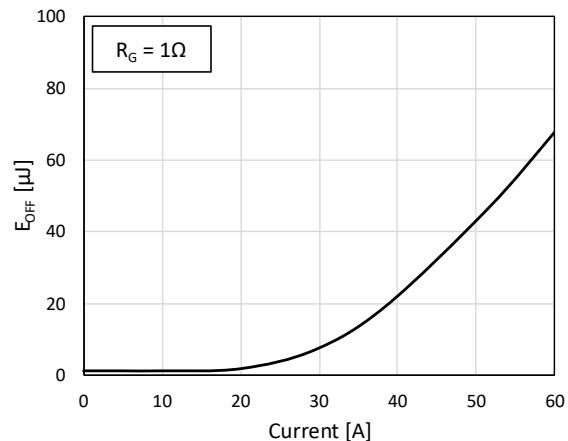


Fig. 18. E_{OFF} vs. I_{DS} , $T_{JUNC} = 125^{\circ}\text{C}$


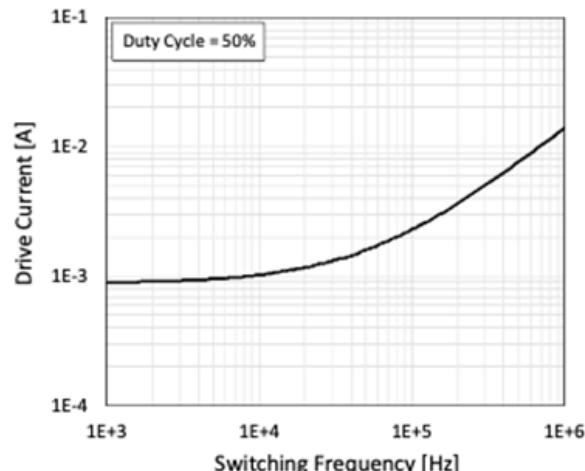


Fig. 19. I_{DRIVE} vs. Switching Frequency (F_{sw})

13. Pinout Table

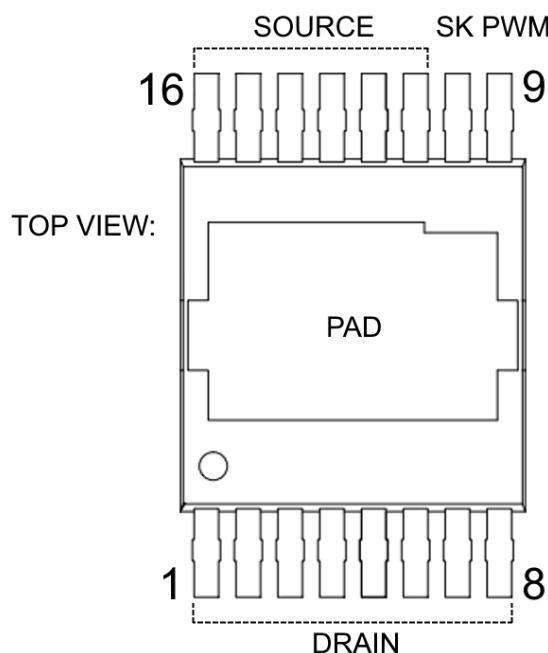

Pin		I/O (Note 8)	Description
Number	Symbol		
Top Pad	Source	G	Source of power FET and Thermal Pad for Heatsink
11-16	Source	G	Source of power FET
10	SK	G	Reference for isolated PWM output (Kelvin return for V_{DRIVE})
9	V_{DRIVE}	I	Connect isolated PWM output to V_{DRIVE}
1-8	Drain	P	Drain of power FET

(8) G = Ground, I = Input, P = Power

14. Functional Description

14.1. GaNSafe Operation: Internally-regulated V_{GS} and Block Diagram

GaNSafe power IC's are the industry's first GaN power devices allowing high speed operation in an industry-standard 4-Pin package (Drain / Source / V_{DRIVE} / SK) ~ **also providing regulated V_{GS} and protection & performance features!**

V_{DRIVE} Pin is a patent-pending multi-function input for BOTH isolated PWM signal AND internal bias power for the GaN power IC. GaNSafe is optimized for synchronous operation under all conditions (Start-Up and Steady-State). Achieving advanced capabilities in only 4 terminals requires an isolated PWM with ≥ 500 mA output current and ≥ 10 V (**absolute minimum**). Recommended V_{DRIVE} voltage should be ≥ 11 V. Typical V_{DRIVE} voltage should be between 12V to 13V when using Bootstrap for HS device. Typical V_{DRIVE} voltage can be up to 15V when using isolated DC-DC supply for HS device.

Minimum On-Time: GaNSafe power ICs have an integrated 5V power supply fed by V_{DRIVE} , and Level Shift & Deglitch circuits. The t_{ON_MIN} (minimum valid on-time pulse at V_{DRIVE} pin) is 75ns (sect. 10).

Internally regulated V_{GS} turns-ON the GaN gate with optimized voltage and turns-OFF at 0V. Negative gate bias is NOT required since there is an internal Miller Clamp to maintain the GaN gate OFF during PWM OFF state.

V_{DS} Rating: During switching, the Drain toggles between Source voltage and V_{IN} (650V maximum). The Drain can withstand **non-repetitive** pulses up to 800V for <100 us [see sect. 6 for $V_{DS(TRAN)}$ rating]. The platform design must have appropriate commutation loop decoupling and adhere to voltage margin.

Isolated PWM IC: A dual PWM driver such as SI8273BBD-IS1 can be used (see Sect. 14.8 Ref Schematic), and Sect. 14.9 lists other PWM drivers that are recommended.

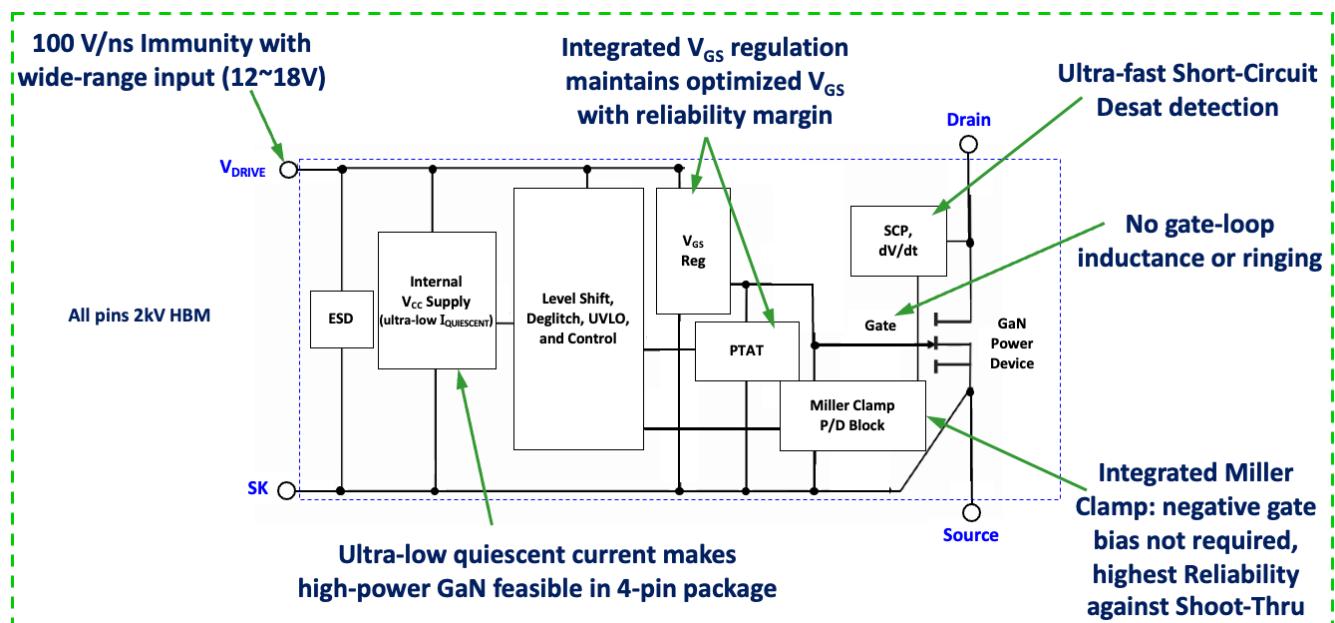


Figure 20. GaNSafe Block Diagram

14.2. Internal Gate Drive Power Loss

Internal gate drive power loss on GaNSafe power IC's can be projected by using I_{DRIVE} value from Fig. 19 (I_{DRIVE} vs. F_{SW}), interpolated between duty cycle curves, multiplied by V_{DRIVE} (i.e., $I_{DRIVE} * V_{DRIVE}$).

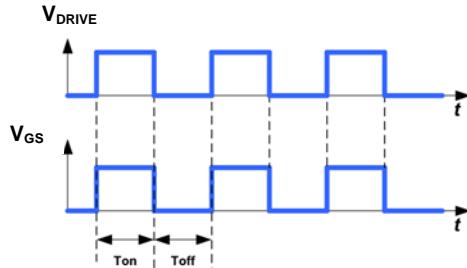


Figure 21. Normal Operating Mode Timing Diagram (V_{DRIVE} input vs. V_{GS})

14.3. Programmable Turn-ON and Turn-OFF dV/dt Control

During start-up or hard-switching condition, it may be desirable to limit slew rate (dV/dt) on the Drain. To program Turn-ON slew rate connect R_{DRIVE_ON} in series with V_{DRIVE} pin (as shown in sect. 14.8 reference schematic). Conversely, Turn-OFF slew rate is programmed using R_{DRIVE_OFF} series resistor value. These resistors ($R_{DRIVE_ON, OFF}$) set the **current** of the internal gate drive circuit, therefore setting dV/dt .

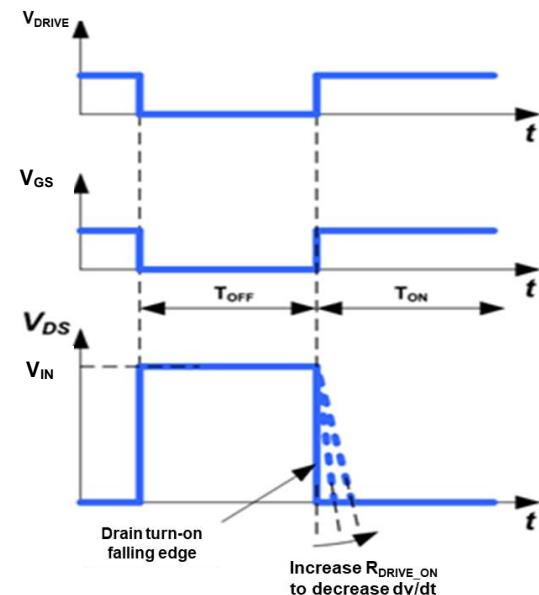


Figure 22. Turn-on dV/dt Slew Rate Control

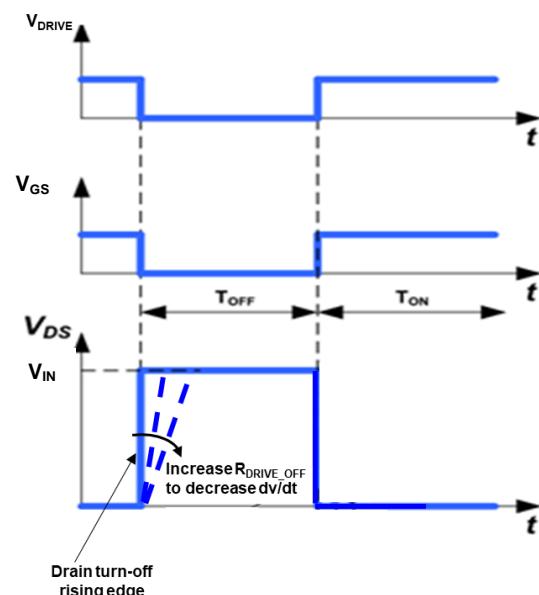


Figure 23. Turn-OFF dV/dt Slew Rate Control

14.4. Paralleling GaNSafe power IC's

GaNSafe power IC's can be paralleled up to a recommended maximum of Qty2, maintaining close T_{ON} and T_{OFF} matching of propagation delays. The following schematic revisions should be made:

- Add Kelvin-Source resistors in the return path from **each** SK Pin back to the external isolated PWM driver
- Adjust R_{DRIVE} value to assist T_{ON} / T_{OFF} matching

14.5. Short Circuit Protection

GaNSafe power ICs continuously monitor V_{DS} and trigger Short Circuit Protection (SCP) above V_{DS_SAT} trip point (listed in sect. 10). GaNSafe power ICs Turn-OFF via Soft Shutdown (S/D) after SCP is triggered, holding the GaN gate LOW on a cycle-by-cycle basis unless V_{DS_SAT} setpoint is CLEARED or until the system undergoes Power-ON Reset (POR).

V_{DS_SAT} Min/Max tolerances (listed in sect. 10) are designed to set SCP trip point $\geq 20\%$ higher than the GaN power device saturation current, up to 150C. SCP latency is 350ns including Blanking Time during Turn-ON *into* a short circuit event, but SCP latency is 50ns when a short circuit event occurs during normal switching operation.

It is critical for GaN devices to have integrated SCP (Short Circuit Protection) due to GaN's shorter SCWT (Short Circuit Withstand Time) and the need for ultra-low latency on SCP operation. However, OTP (Over Temp) & OCP (Over Current) are typically implemented via system DSP.

14.6. Design for $V_{DS(\text{CONT})}$ and $V_{DS(\text{TRAN})}$

GaNSafe power ICs have been designed and tested to provide significant design margin for continuous and transient voltage conditions, for topologies typically used in high power operation up to 22kW.

These voltage levels and recommended design margin can be analyzed using Fig. 24 below. When the GaNSafe power IC is switched off, energy stored in the output circuit causes V_{DS} overshoot (V_{SPIKE}), and after dissipation of the stored energy V_{DS} settles to the level of the bus voltage.

- For **repetitive** events, derating should be applied from $V_{DS(\text{TRAN})}$ rating (800V) to $V_{DS(\text{CONT})}$ rating (650V max) under the worst case operating conditions.
- It is recommended to design the system such that $V_{DS-\text{OFF}}$ is $\leq 520\text{V}$ (80% of $V_{DS(\text{CONT})}$ rating).
- **Non-repetitive events** are infrequent, **one-time** conditions such as line surge, ESD, and lightning strike. No derating from 800V is needed for non-repetitive V_{SPIKE} durations $< 100\text{ }\mu\text{s}$.

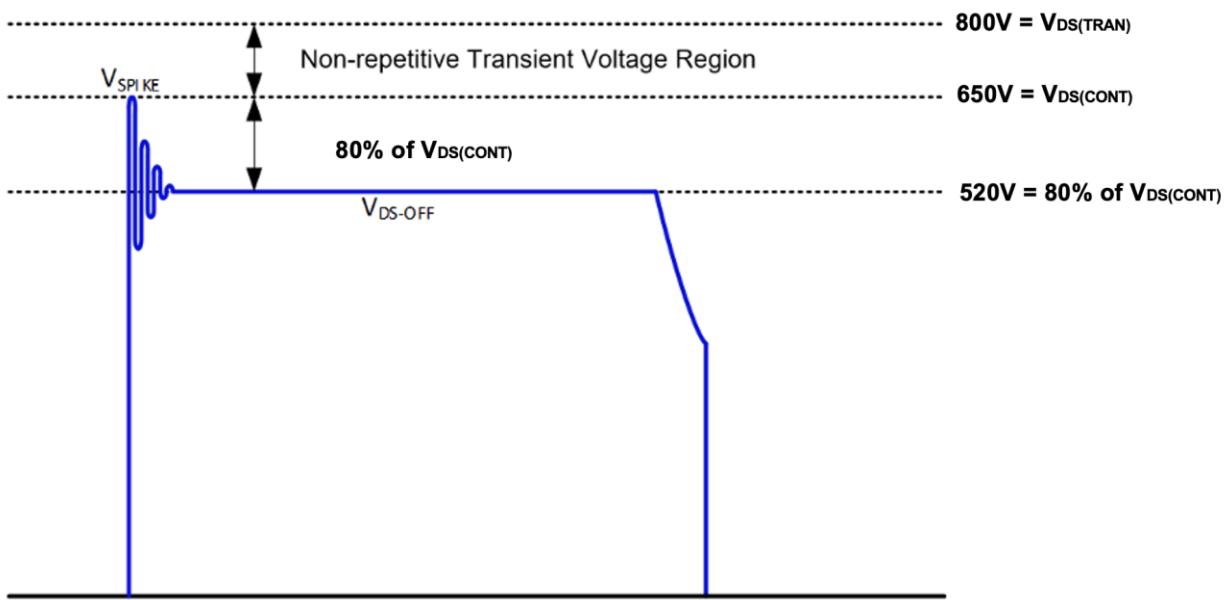


Figure 24. $V_{DS(\text{CONT})}$ and $V_{DS(\text{TRAN})}$


14.7. PCB Layout Guidelines and PCB Footprint

PCB layout is critical for thermal management, noise immunity, and proper operation of the power IC. The following rules should be followed carefully during the design of the PCB layout:

- Place IC filter and programming components **directly adjacent to the GaNSafe power IC**, and reference all these components to the SK pin.
- Place an 0402 site for MLCC between SK and V_{DRIVE} Pins (**directly adjacent to the pins**). This site may be stuffed with a 47pF MLCC if additional noise immunity on V_{DRIVE} Pin is desired.
- Observe the limits on **R_{DRIVE ON} and R_{DRIVE OFF} minimum values** in ROC Sect. 7.
- Do **not** run power SOURCE currents through SK pin!
- System-level thermal design for top-cooled packages must observe co-planarity and electrical isolation requirements when multiple power devices are cooled by the same heatsink (Cold Plate), however, GaNSafe TOLT employs negative offset gull-wing leads to help achieve thermal pad co-planarity across multiple devices. For top-side cooled packages, most heat dissipates through the top surface and should be managed with an appropriate cooling solution, considering planarity of the top thermal contact (please follow the guidelines for layout and assembly for the best performance), while for bottom-side cooling, thermal management should follow best practices based on application needs and overall system-level heat dissipation requirements.
- *The application note (AN) link will be added to the datasheet once it is ready.*




NAVITAS TOLT16L OVER
RECOMMENDED PCB FOOTPRINT

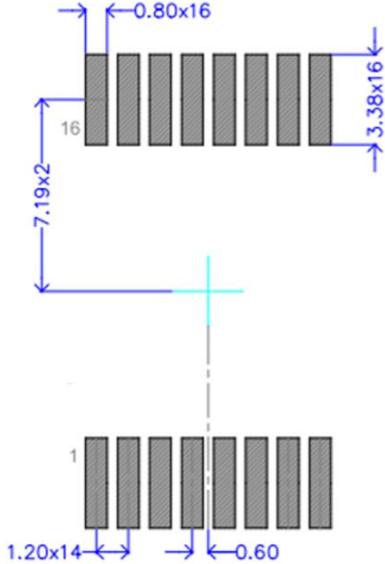

RECOMMENDED STENCIL OPENING


14.8. Reference Schematic

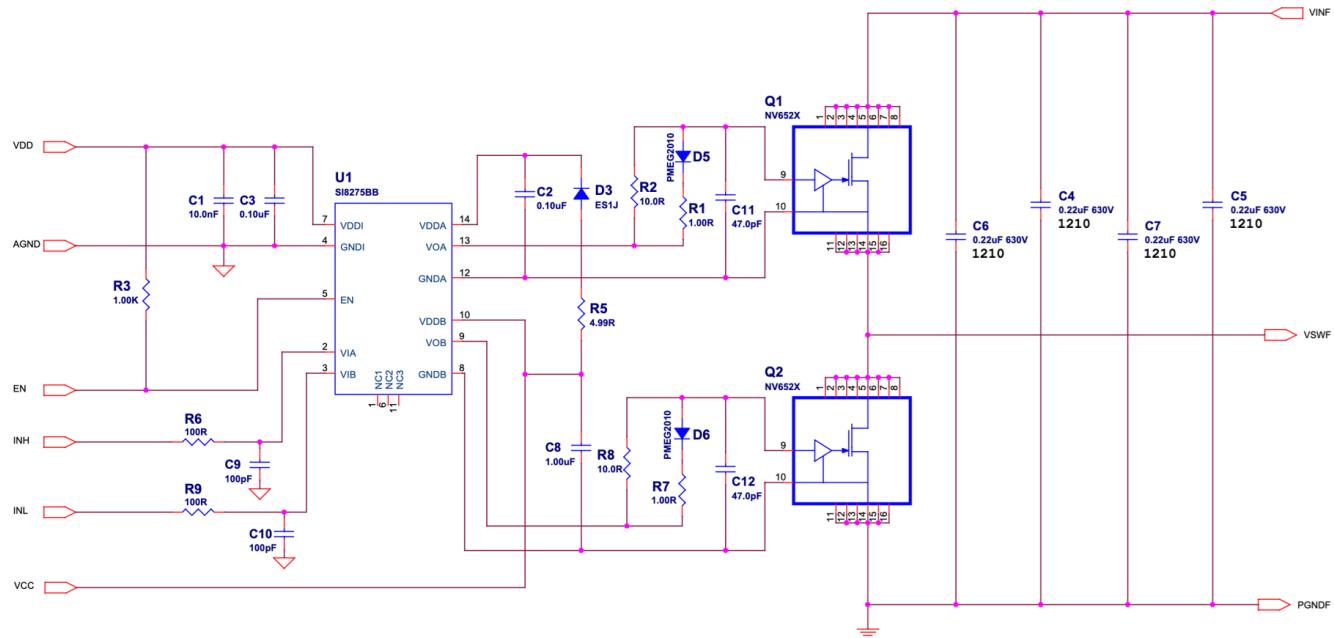

14.9. Recommended Isolator IC's:



Supplier	Isolated P/N	UVLO Setpoint	CMTI (V/ns)	Drive Strength	Channels
SkyWorks (Si Labs)	SI8273BBD-IS1	VDDI: 1.85V VDDO: 8.0V	200	1.8A source/4A sink	Dual
SkyWorks (Si Labs)	SI8275BBD-IM1	VDDI: 1.85V VDDO: 8.0V	200	1.8A source/4A sink	Dual
NovoSense	NSI6602VB-Q1SWR	VDDI: 2.5V VDDO: 8.0V	150	6A source/8A sink	Dual
NovoSense	NSI6602B-Q1SWR	VDDI: 2.35V VDDO: 8.0V	150	4A source/6A sink	Dual
Infineon	2EDF8275F	VDDI: 2.75V VDDO: 8.0V	150	4A source/8A sink	Dual
Infineon	1EDB8275F	VDDI: 2.7V VDDO: 8.0V	300	5A source/9A sink	Single

15. Package Outline Dimensions:

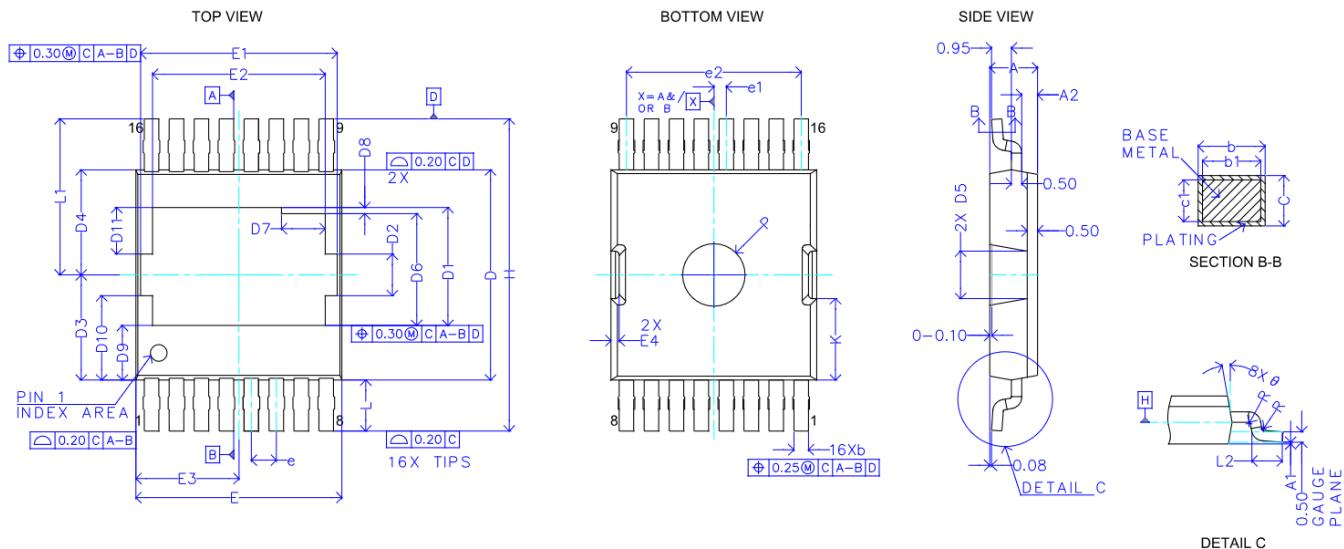

SYMBOL	MIN	MAX	SYMBOL	MIN	MAX
A	2.25	2.35	E	9.70	10.10
A1 (+)	0.01	0.11	E1	9.26	9.66
A2	0.56	0.96	E2	8.10	8.50
b	0.60	0.85	E3	4.75	5.15
b1	0.60	0.80	E4	0.20	0.60
c	0.45	0.65	e	1.20 BSC	
c1	0.45	0.60	e1	0.60 BSC	
D	10.00	10.30	e2	8.40 BSC	
D1	5.47	5.87	H	14.80	15.20
D2	1.80	2.20	K	3.71	4.11
D3	4.85	5.25	L	2.25	2.65
D4	5.00	5.13	L1	7.30	7.70
D5	2.08	2.48	L2	1.30	1.70
D6	5.17	5.57	R	0.07	-
D7	1.80	2.20	P	2.90	3.10
D8	0.10	0.50	θ	4°	10°
D9	2.42	2.82			
D10	3.85	4.25			
D11	2.04	2.44			

16. TnR Drawing and Socket Orientation

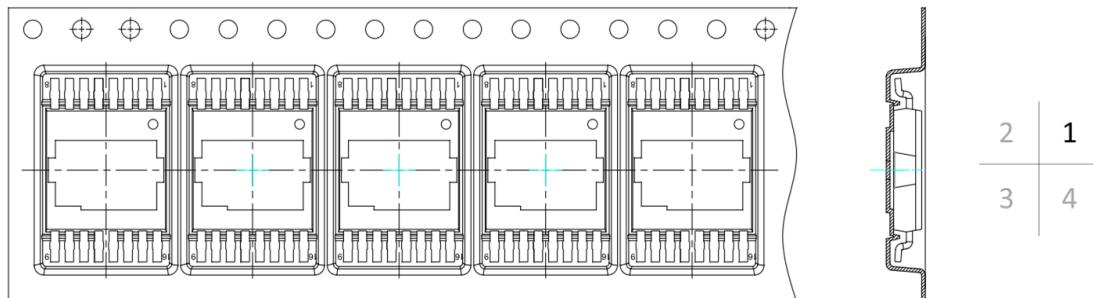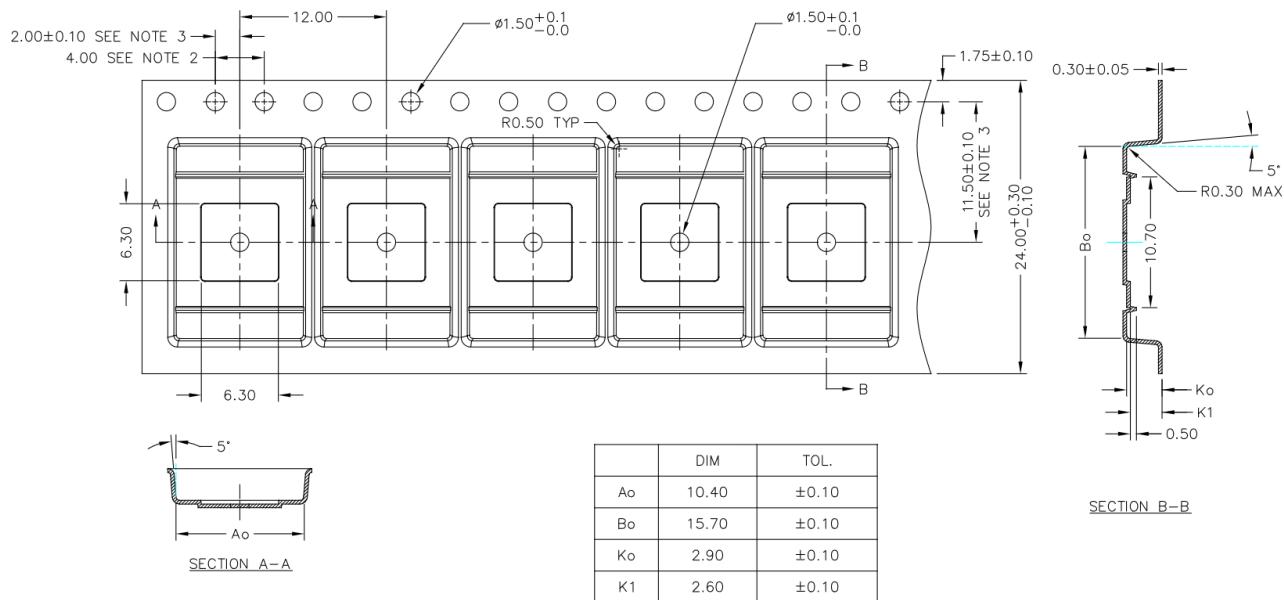

17. 20-Year Limited Product Warranty

A 20-year limited warranty applies to packaged Navitas GaNSafe power ICs in mass production, subject to the terms and conditions of Navitas' express limited product warranty (available at <https://navitassemi.com/terms-conditions>). The warranted specifications include only the MIN and MAX values listed only in Table 6 (Absolute Maximum Ratings), Table 8 (ESD Ratings), and Table 10 (Electrical Characteristics) of this datasheet. Typical (TYP) values or other specifications are not warranted.



18. Ordering Information

Part Number	Qualification	Package	MSL Rating	TnR Sizes/Qtys
NV6524	JEDEC	TOLT-16L Top-cooled SMD	3	Standard (13" dia) Qty1,500
NV6524-RA				Mini-Reel (7" dia) Qty450
NV6524Q				Standard (13" dia) Qty1,500
NV6524Q-RA				Mini-Reel (7" dia) Qty450

19. Revision History

Date	Status	Notes
Jul 1 st , 2024	Final	• First Datasheet Publication
Aug 1 st , 2024	Final	• Updated V _{DRIVE} ratings on Pages 1, 3, 4, and 11
Sep 17 th , 2024	Final	• Added T _{RISE} and T _{FALL} to the Electrical Characteristics table
Dec 6 th , 2024	Final	• Updated Sect. 14.9 Recommended Isolator IC part numbers
Mar 24 th , 2025	Final	• Updated V _{DRIVE} ratings; schematic & layout recommendation
May 7 th , 2025	Final	• Updated V _{DRIVE} ratings



Additional Information

EXCEPT TO THE EXTENT THAT INFORMATION IN THIS DATA SHEET IS EXPRESSLY AND SPECIFICALLY WARRANTED IN WRITING BY NAVITAS SEMICONDUCTOR ("NAVITAS"), EITHER PURSUANT TO THE TERMS AND CONDITIONS OF THE LIMITED WARRANTY CONTAINED IN [NAVITAS' STANDARD TERMS AND CONDITIONS OF SALE](#) OR A WRITTEN AGREEMENT SIGNED BY AN AUTHORIZED NAVITAS REPRESENTATIVE, (1) ALL INFORMATION IN THIS DATA SHEET OR OTHER DESIGN RESOURCES PROVIDED BY NAVITAS, INCLUDING WITHOUT LIMITATION RELIABILITY AND TECHNICAL DATA, REFERENCE DESIGNS, APPLICATION ADVICE OR TOOLS, AND SAFETY INFORMATION (COLLECTIVELY, "DESIGN RESOURCES"), ARE PROVIDED "AS IS" AND WITH ALL FAULTS; AND (2) NAVITAS MAKES NO WARRANTIES OR REPRESENTATIONS AS TO ANY SUCH INFORMATION OR DESIGN RESOURCES AND HEREBY DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

CUSTOMER RESPONSIBILITIES. This data sheet and other Design Resources provided by Navitas are intended only for technically trained and skilled developers designing with Navitas- or GeneSiC-branded products ("Products"). Performance specifications and the operating parameters of Products described herein are determined in the independent state and may not perform the same way when installed in customer products. The customer (or other user of this data sheet) is solely responsible for (a) designing, validating and testing the application, products and systems in which Products are incorporated; (b) evaluating the suitability of Products for the intended application and the completeness of the information in this data sheet with respect to such application; (c) ensuring the application meets applicable standards and any safety, security, regulatory or other requirements; (d) procuring and/or developing production firmware, if applicable; and (e) completing system qualification, compliance and safety testing, EMC testing, and any automotive, high-reliability or other system qualifications that apply.

NON-AUTHORIZED USES OF PRODUCTS. Except to the extent expressly provided in a writing signed by an authorized Navitas representative, Products are not designed, authorized or warranted for use in extreme or hazardous conditions; aircraft navigation, communication or control systems; aircraft power and propulsion systems; air traffic control systems; military, weapons, space-based or nuclear applications; life-support devices or systems, including but not limited to devices implanted into the human body and emergency medical equipment; or applications where product failure could lead to death, personal injury or severe property or environmental damage. The customer or other persons using Products in such applications without Navitas' agreement or acknowledgement, as set forth in a writing signed by an authorized Navitas representative, do so entirely at their own risk and agree to fully indemnify Navitas for any damages resulting from such improper use.

CHANGES TO, AND USE OF, THIS DATA SHEET. This data sheet and accompanying information and resources are subject to change without notice. Navitas grants you permission to use this data sheet and accompanying resources only for the development of an application that uses the Products described herein and subject to the notices and disclaimers above. Any other use, reproduction or display of this data sheet or accompanying resources and information is prohibited. No license is granted to any Navitas intellectual property right or to any third-party intellectual property right.

TERMS AND CONDITIONS. All purchases and sales of Products are subject to [Navitas' Standard Terms and Conditions of Sale](#), including the limited warranty contained therein, unless other terms and conditions have been agreed in a writing signed by an authorized Navitas representative. This data sheet, and Navitas' provision of this data sheet or other information and resources, do not expand or otherwise alter those terms and conditions.

Navitas, GeneSiC, the Navitas and GeneSiC logos, GaNFast, GaNSafe and other Navitas marks used herein are trademarks or registered trademarks of Navitas Semiconductor Limited or its affiliates. Other trademarks used herein are the property of their respective owners.

Copyright © 2024 Navitas Semiconductor Limited and affiliates. All rights reserved.