


SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles

PE71S8034



Features

- Single Pole Double Throw SMT Relay Switch
- DC to 26 GHz Frequency Range
- 2M Cycle Typical Operating Life
- 10W Average Power for Cold Switching @ 26.5 GHz
- Hot Switching Capability
- -25°C to +70°C
- Isolation 55 dB typ
- Insertion Loss 0.6 dB Typ
- VSWR 1.3:1 Typ
- +12Vdc @ 61 mA
- EAR99 Export Compliance
- RoHS & Reach Compliant

Applications

- High Performance Relay Switch
- Military Communications
- Communications Systems
- Test & Measurement

Description


The PE71S8034 is a single pole double throw electromechanical relay switch that operates from DC to 26 GHz. The design features a latching actuator with 2 coils and has a long and reliable lifespan up to 5M lifecycles typical (at low level) with excellent repeatability and thermal resistance. The innovative micro-mechanical design is in a miniature true surface mount package that's ideal for space limited applications. RF and command ports have gold plated access and the package can be mounted to a PWB using infrared reflow, forced air oven, or hand soldering processes. Impressive typical performance includes 0.6 dB insertion loss, 1.3:1 VSWR, and up to 55 dB isolation. Input power handling is rated up to 40W average power, and operating voltage is +12 Vdc with 61 mA operating current. Performance is guaranteed over -40°C to +85°C and the switch assembly is RoHS and REACH compliant.

Electrical Specifications (TA = +25°C, DC Voltage = 12 Vdc)

Switch Type	SPDT
Actuator Type	Failsafe
Switching Sequence	Break before Make
Actuator Options	Hot Switching

Description	Min	Typ	Max	Units
Frequency Range	DC		26.5	GHz
Impedance		50		
Operating Voltage	10.5	12	13	Volts
Actuating Current @ 12 Volts		61		mA
VSWR		1.3:1	2:1	
Insertion Loss		0.6	1.6	
Isolation	40	55		dB
Coil Resistance*		195		Ohms
Third Order Intermodulation**		-110		dBc
Input Power (CW)		40		Watts
(Average Power for Cold Switching (Reference RF Power Rating Table for Cold Switching))				

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles



PE71S8034

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 3	3 to 6	6 to 12.4	12.4 to 18	18 to 26.5	GHz
VSWR, Max	1.2:1	1.35:1	1.5:1	1.7:1	2:1	
Insertion Loss, Max	0.2	0.4	0.6	1	1.6	dB
Isolation, Min	50	40	40	40	40	dB
Input Power, Typ (Hot Switching)	40	25	3	1	1	Watts

Electrical Specification Notes:

Temperature: +23°C


*Coil Resistance: +/-10%

**Third Order Intermodulation @ 1730 MHz (2 carries 20W)

CAUTION: At high frequency, manual soldering may generate spikes and RF characteristics degradation, due to air gaps between PC board and relay grounds

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles

PE71S8034



Operating mode		Failsafe	
Nominal operating voltage (Vdc) (across operating temperature range)		12 (10.5 to 13)	
Coil resistance (+/-10%) (Ohms)		195	
Operating current at 23°C (mA)		61	
RF and command ports		gold plated access, infrared reflow, forced air oven or hand soldering (Compatible with "lead free" soldering processes)	
Switching time (Nominal voltage)	Making contacts	Max 5ms, including contact bounce time	
	Breaking contacts	3ms	
Life	Cold switching (Max 120 cycles/min)	1 million cycles (2 million cycles typical at low level)	
	Hot switching (Max 20 cycles/min)	500,000 cycles (1W, impedance 50Ω, V.S.W.R. <1.25)	
Insulation		Dielectric test voltage	300Vrms
		Insulation resistance at 500Vdc	> 100MΩ
Environmental protection		RoHS compliant with the directive 2011/65 & its amendment 2015/863 Waterproofness according to IEC 60529 / IP64	
Mass		7.5g max.	
Operating temperature range (°C) (With no icing nor condensation)		-25 to +70 (1)	
Storage temperature range (°C)		-55 to +85	
Shocks (According to MIL STD 202, method 213B, Cond C)		100g / 6ms, ½ sine No change of state	
Sine vibration (MIL STD 202, method 204)		Condition D : 10-2000Hz, 20g	Operating
		Condition G : 10-2000Hz, 30g	Non-operating

(1) : If coil remains permanently supplied under -25°C, internal condensation may occur and generate contact failures. For such special applications from -25°C to -40°C, please contact us.

Mechanical Specifications


Size

Length	0.591 in [15.01 mm]
Width/Diameter	0.5 in [12.7 mm]
Height	0.472 in [11.99 mm]
Weight	0.02 lbs [9.07 g]
Package Type	Surface Mount
Operating Life	2,000,000 Cycles

Connectors

RF Connector Type	SMT
-------------------	-----

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles



PE71S8034

Environmental Specifications

Temperature

Operating Range

-25 to +70 deg C

Storage Range

-55 to +85 deg C

Construction

Waterproof IAW IEC60529 / IP64

Shock

MIL STD 202, method 213B, Cond C, 100g / 6ms, ½ sine No change of state

Sine Vibration


Condition D : 10-2000Hz, 20g Operating, Condition G : 10-2000Hz, 30g Non-operating

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:


Typical Performance Data

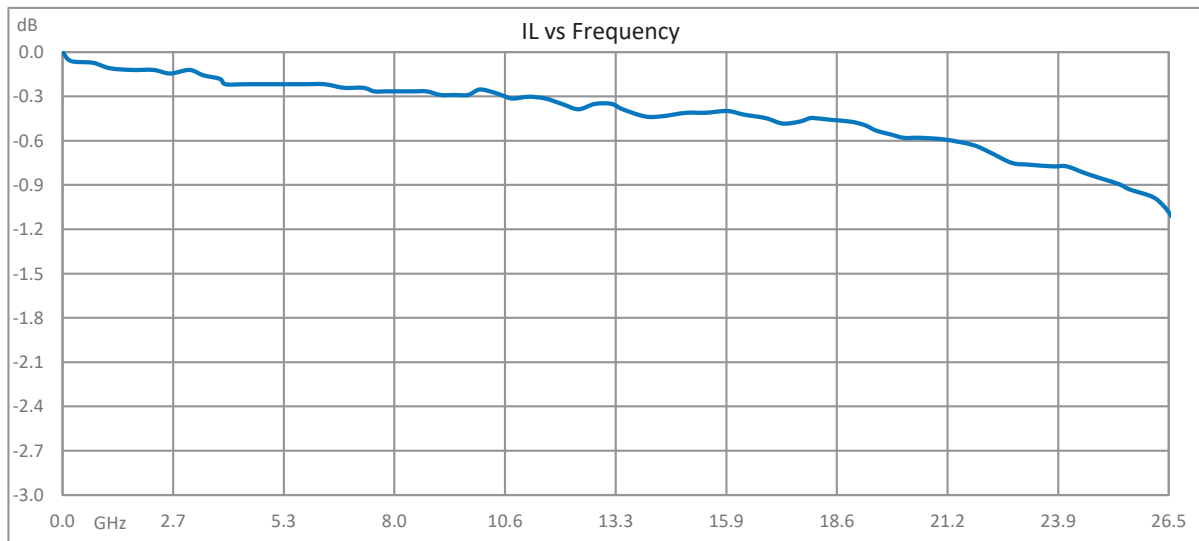


SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles




PE71S8034

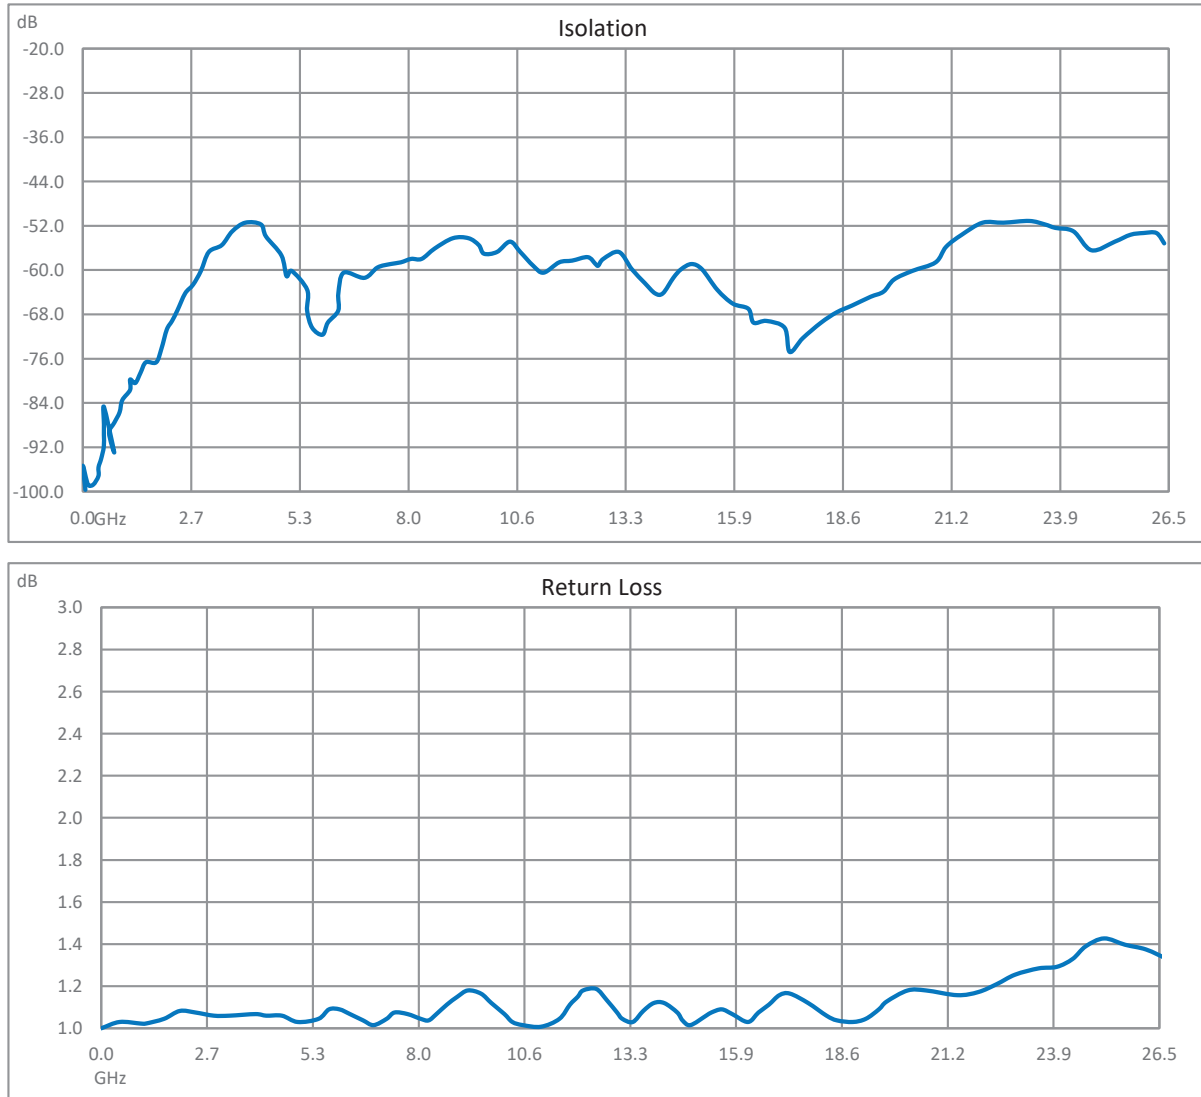

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles




PE71S8034

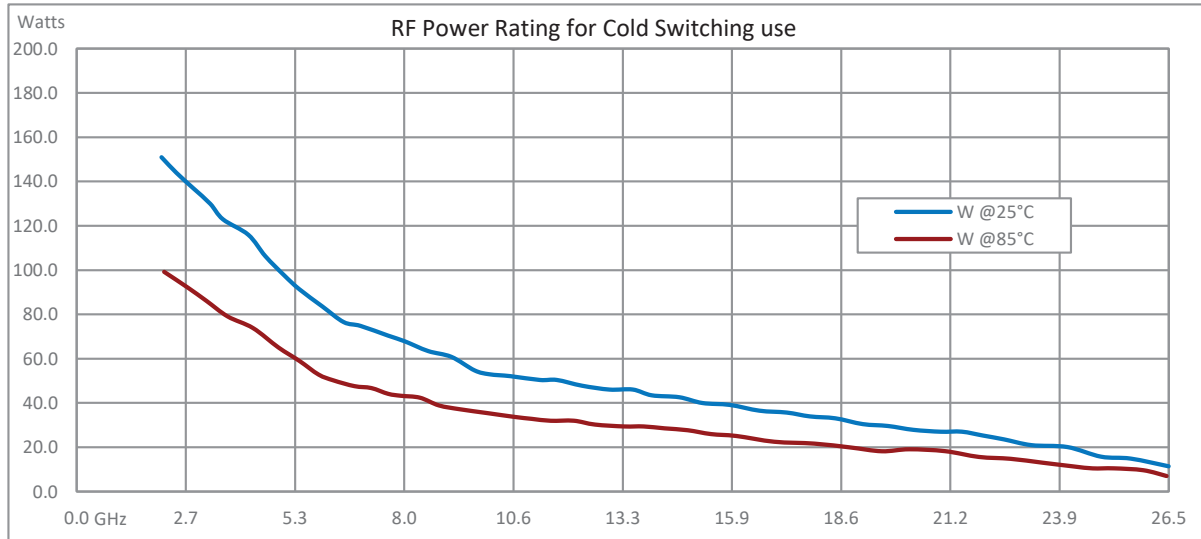


SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles


PE71S8034



Video shadow of the relay

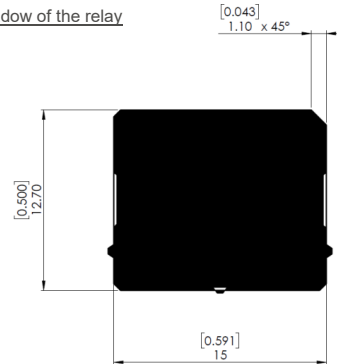

Aspiration area



All dimensions are in millimeters [inches].

PC BOARD MOUNTING

Substrate Types


Recommended substrates are ROGERS RO4003.,
Thickness 0.508 mm Cu double side 17.5µm.
Recommended total thickness of RF tracks
(copper over thickness + plating) : 40µm.
Other substrates may be used

Board layout general outline


DXF or GERBER format file
available upon request

Relay soldering

DXF format file available upon request




Optional fixing system : 2 screws M1.2

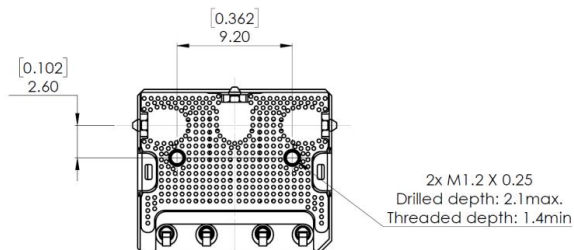

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles

PE71S8034



RECOMMENDED SOLDERING PROCEDURE

A – Soldering procedure using automatic pick and place equipment

1-Solder paste :

R516 series are « Lead Free », and Lead Free Sn-Ag3.5-Cu0.7 solder cream may be used as well as standard Sn63-Pb35-Ag2. RADIALL recommends using a « no clean - low residue » solder cream (5% solid residue of flux quantity) that will permit the elimination of the cleaning operation step after soldering.
Note : Due to the gold plating of the switch PCB interface, it is important to use a paste made with silver. This will help in avoiding formation of intermetallics as part of the solder joint.

2-Solder paste deposition :


Solder cream may be applied on the board with screen printing or dispenser technologies. For either method, the solder paste must be coated to appropriate thickness and shapes to achieve good solder wetting. Please optically verify that the edges of the zone are clean and without contaminates, and that the PCB zoned areas have not oxydated. The design of the mounting pads and the stenciling area are available upon request, for a thickness of the silk-screen printing of 0.15 mm (0.006 ").

3-Placement of the component :

For small lightweight components such as chip components, a self-alignment effect can be expected if small placement errors exist. However, this effect is not as expected for relays components and they require a accurate positioning on their soldering pads, typically +/- 0.1mm (+/-0.004"). Place the relay onto the PCB with automatic pick and place equipment. Various types of suction can be used. RADIALL does not recommend using adhesive agents on the component or on the PCB.

4-Soldering : infra-red process

Please follow the RADIALL recommended max temperature profile for infra-red reflow or forced air convection :

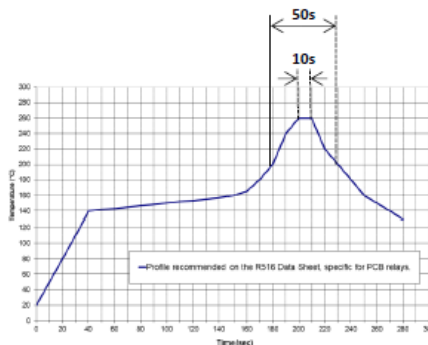

Higher temperature (>260°C) and longer process duration would damage permanently the switches.

5-Cleaning procedure :

On miniature relays, high frequency cleaning may cause the contacts to stick. If cleaning is needed, please avoid ultrasonic cleaning and use alcohol based cleaning solutions.



In-line cleaning process, spraying, immersion, especially under temperature, may cause a risk of degradation of internal contacts. For such cleaning process please contact us.

6-Quality check :

Verify by visual inspection that the component is centred on the mounting pads.

Solder joints : verify by visual inspection that the formation of meniscus on the pads are proper.

B – Soldering procedure by manual operation



: manual soldering is not recommended for high frequencies, as it generates resonance and lower RF characteristics due to gaps between PC board and relay grounds..

1-Solder paste and flux deposition :

Refer to chapter A – 1

Deposit a thin layer of flux on solder paste area.

Allow the flux to evaporate a few seconds before applying the solder paste, this will prevent dilution of the paste.

2-Solder paste deposition :

RADIALL recommends depositing a small amount of solder paste on solder pad area by syringe, according to the manual soldering pattern (available upon request). Be careful, not to apply solder paste outside of the zone area.

3-Placement of the component :

During manipulation, avoid contaminating gold surfaces by contact with fingers.

Place the component on the mounting zone by pressing on the top of the relay lid.

4-Hand soldering :

Iron wattage 30 to 60 W.

To keep better RF characteristics, apply pressure on the relay lid during all the soldering stage, so as to reduce the air gap between the PC board and the relay.

If possible, fix the ground plane of the relay on the board with two M1.2 screws before the soldering stage. On each side of the central RF access, the RF body edge must be soldered to the ground of the PC board. To improve RF characteristics and avoid soldering the RF body on the ground, a conductive gasket may be used (please contact us for detailed application note).

5-Cleaning procedure :


Refer to chapter A – 5.

6-Quality check:

Verify by visual inspection that component is centred on the mounting pads.

Solder joints : verify by visual inspection that there is no solder excess on the RF pads.

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles



PE71S8034

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles PE71S8034](https://www.pasternack.com/spdt-electromechanical-relay-failsafe-switch-26.5-ghz-10w-12v-hot-switching-smt-pe71s8034-p.aspx)

URL: <https://www.pasternack.com/spdt-electromechanical-relay-failsafe-switch-26.5-ghz-10w-12v-hot-switching-smt-pe71s8034-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE71S8034 CAD Drawing

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles

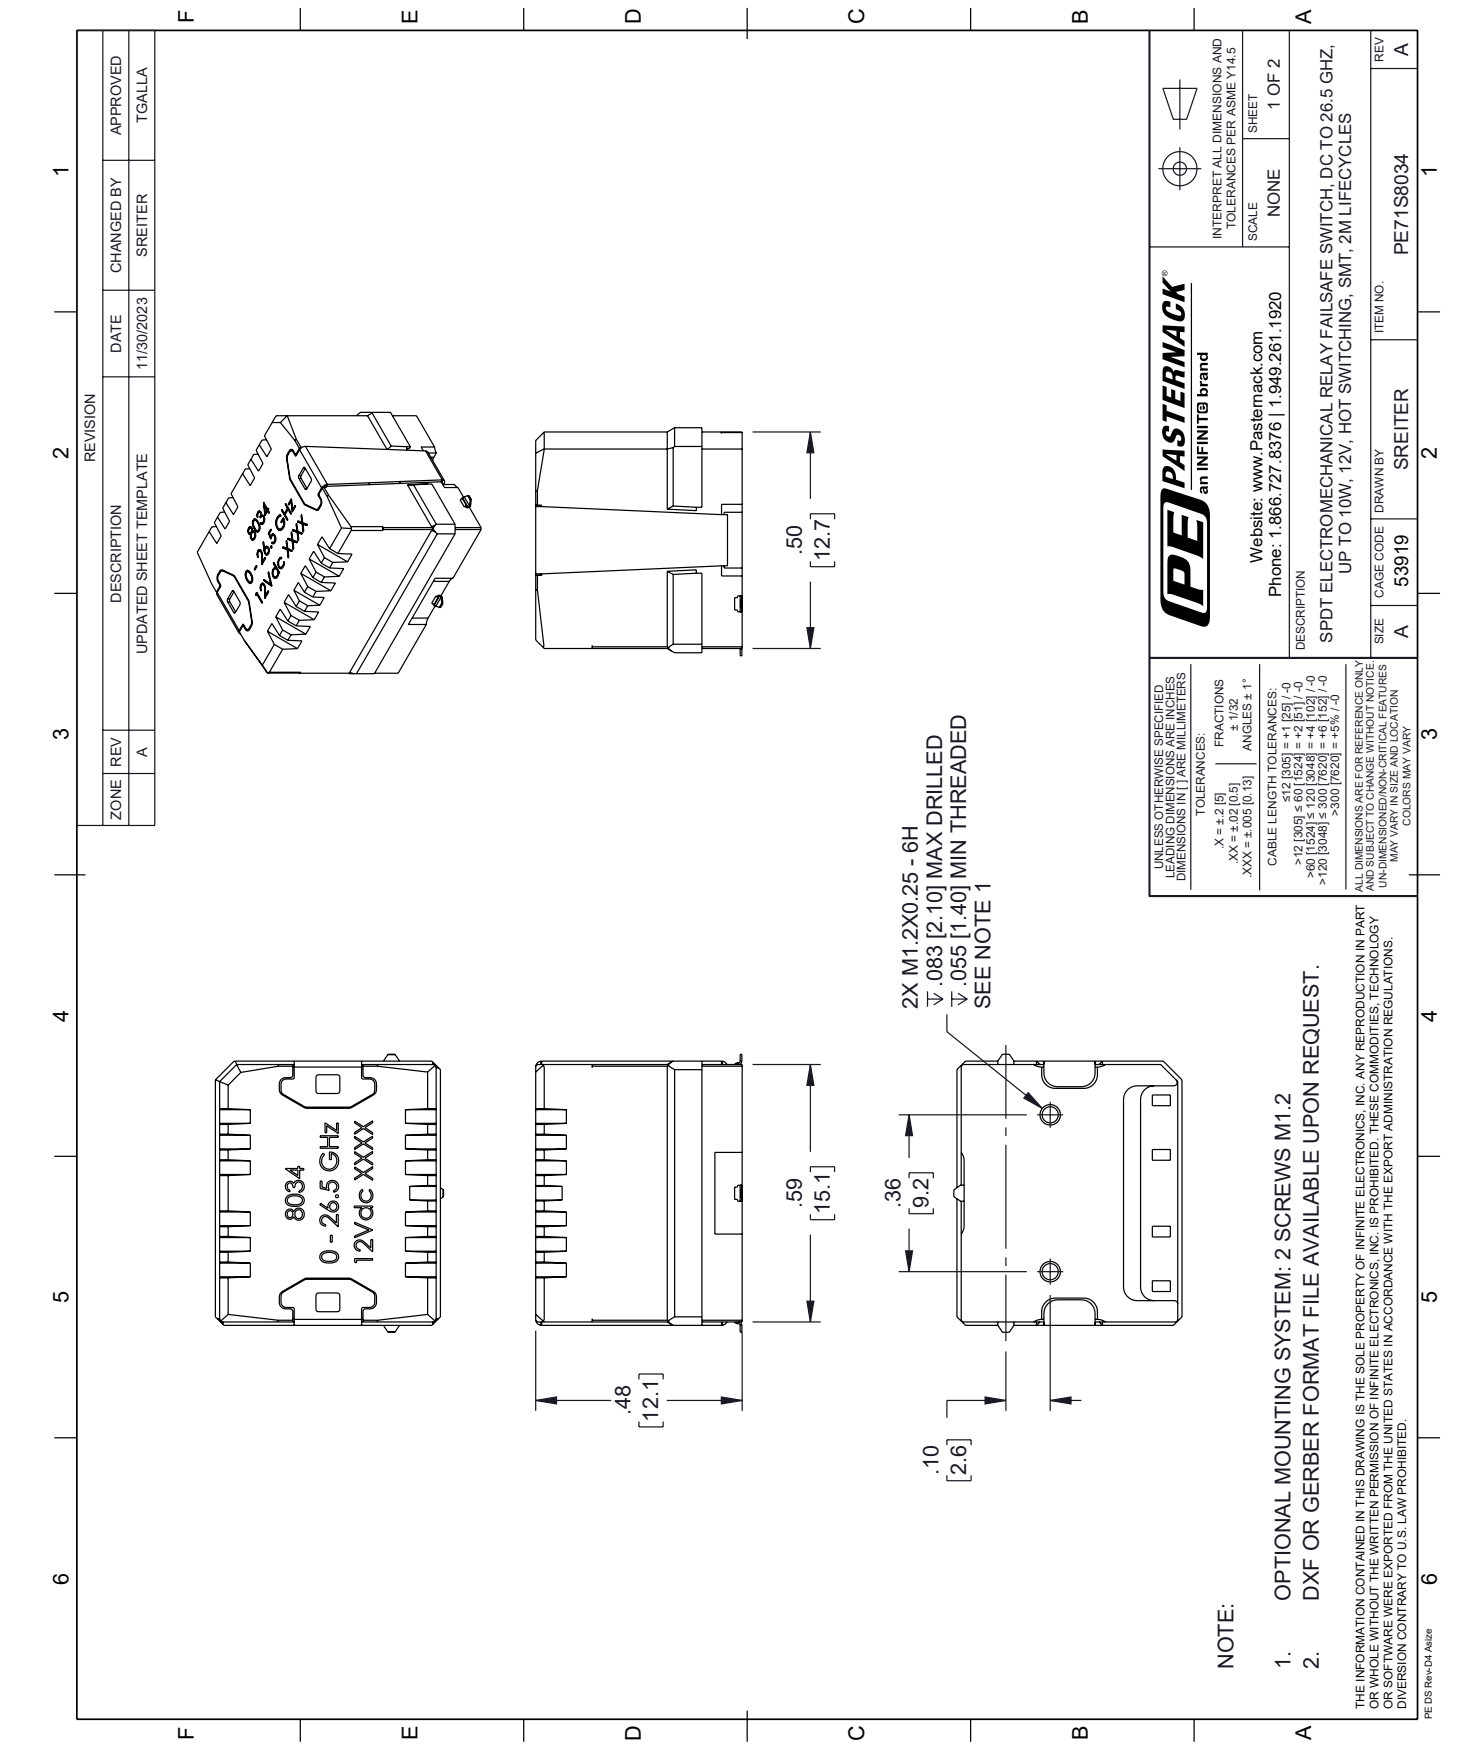

PE71S8034 CAD Drawing

SPDT Electromechanical Relay Failsafe Switch, DC to 26.5 GHz, up to 10W, 12V, Hot Switching, SMT, 2M Lifecycles

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567