

THIS IS ISSUED IN STRICT CONFIDENCE
THAT IT IS NOT USED AS A BASIS FOR
MANUFACTURE OR SALE AND THAT IT IS
NOT COPIED, REPRINTED OR
DISCLOSED TO A THIRD PARTY EITHER
WHOLLY OR IN PART WITHOUT THE
PRIOR WRITTEN CONSENT OF CAL TEST
ELECTRONICS, INC.


REVISONS

REV.	DESCRIPTION	DATE	APPROVED
A	CLASS A RELEASE (REFERENCE DWG P283700).	8/6/2025	B. Hansen

D NOTES:

1. MATERIAL:
 - INNER JACKET: PVC, WHITE.
 - OUTER JACKET: PVC, SEE MODEL NUMBER TABLE.
 - CONDUCTOR: 7x22(154)/0.08±0.08 mm, (0.75 mm²), BARE COPPER, 18 AWG.
 - O.D.: Ø3.65±0.05 mm (0.144±0.002).
2. RATING:
 - VOLTAGE: 1000 V CAT IV (IEC 61010-031).
 - CURRENT: 12 A MAX.
 - TEMPERATURE: -20°C TO +80°C.
3. AVAILABLE IN 3 STANDARD LENGTHS AND IN 6 DIFFERENT COLORS - REFER TO MODEL NUMBER TABLE
4. RoHS 2 COMPLIANT.

C 5. MARKING: CT PVC DJ 0.75mm² □ Cal Test Electronics.

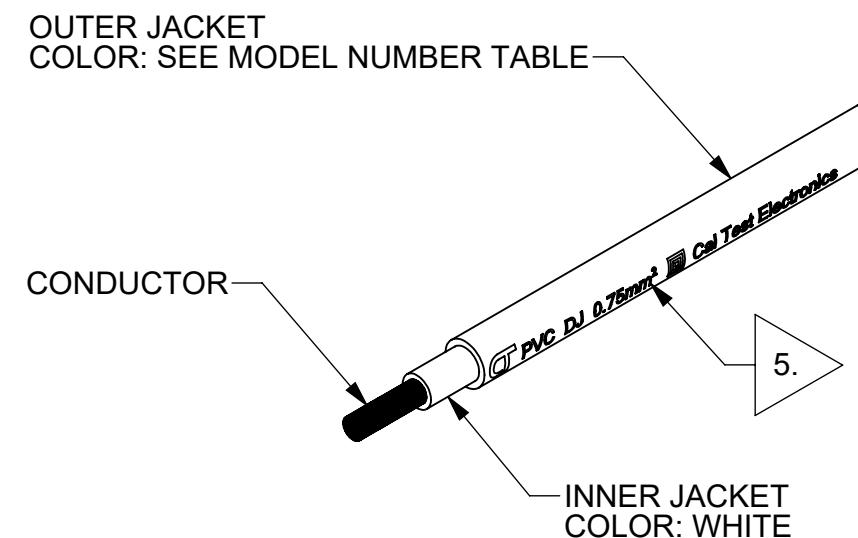

MODEL NUMBER
CT2837A-#-L

LENGTH: **10** - 10 m PACKAGE
50 - 50 m SPOOL
100 - 100 m SPOOL

COLOR: **0** - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: XX = ±0.5 XX* = ±0.5* XXX = ±0.25 XXX* = ±0.125 DO NOT SCALE DRAWING	PROJECT NO. A801	METRIC	Cal Test ELECTRONICS	22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA
	APPROVALS	DATE	TITLE		
	DRAWN WDH	8/6/2025			
	CHECKER				
REFERENCE	TREATMENT NONE	ENGR. B. Hansen	SIZE B	CAGE CODE 43F45	DWG. NO. CT2837A
	FINISH NONE	DESIGN ACTIVITY			REV. A
			SCALE 2:1		SHEET 1 OF 1