

## ADA-2052

### Amplifier/Doubler/Amplifier

## DEVICE OVERVIEW

### General Description

The ADA-2052 can be used as a frequency extender to enhance the frequency range of a <26 GHz synthesizer up to 52 GHz. Useful for lab testing, test and measurement, and prototype systems. It consists of an input buffer ADM-5974CH amplifier, MMD 2060HCH doubler, and output buffer AMM 6702CH amplifier to provide a +16 dBm output (suitable for driving most mixers) from a -6 to +2 dBm input.



### Features

- Input Frequency Range 10.5 – 26 GHz
- Output Frequency Range 21 - 52 GHz
- Input Power -6 to +2 dBm
- Output Power +16 dBm
- 1F Harmonic suppression 30 dBc
- 3F Harmonic suppression 26 dBc

### Applications

N/A

### Functional Block Diagram



### Part Ordering Options

Part Number	Description	Connectors	Green Status	Product Lifecycle	Export Classification
ADA-2052	Amplifier/Doubler/Amplifier	Standard	REACH RoHS	Released	EAR99

## Table Of Contents

### ■ Device Overview

General Description  
Features  
Applications  
Functional Block Diagram

### ■ Port Configuration and Functions

Port Diagram  
Port Functions

### ■ Revision History

### ■ Specifications

Absolute Maximum Ratings  
Package Information  
Recommended Operating Conditions  
Sequencing Requirements  
Electrical Specifications  
Typical Performance Plots

### ■ Mechanical Data

Outline Drawing


## Revision History

Revision Code	Revision Date	Comment
-	2019-02-01	Datasheet Initial Release
A	2020-01-01	Added Sequencing Requirements
B	2020-06-01	Updated Outline Drawing and Port Diagram
C	2020-08-01	Updated Chipset Information
D	2022-08-01	Updated Frequency Coverage




## Port Configuration and Functions

### Port Diagram

A top-down view of the ADA-2052 outline drawing is shown below.

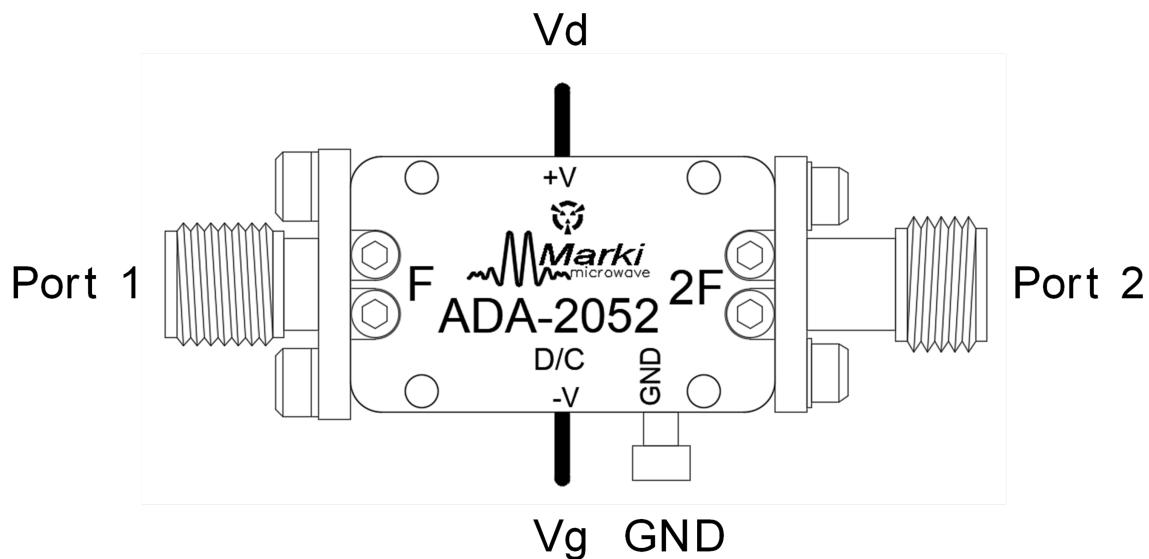

### Port Functions

Port	Function	Connector Type	Description	DC Equivalent Circuit
GND	Ground	-	Ground path is provided through the metal housing and outer ground lug.	
Port 1	Input	SMAF	This pin is DC open and matched to 50 Ω at frequency range 10.5 - 26 GHz.	
Port 2	Output	1.85F	This pin is DC open and matched to 50 Ω at frequency range 21 - 52 GHz.	
Vd	Positive bias	-	Drain bias port must be connected to a 3.5 – 5.0 Volt power supply.	
Vg	Negative bias	-	Gate control for the amplifier must be connected to a -0.5 to -0.6 Volt power supply.	

## Specifications

### Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	85	°C
Maximum Storage Temperature	150	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Negative Bias Current	2	mA
Negative Bias Voltage	-2	V
Positive Bias Current	550	mA
Positive Bias Voltage	5	V
Power Dissipation	2.5	W
RF Input Power	20	dBm

### Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	21.84 x 13.21 mm

### Recommended Operating Conditions

Parameter	Min	Nominal	Max	Unit
Gate Bias DC Voltage (Vg)	-0.6	-0.5	-	V
Positive DC Voltage (Vd)	3.5	5	-	V

### Sequencing Requirements

#### Turn-on Procedure:

- 1) Apply -0.6V to Vg
- 2) Apply Vd

#### Turn-off Procedure:

- 1) Turn off Vd
- 2) Turn off Vg

## Electrical Specifications






The electrical specifications apply at TA=+25°C in a 50Ω system. Suppression is relative to doubled output power. Isolation is defined as relative to the fundamental input power.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Current Consumption <sup>1</sup>	Vd: +4V	-	-	-	400	-	mA
Current Consumption <sup>2</sup>	Vg: -0.5V	-	-	-	0	-	mA
Input Power	Input = 10.5 - 26.0 GHz	-	-	-6	0	-	dBm
Output Converted Power, 2F (out)	Output = 21.0 - 52.0 GHz	-	-	14	16	-	dBm
Suppression, 1F	Output = 10.5 - 26.0 GHz	-	-	-	30	-	dBc
Suppression, 3F	Output = 31.5 - 60.0 GHz	-	-	-	26	-	dBc
Input Frequency Range	-	-	-	10.5	-	26	GHz
Output Frequency Range	-	-	-	21	-	52	GHz

<sup>[1]</sup> It is required that the negative bias be applied before or concurrent with the positive bias. The higher input power the better 2F output power and the worse 1F suppression will be, (see plot 2F Output Converted Power).

<sup>[2]</sup> It is required that the negative bias be applied before or concurrent with the positive bias.


## Typical Performance Plots

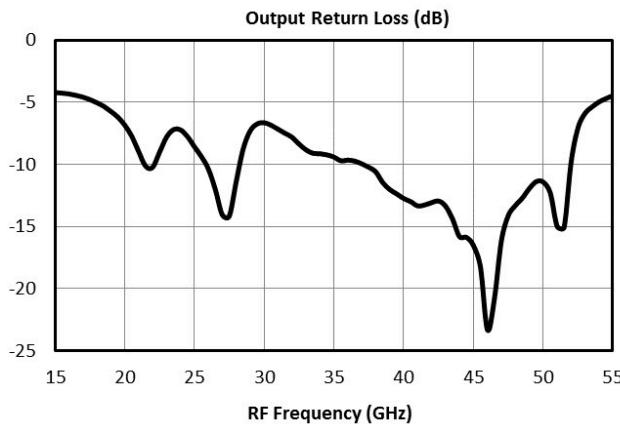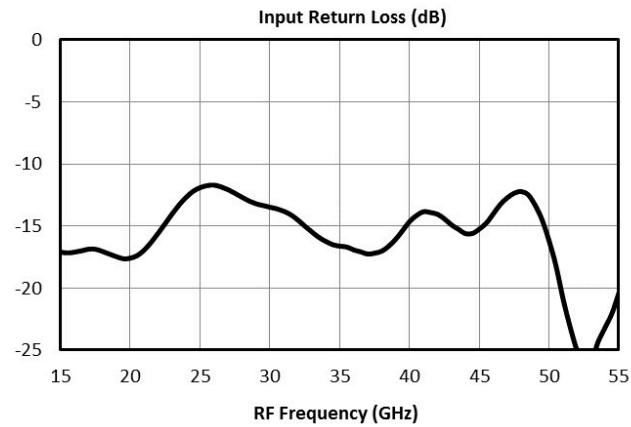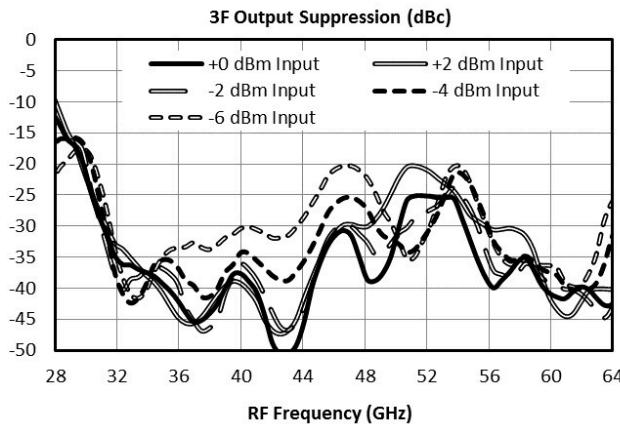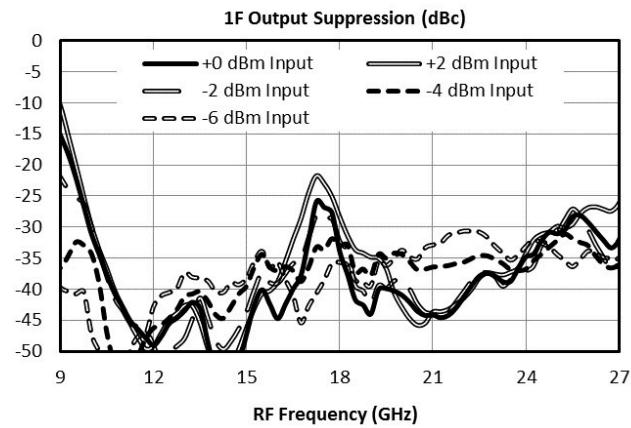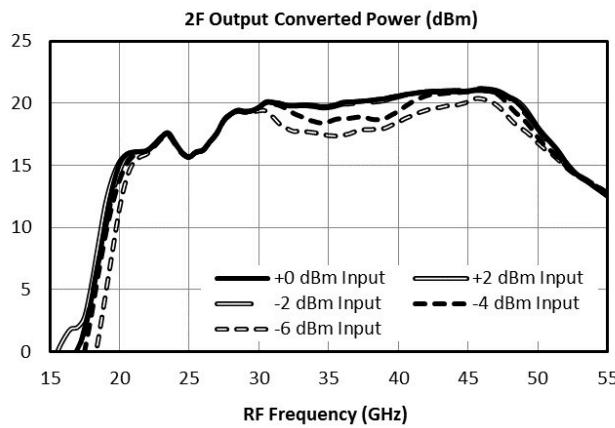

## Mechanical Data

### Outline Drawing

Download: [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

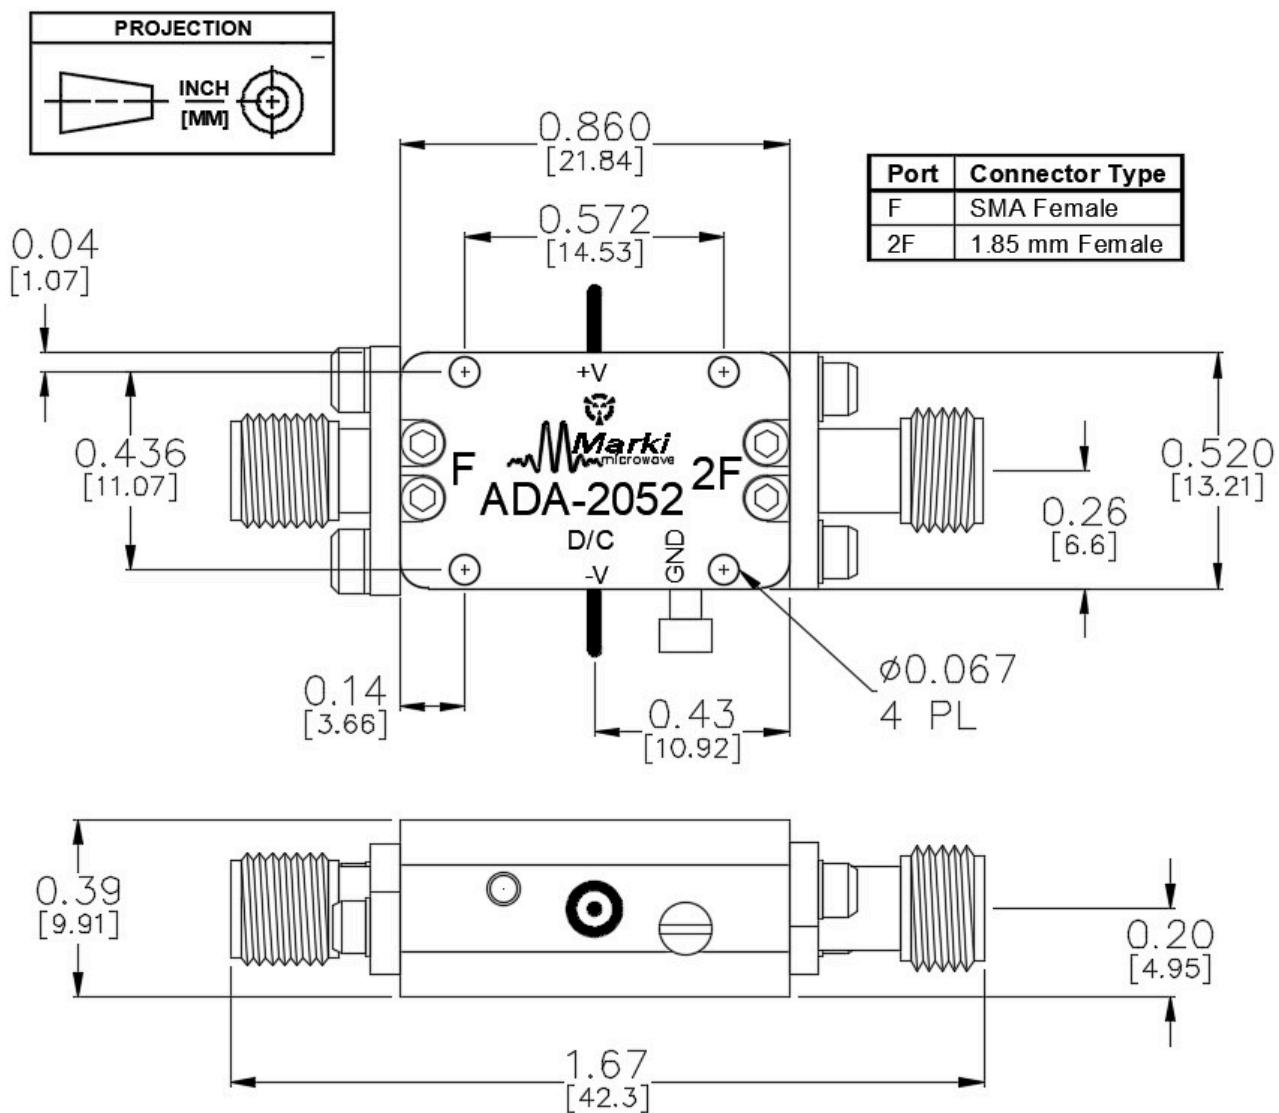

**DISCLAIMER**

MARKI MICROWAVE, LLC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, LLC. All other trademarks used are the property of their respective owners.

© 2019 - 2020, 2022, Marki Microwave, LLC