

PBR-0006

High Isolation Power Combiner

DEVICE OVERVIEW

General Description

The PBR-0006 is a 300 kHz to 6 GHz high isolation power combiner. This power combiner features a unique hand tuned construction based on a bridge coupler that enables 40 dB typical isolation across the operational bandwidth. High isolation power combiners are ideal for power combining uncorrelated signals, such as when performing intermodulation distortion (IMD) tests like IP2 and IP3. Their higher insertion loss and uncontrolled phase balance makes them unsuitable for power dividing applications.



[Download s-parameters here](#)

Features

- 300kHz to 6 GHz Power Combiner
- 40 dB Typ Isolation

Applications

- IP3 Measurement
- High Isolation test Set-ups

Functional Block Diagram

N/A

Part Ordering Options

Part Number	Description	Connectors	Green Status	Product Lifecycle	Export Classification
PBR-0006	High Isolation Power Combiner	<u>Standard</u>	REACH RoHS	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
- **Port Configuration and Functions**
 - Port Functions
- **Revision History**

- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Plots
- **Operation**
 - Application Information
- **Mechanical Data**
 - Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2015-07-01	Initial Date Released

Port Configuration and Functions

Port Functions

Port	Function	Connector Type	Description	Equivalent Circuit for Package
C	Common	SMAF	Combined output port	-
IN 1	Input 1	SMAF	RF input of the combiner	-
IN 2	Input 2	SMAF	RF input 2 of the combiner	-

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
RF Power Handling, Average	1	W

Package Information

Parameter	Details	Rating
Weight	-	40g
Dimensions	-	66.04 x 16.76 mm





Electrical Specifications

Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Amplitude Balance	-	0.0003	6	-	0.6	1.2	dB
Common Port VSWR	-	0.0003	6	-	1.3	1.8	
Input Port VSWR	-	0.0003	6	-	1.2	1.5	
Insertion Loss ¹	-	0.0003	6	-	1.5	3	dB
Isolation	-	0.01	6	33	40	-	dB
Isolation	-	0.0003	0.01	15	30	-	dB
Nominal Power Splitting (dB)	-	0.0003	6	-	6	-	dB

^[1] Excess Insertion Loss = (Input Port to Common Port Insertion Loss) - 6dB

Typical Performance Plots

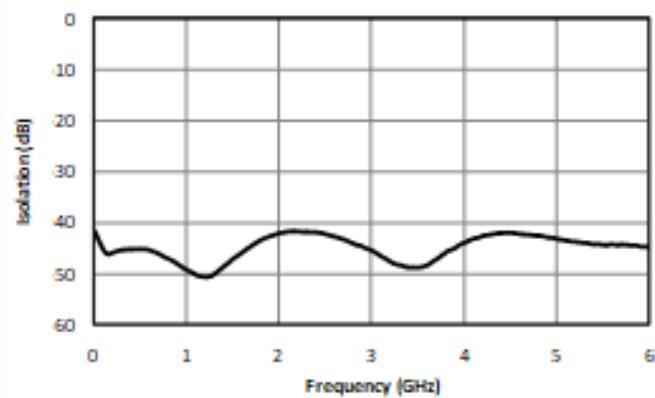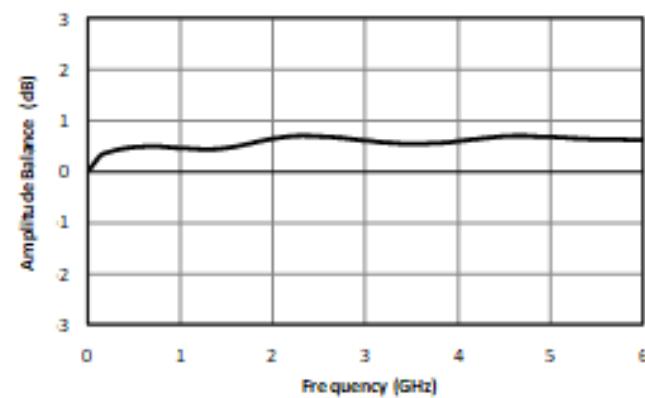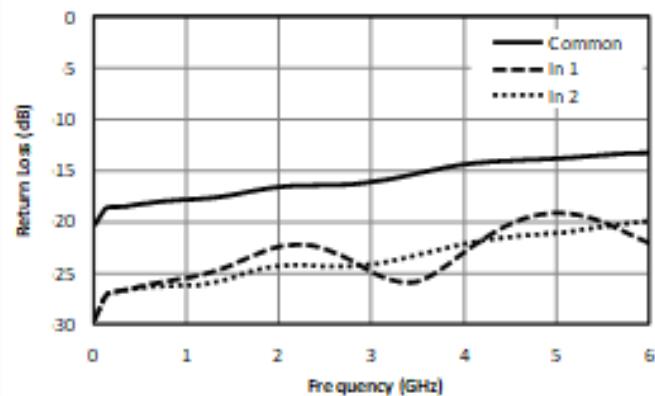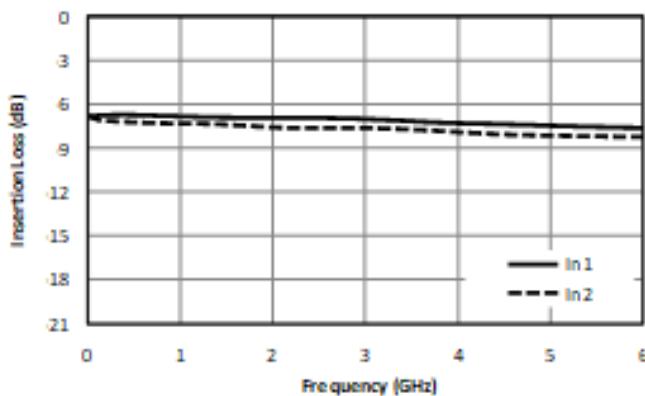

Application Information

IP3 measurement using high isolation power combiner

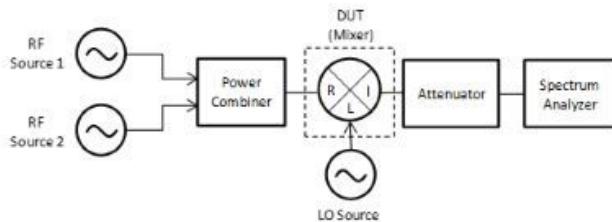


Fig. 1. Mixer IP3 measurement


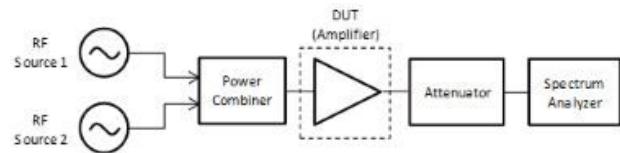


Fig. 2. Amplifier IP3 measurement

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

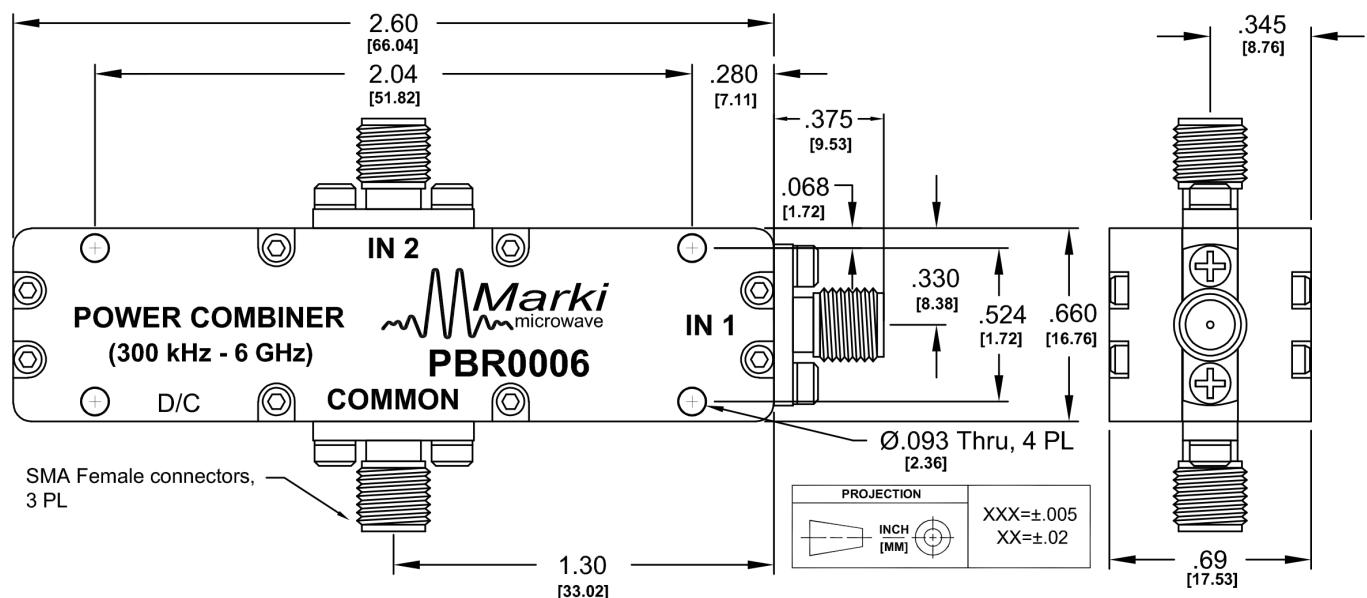

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2015, Marki Microwave, Inc