

P Series Plastic connectors



LEMO Solutions Portfolio



1 ORIGINALS

Your configurable solution

- Self-Latching Push-Pull locking
- Wide & modular range
- Broad application reach
- Indoor & outdoor

Series B, K, T
S, E



2 REDEL

Your trusted medical solution

- Medical and Industrial grade plastics
- Device ergonomics
- Electrical safety
- High density & modularity

Series P
SP
MP



3 OPTIMA

Your optimised solution

- Compact & miniature
- Lightweight & low-profile
- High vibration resistance
- IP68 & MIL-STD tested

Series M
F




4 SUPREME

Your extreme solution

- High/Low pressure
- Radiation & corrosion
- High Voltage
- Regulated environments

Series N
W
Y



5 SPECIALTIES

Your specialised solution

- Industry standards
- Special configurations
- Historical products

Series 3K.93C.Y, 00 Nim-Camac
H, V, 2G/2C, R, ...



6 CABLES

Your unique cable solution

- Design expertise
- In house prototype to production
- Custom cables
- Conductive & hybrid

Series Technical cables
Biocompatibility
Automation & high-flex
Retractable coil cords
Ruggedised

SERVICES

Cable assembly services (single-end, double-end, custom harness, overmolding, ...)

Custom solution (connector, cable, device)

Signal integrity end-to-end services

Table of contents

1P Series

Part numbering system	7
Shell style	
Standard models (IP50)	8
Elbow socket models (IP50)	12
Disposable plug	13
Disposable socket	13
Water-resistant models (IP64)	14
Fluidic configuration	16
Mains power configuration	18
Insert configuration	19
Alignment key	20
Outer shell material	20
Contact type	20
Colour coding	20
Accessories	21
Tooling	23
Panel hole	24
PCB drilling pattern	24
Assembly instructions	26

2P Series

Part numbering system	32
Shell style	
Standard models	33
Water-resistant models (IP66)	36
Fluidic configuration	38
Insert configuration	39
High Voltage – High Density - PFA models	41
Alignment key	43
Outer shell material	43
Contact type	43
Colour coding	43
Accessories	44
Tooling	46
Panel hole	47
PCB drilling pattern	47
Assembly instructions	49
Assembly instructions for high voltage configurations	51

3P Series

Part numbering system	55
Shell style	
Standard models (IP61)	56
Insert configuration	58
Contact type	59
Colour coding	59
Accessories	60
Fibre optic contact	61
Recommended coaxial cables	62
Tooling	62
Panel hole	65
PCB drilling pattern	65
Assembly instructions	66
Mechanical latching characteristics and test voltage	68
Technical tables	69
Product safety notice	70

Precision modular connectors to suit your application


Since its creation in Switzerland in 1946 the LEMO Group has been recognized as a global leader of circular Push-Pull connectors and connector solutions. Today LEMO and its affiliated companies, REDEL and COELVER, are active in more than 80 countries with the help of over 40 subsidiaries and distributors.

Over 5000 REDEL connectors

The modular design of the REDEL range provides over 5000 connectors from \varnothing 14 mm to \varnothing 21 mm, capable of handling cable diameters up to 9.5 mm and up to 32 contacts. This vast portfolio enables you to select the ideal connector configuration to suit almost any specific requirement in most markets, including medical devices, test and measurement instruments, machinery, audio video broadcast, telecommunications and military.

REDEL's Push-Pull Self-Latching Connection System

This self-latching system is renowned worldwide for its easy and quick mating and unmating features. It provides absolute security against vibration, shock or pull on the cable, and facilitates operation in a very limited space.

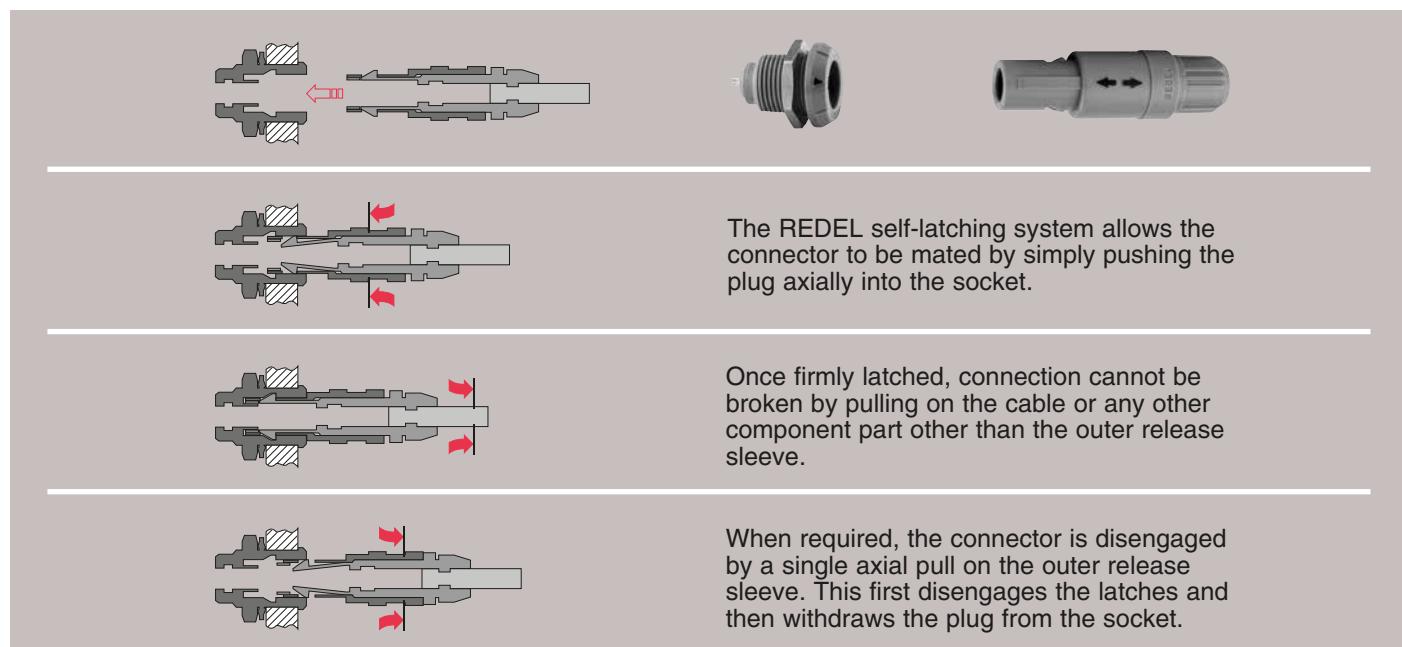

UL Recognition

REDEL connectors are recognized by the Underwriters Laboratories (UL). The approval of the complete system (REDEL connector, cable and your equipment) will be easier because REDEL connectors are recognized.

CE Marking

CE marking  means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives. CE marking  applies to complete products or equipment, **but not to electromechanical components, such as connectors**.

RoHS

REDEL connector specifications conform to the requirements of the RoHS directive (2011/65/EU) of the European Parliament and the latest amendments. This directive specifies the restrictions of the use of hazardous substances in electrical and electronic equipment marketed in Europe.

Product safety notice & disclaimers

Please read and follow all instructions specified on the last page or on our [website](#) carefully and consult all relevant national and international safety regulations for your application. Improper handling, cable assembly, or wrong use of connectors can result in hazardous situations.

LEMO products and services are provided "as is." LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security.

In no event shall LEMO be liable for any direct, indirect, punitive, incidental, special consequential damages, to property or life, whatsoever arising out of or connected with the use or misuse of LEMO's products.

REDEL connector range

REDEL connectors are high-quality plastic Push-Pull connectors designed specifically for demanding applications such as medical electronics and test and measurement. These circular plastic connectors are engineered to provide exceptional performance in rigorous environments, with a design that is both ergonomic and robust — capable of withstanding numerous mating and unmating cycles without degradation.

These connectors comply with ISO ISO 11135:2014 standards and IEC 60601-1 (3rd Edition) medical safety standards, ensuring reliability and safety in critical applications. REDEL offers a wide range of configurations, including multipole contacts, coaxial, fibre optics, and fluidic connectors, as well as single-use connectors and options for mains power. Available in three sizes to accommodate various cable diameters, our 1P and 2P models feature specially qualified inserts to meet the strictest requirements.

Features & Benefits

- **Lightweight and Durable:**

Constructed with high-performance PSU or PEI plastic

- **Reliable Sterilization (Autoclave, EtO, Gamma):**

Complies with ISO 17665:2024 sterilization standard for autoclave, ISO 11135:2014 for EtO, ISO 11137-1, -2, -3 standards for gamma, e-beam x-ray and IEC 60601-1 standards *

- **Enhanced Electrical Safety:**

Touch-proof and scoop-proof design offers maximum protection

- **Quick and Easy Identification:**

Available in a wide range of colors to facilitate fast, accurate connector identification and reduce setup errors

- **High Voltage Compliance:**

1P and 2P models meet IEC 60601-1 (3rd Edition) standards, ensuring safety and compliance in high voltage applications

- **Versatile Contact Options:**

Solder, crimp, print, and elbow print 90° contacts to suit diverse application needs

- **Single-Use Models:**

Disposable versions available as standard or on demand

* Please contact us for further information regarding sterilisation protocols, cycles and tests on our different plastic materials



Series	1P	2P	3P
Environment	indoor / splash proof	indoor / outdoor	indoor / dripping water
Ingress ¹⁾ protection	IP50 / IP64	IP50 / IP66	IP61
Temperature range	PSU: -50° / +150°C PEI: -50° / +170°C	PSU: -50° / +150°C PEI: -50° / +170°C	PSU: -50° / +150°C
Latching	Push-Pull self latching		
Insulator type	Multipole, Mains Power, Fluidic	Multipole, Hybrid: Fluidic + Low Voltage, Coaxial + Low Voltage, High Voltage	Multipole, Hybrid: High Voltage + Low Voltage, Coaxial + Low Voltage, Fibre Optic + Low Voltage, Fluidic + Low Voltage
Contact type	Solder, crimp or print		
Other	Disposable models available		—
Cable diameter	1.7 mm to 6.5 mm	3.2 mm to 9.2 mm	6.7 mm to 9.5 mm
Features	6 keyways (incl. Reverse gender configurations)	4 keyways (incl. Reverse gender configurations)	Insert Polarizations


Note: ¹⁾ mated connector.

1P SERIES




► Exploded view of the REDEL 1P


Straight plug

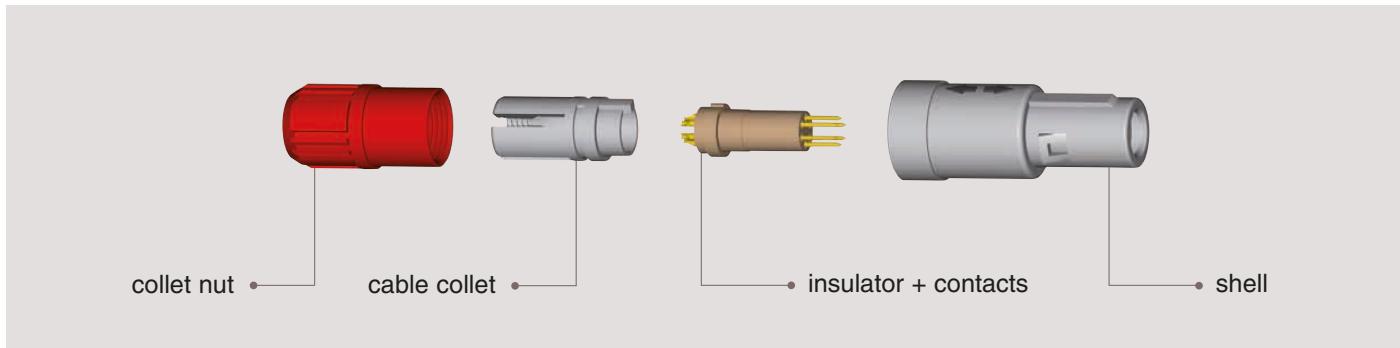


Straight plug with bend relief

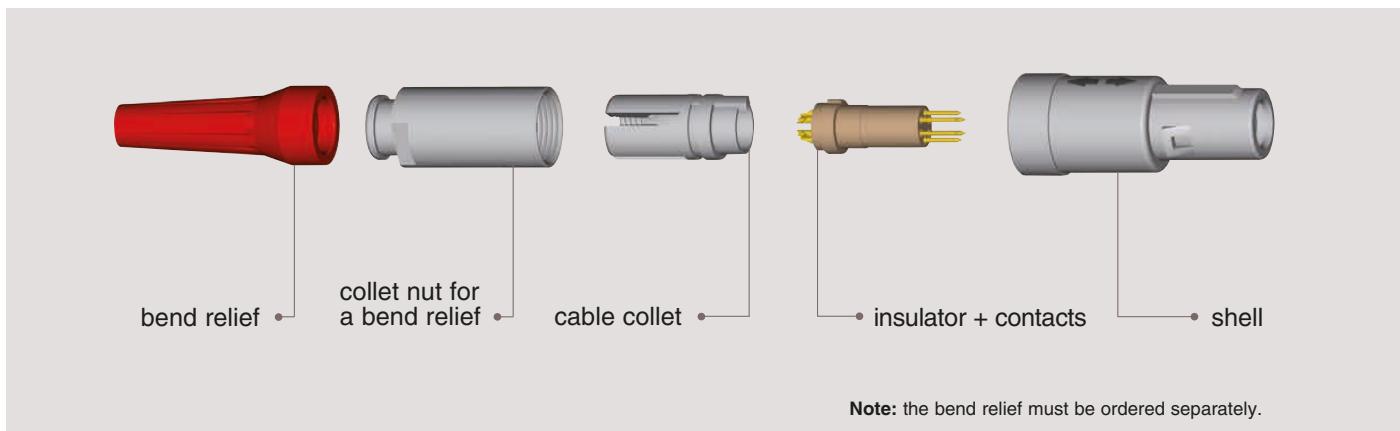

Fixed socket

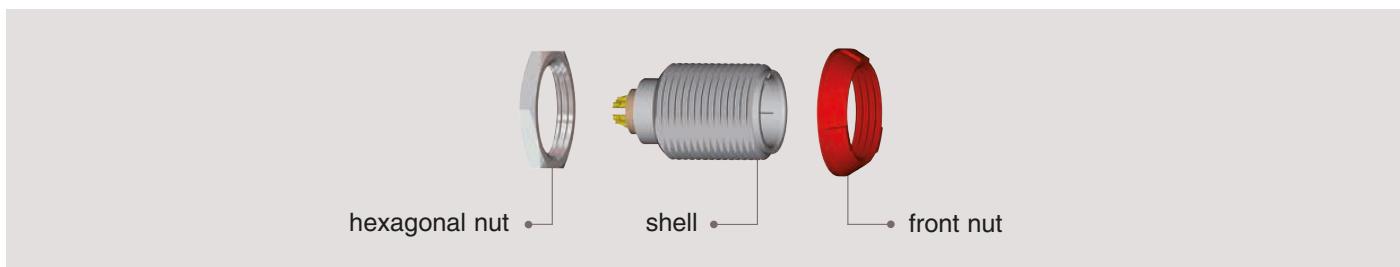


Free socket

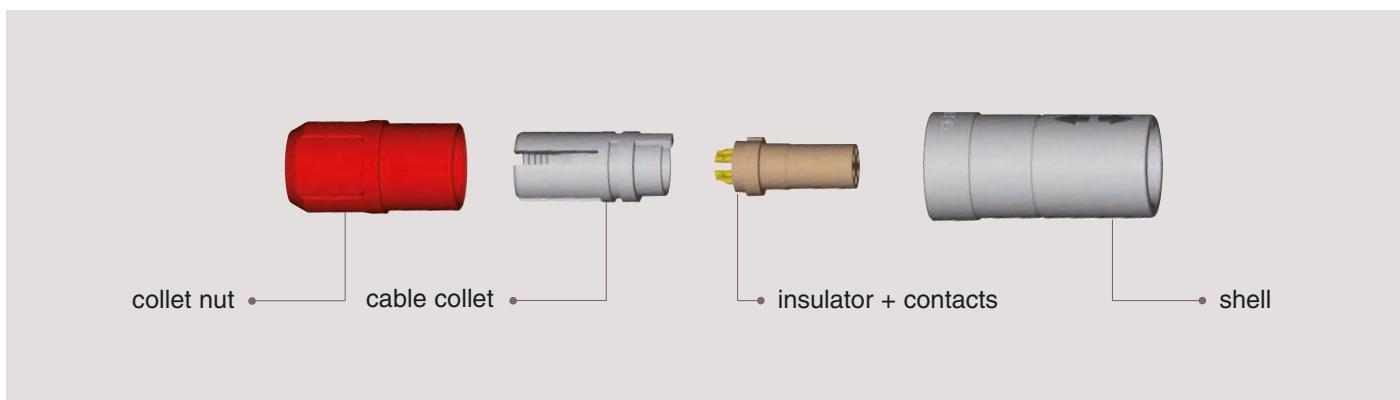


A well proven connector of a small size to accomodate cable diameter up to 6.5 mm and allow up to 14 solder contacts. Top quality lightweight and rugged materials have been chosen to optimize most applications.

The contacts are gold-plated over copper and nickel to ensure at least 5000 mating/unmating cycles without significantly affecting the electrical characteristics. A keying system combined with colour coding can be incorporated on most connector models to assist in the prevention of mismatching. Colour coding of the plug collet nut and socket flange will give an instant visual indication of connector compatibility. Mains power configurations are qualified for applications requiring IEC 60601-1 (3rd Ed.) medical safety standard.

Standard models (page 8 to 11)
Straight plugs


PA●

PA●

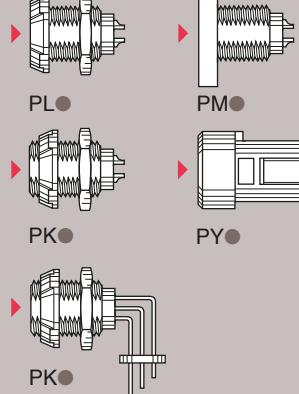
Fixed sockets


PL●

PK●


PM●

PY●

Free sockets



PR●

PR●

Elbow socket models (page 12)


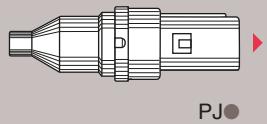
PP●

PX●


Fixed sockets


PT●


PD●

Disposable plug (limited use) (page 13)



PJ●

Disposable socket (limited use) (page 13)


PY●

IP64 water-resistant models (page 14 to 15)
Fixed socket


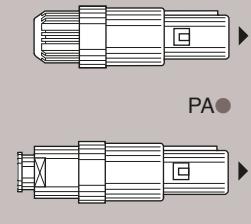
PN●

Straight plug


PF●


Free socket


PS●

Fluidic configuration (page 16 to 17)
Straight plugs



PA●

PA●


Fixed sockets


PK●

PL●




Mains power configuration (page 18)
Straight plug


PAH

Fixed socket


PKH

Part numbering system

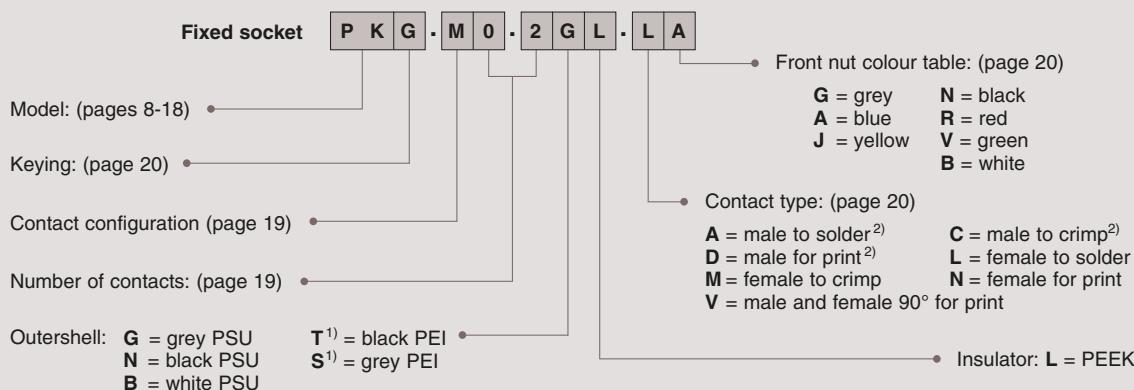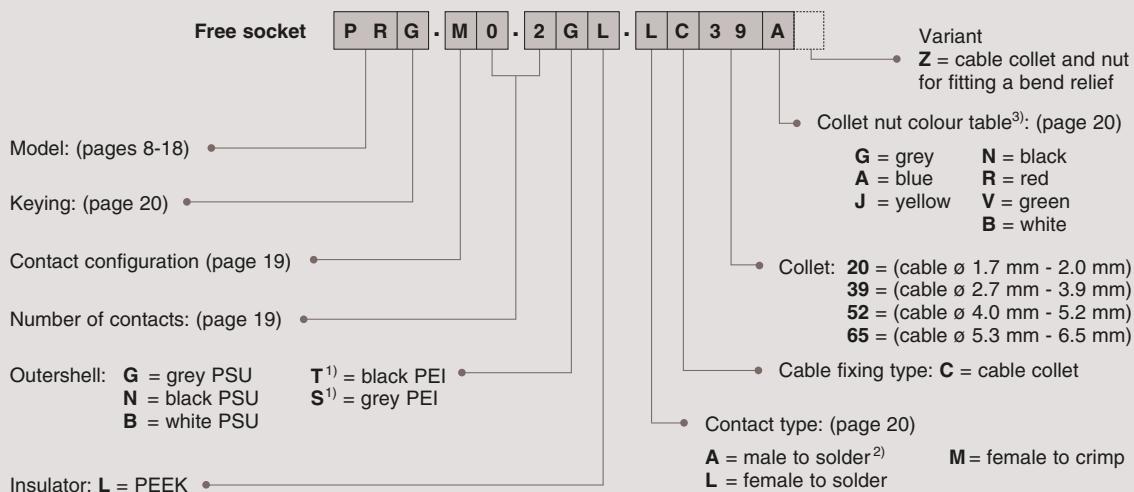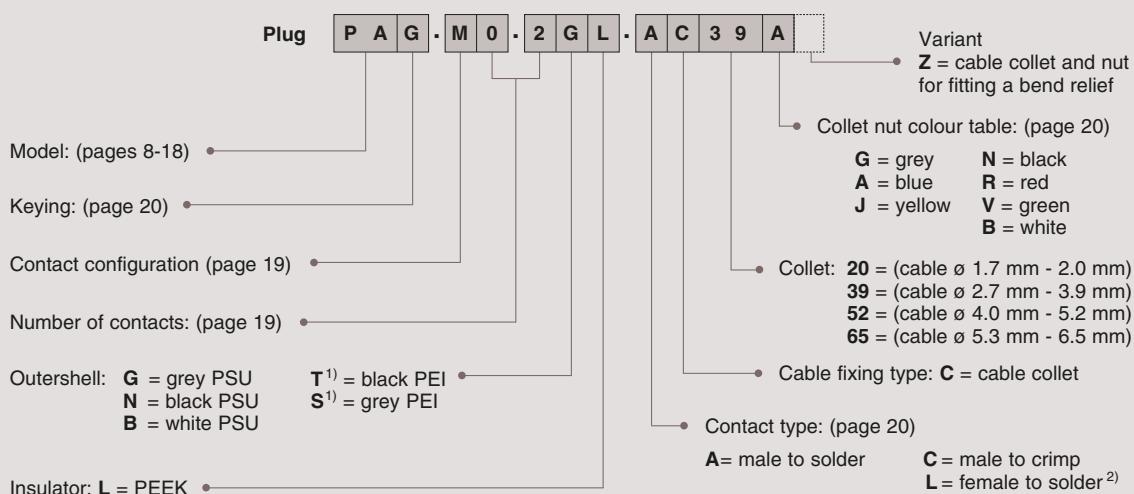

PAG.M0.2GL.AC39A Straight plug with cable collet and alignment key (G), multipole type with 2 male contacts to solder, grey PSU outershell, PEEK insulator, collet for a cable ø 2.7 to 3.9 mm and blue collet nut.

PRG.M0.2GL.LC39A Free socket with cable collet and alignment key (G), multipole with 2 female contacts to solder, grey PSU outershell, PEEK insulator, collet for a cable ø 2.7 to 3.9 mm and blue collet nut.

PKG.M0.2GL.LA Fixed socket with two nuts and alignment key (G), multipole type with 2 female contacts to solder, grey PSU outershell, PEEK insulator, and blue plastic front nut.

Note: 1) for extensive steam sterilization we recommend Polyetherimide ULTEM® (PEI).


2) contact available only with H and J keying and with 8, 10 or 14 contacts (inverted contacts).

3) collet nut and front nut colour table for PT• and PD• models.


► Standard models (IP50)


Fixed socket

- 1 Outershell
- 2 Insulator
- 3 Female contact
- 4 Hexagonal nut
- 5 Front nut


Straight plug

- 1 Outershell
- 2 Insulator
- 6 Latch sleeve
- 7 Male contact
- 8 Cable collet
- 9 Collet nut

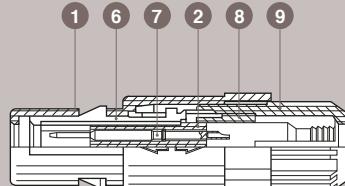


Characteristics	Value	Standards
Average retention force when pulling on the cable 1N = 0.102 kg	90 N	IEC 60512-8 test 15f
Cable retention force (depends on cable construction) 1N = 0.102 kg	50 - 150 N	IEC 60512-9 test 17c

Characteristics	Value	Standards
Endurance (latching)	> 5000 cycles	IEC 60512-5 test 9a
Working temperature range (PSU)	-50/+150°C	—
Working temperature range (PEI)	-50/+170°C	—

PAG Straight plug, key (G) or keys (A, B, C, H and J), with cable collet



Part Number	Cable ø	
	min	max
PAG.M●.●GL.AC20G	1.7	2.0
PAG.M●.●GL.AC39G	2.7	3.9
PAG.M●.●GL.AC52G	4.0	5.2
PAG.M●.●GL.AC65G	5.3	6.5

Note: replace ●● by contact configuration (see page 19).

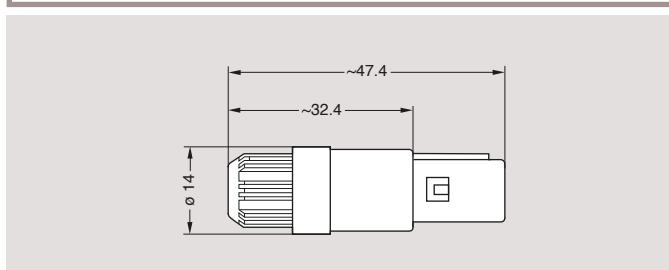

PAG Straight plug, key (G) or keys (A, B, C, H and J), with cable collet and nut for fitting a bend relief


Part Number	Cable ø	
	min	max
PAG.M●.●GL.AC20GZ	1.7	2.0
PAG.M●.●GL.AC39GZ	2.7	3.9
PAG.M●.●GL.AC52GZ	4.0	5.2
PAG.M●.●GL.AC65GZ	5.3	6.5

Note: replace ●● by contact configuration (see page 19).
The bend relief must be ordered separately (see page 22).

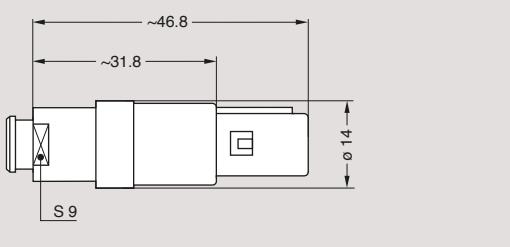


Note: all dimensions are in millimeters

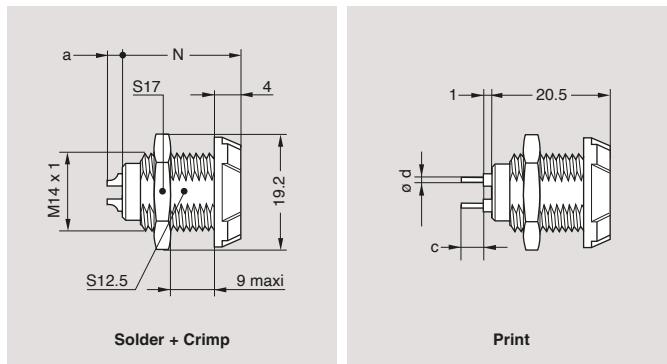PLG Fixed socket, key (G) or keys (A, B, C, H and J), nut fixing


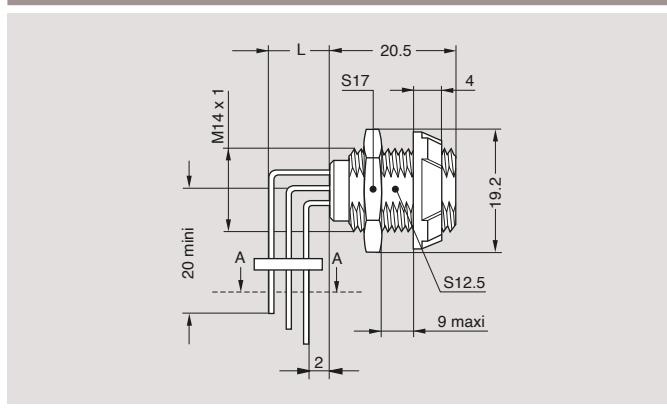
Part Number	number of contacts	Contact					
		Solder		Crimp		Print	
		N	a max	N	a	c	ø d
PLG.M0.2GL.LG	2	20.5	2.5	22.2	0	5	0.7
PLG.M0.4GL.LG	4	20.5	2.5	22.2	0	5	0.7
PLG.M0.5GL.LG	5	20.5	2.5	22.2	0	5	0.7
PLG.M0.6GL.LG	6	20.5	2.5	22.2	0	3	0.5
PLG.M0.7GL.LG	7	20.5	4.5	22.2	0	3	0.5
PLG.M0.8GL.LG	8	20.5	4.5	22.2	0	3	0.5
PLG.M0.9GL.LG	9	20.5	3.9	—	—	3	0.5
PLG.M1.0GL.LG	10	20.5	3.9	—	—	3	0.5
PLG.M1.4GL.LG	14	20.5	3.9	—	—	3	0.5

Note: for PCB drilling pattern and panel hole see page 24.

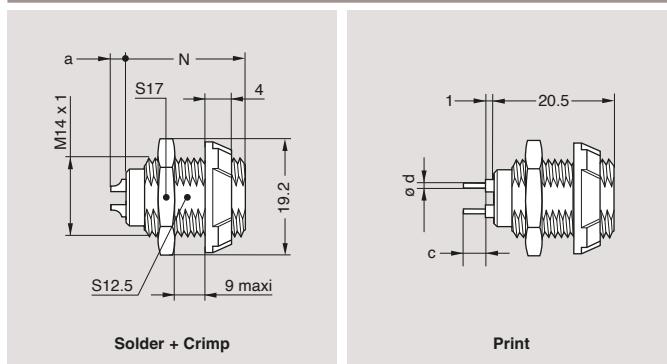PKG Fixed socket, key (G) or keys (A, B, C, H and J), with two nuts (back panel mounting)


Part Number	number of contacts	Contact					
		Solder		Crimp		Print	
		N	a max	N	a	c	ø d
PKG.M0.2GL.LG	2	20.5	2.5	22.2	0	5	0.7
PKG.M0.4GL.LG	4	20.5	2.5	22.2	0	5	0.7
PKG.M0.5GL.LG	5	20.5	2.5	22.2	0	5	0.7
PKG.M0.6GL.LG	6	20.5	2.5	22.2	0	3	0.5
PKG.M0.7GL.LG	7	20.5	4.5	22.2	0	3	0.5
PKG.M0.8GL.LG	8	20.5	4.5	22.2	0	3	0.5
PKG.M0.9GL.LG	9	20.5	3.9	—	—	3	0.5
PKG.M1.0GL.LG	10	20.5	3.9	—	—	3	0.5
PKG.M1.4GL.LG	14	20.5	3.9	—	—	3	0.5


Note: for PCB drilling pattern and panel hole see page 24.

PKG Fixed socket, key (G) or keys (A, B, C, H and J), with two nuts, with 90° contacts (back panel mounting)


Part Number	number of contacts	L
PKG.M0.2GL.VG	2	5.4
PKG.M0.4GL.VG	4	5.2
PKG.M0.5GL.VG	5	7.7
PKG.M0.6GL.VG	6	7.7
PKG.M0.7GL.VG	7	7.7
PKG.M0.8GL.VG	8	7.7
PKG.M0.9GL.VG	9	10.3
PKG.M1.0GL.VG	10	10.3
PKG.M1.4GL.VG	14	12.9


Note: for PCB drilling pattern see page 25.
Panel hole see page 24.

Note: all dimensions are in millimeters

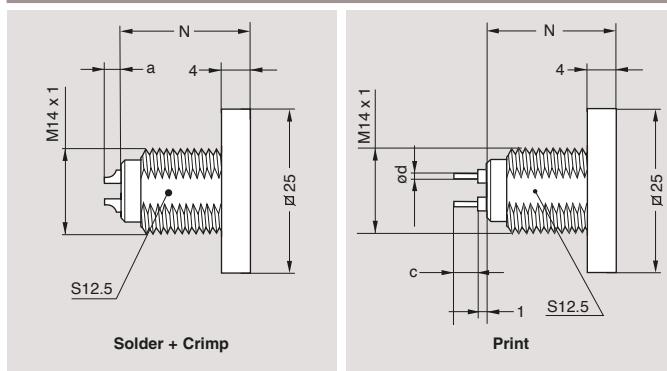PMG Fixed socket, key (G) or keys (A, B, C, H and J), with square flange


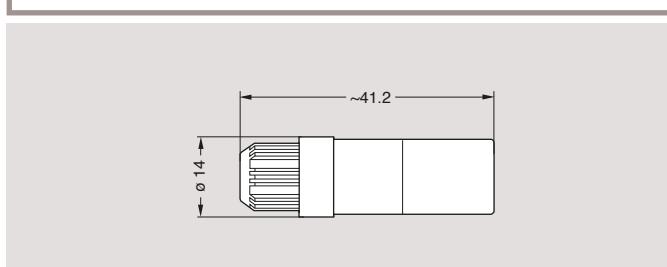
Part Number	number of contacts	Contact					
		Solder		Crimp		Print	
		N	a max	N	a	c	Ø d
PMG.M0.2GL.LG	2	20.5	2.5	22.2	0	5	0.7
PMG.M0.4GL.LG	4	20.5	2.5	22.2	0	5	0.7
PMG.M0.5GL.LG	5	20.5	2.5	22.2	0	5	0.7
PMG.M0.6GL.LG	6	20.5	2.5	22.2	0	3	0.5
PMG.M0.7GL.LG	7	20.5	4.5	22.2	0	3	0.5
PMG.M0.8GL.LG	8	20.5	4.5	22.2	0	3	0.5
PMG.M0.9GL.LG	9	20.5	3.9	—	—	3	0.5
PMG.M1.0GL.LG	10	20.5	3.9	—	—	3	0.5
PMG.M1.4GL.LG	14	20.5	3.9	—	—	3	0.5

Note: for PCB drilling pattern see page 24.
Panel hole see page 24.

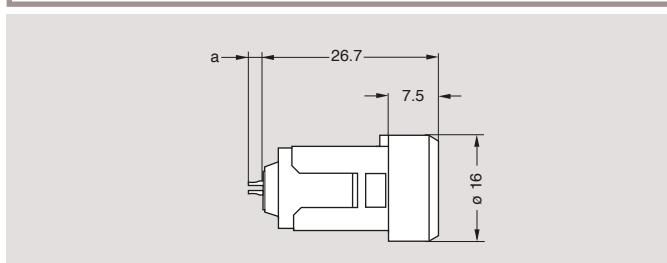PYG Fixed socket, key (G) or keys (A, B or H), snap-on fixing


Part Number	number of contacts	Solder	
		a	max
PYG.M0.2GL.LG	2	2.5	
PYG.M0.4GL.LG	4	2.5	
PYG.M0.5GL.LG	5	2.5	
PYG.M0.6GL.LG	6	2.5	
PYG.M0.7GL.LG	7	2.5	
PYG.M0.8GL.LG	8	2.5	
PYG.M0.9GL.LG	9	4.0	
PYG.M1.0GL.LG	10	4.0	
PYG.M1.4GL.LG	14	4.0	

Note: only with A, B or G keying (2 to 14 contacts) or H (8,10 or 14 contacts).
The insulator is made of PEEK.

PRG Free socket, key (G) or keys (A, B, C, H and J), with cable collet


Part Number	Cable Ø	
	min	max
PRG.M0.0GL.LC20G	1.7	2.0
PRG.M0.0GL.LC39G	2.7	3.9
PRG.M0.0GL.LC52G	4.0	5.2
PRG.M0.0GL.LC65G	5.3	6.5

Note: replace •• by contact configuration (see page 19).


Note: all dimensions are in millimeters

PRG Free socket, key (G) or keys (A, B, C, H and J), with cable collet and nut for fitting a bend relief



Part Number	Cable ø	
	min	max
PRG.M●.●GL.LC20GZ	1.7	2.0
PRG.M●.●GL.LC39GZ	2.7	3.9
PRG.M●.●GL.LC52GZ	4.0	5.2
PRG.M●.●GL.LC65GZ	5.3	6.5

Note: replace **••** by contact configuration (see page 19).
The bend relief must be ordered separately (see page 22).

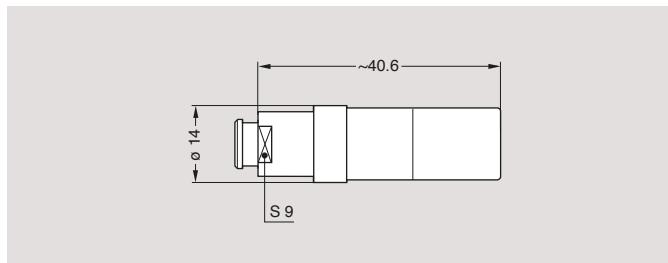


PTG Fixed socket, key (G) or keys (A, B, C, H and J), with two nuts and cable collet (back panel mounting)



Part Number	Cable ø	
	min	max
PTG.M•••GL.LC20G	1.7	2.0
PTG.M•••GL.LC39G	2.7	3.9
PTG.M•••GL.LC52G	4.0	5.2
PTG.M•••GL.LC65G	5.3	6.5

Note: replace •• by contact configuration (see page 19).
Panel hole see page 24.

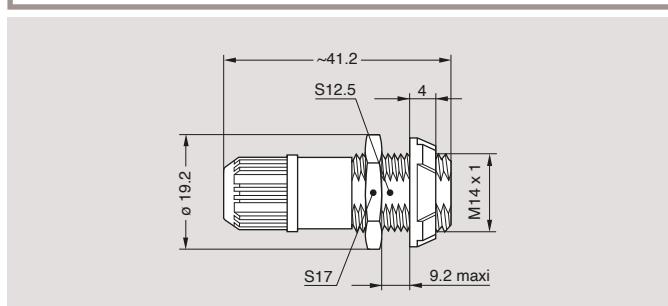


PDG Fixed socket, key (G) or keys (A, B, C, H and J), nut fixing and cable collector



Part Number	Cable ø	
	min	max
PDG.M.ø.GL.LC20G	1.7	2.0
PDG.M.ø.GL.LC39G	2.7	3.9
PDG.M.ø.GL.LC52G	4.0	5.2
PDG.M.ø.GL.LC65G	5.3	6.5

Note: replace •• by contact configuration (see page 19).
Panel hole see page 24

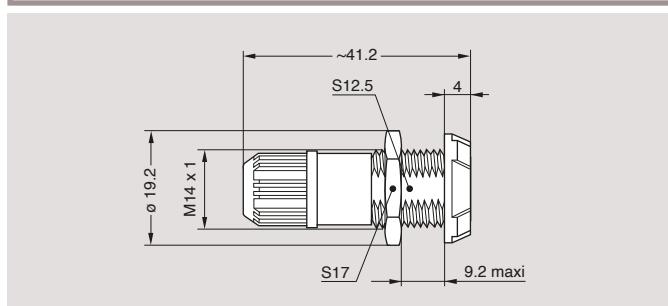


Note: all dimensions are in millimeters

► Elbow socket models (IP50)

P 

PPG Elbow socket, key (G) or keys (A, B, C), for printed circuit

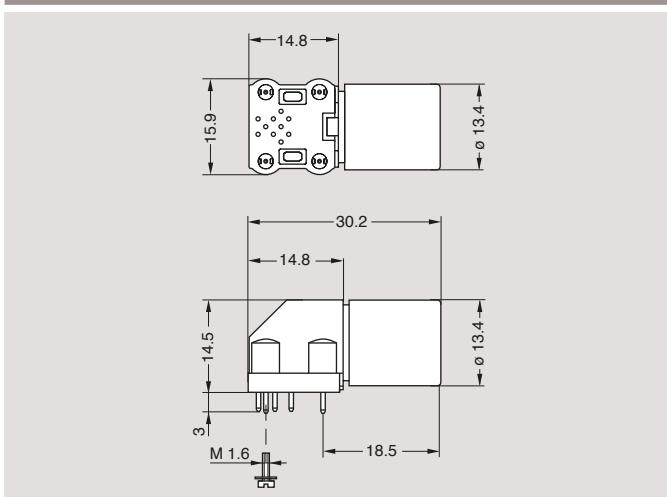


Part Number	number of contacts
PPG.M0.2GG.N	2
PPG.M0.4GG.N	4
PPG.M0.5GG.N	5
PPG.M0.6GG.N	6
PPG.M0.7GG.N	7
PPG.M0.8GG.N	8
PPG.M0.9GG.N	9
PPG.M1.0GG.N	10

Note: only available with G or A, B, C keying. The insulator is made of PSU. Outershell material is grey or black PSU.

For PCB drilling, see page 25.

It is possible to replace the 4 ground pins by 4 screws (M1.6) add an «S» to the end of the part number. (e.g.: PPG.M0.2GG.NS)

PXG Elbow socket, key (G) or keys (A, B, C), with two nuts, for printed circuit

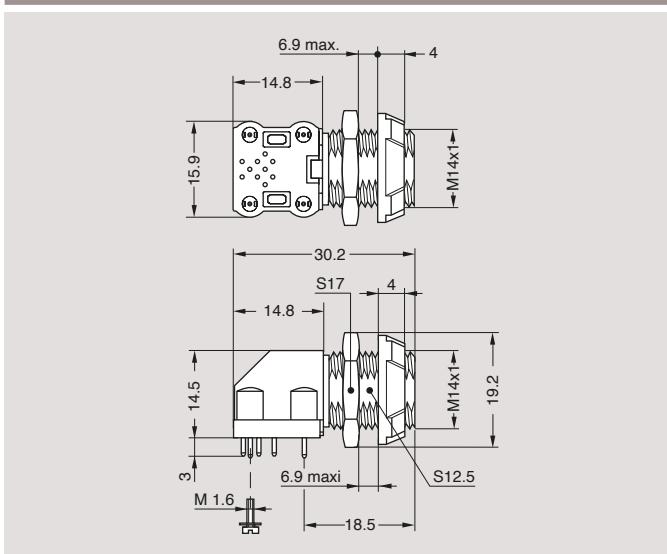

Part Number	number of contacts
PXG.M0.2GG.NG	2
PXG.M0.4GG.NG	4
PXG.M0.5GG.NG	5
PXG.M0.6GG.NG	6
PXG.M0.7GG.NG	7
PXG.M0.8GG.NG	8
PXG.M0.9GG.NG	9
PXG.M1.0GG.NG	10

Note: only available with G or A, B, C keying. The insulator is made of PSU. Outershell material is grey or black PSU.

For PCB drilling, see page 25.


Panel hole see page 24.

It is possible to replace the 4 ground pins by 4 screws (M1.6) add an «S» to the end of the part number. (e.g.: PXG.M0.2GG.NGS)

Note: all dimensions are in millimeters.
For outershell in black PSU replace material code by «N».

► Disposable plug (limited use)

P | J | M | . | . | A

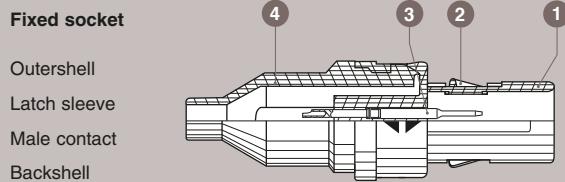

Characteristics	Value	Standards
Endurance for PJ (latching) ¹⁾	15 cycles min.	IEC 60512-5 test 9a
Working temperature range (ABS)	-30 / +90°C	—
Outershell / insulator material	PSU	—
Backshell material	ABS	—

Note: 1) with machined contacts

PJG Straight disposable plug



Figure 1

P | J | G | . | M | 1 | . | 0 | G | G | . | A | G

Keying:
A, B, C, G

Colour:
B = white
G = grey

Number of contacts:
7, 9, 10, 14

Figure 1

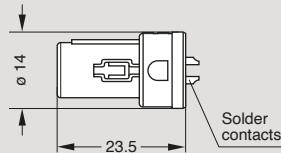


Figure 2

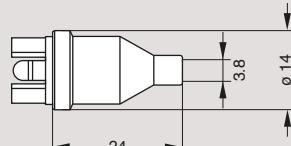


Figure 2

P | J | G | . | 1 | 3 | 8 | . | A | G

ø C (mm):
3.8 mm = 138

Colour:
B = white
G = grey

Material:
A = ABS

Note: 7 pin ø 0.7 mm male with ø 0.8 mm solder buckets.
9, 10 and 14 pin ø 0.5 mm male with ø 0.44 mm solder buckets.
Not intended for use with PN or PY sockets.

► Disposable socket (limited use)

P | Y | M | . | . | .



Characteristics	Value	Standards
Endurance for PY (latching)	< 100 cycles	IEC 60512-5 test 9a
Working temperature range (PSU)	-50/+150°C	—
Average latching force	6N	IEC 60512-7 test 13a
Average unmating force	7N	IEC 60512-7 test 13a
Average retention force	90N	IEC 60512-7 test 13a

PYG Fixed disposable socket, snap on fixing




Part Number

Part Number	nb. of cts.	Contact Type	Solder a max	Shell color	Recommended Mating straight plug part number
PYG.M0.4GG.LG	4	female	2.5	grey	PAG.M0.4GL.AC***
PYG.M0.4GG.LN	4	female	2.5	black	PAG.M0.4GL.AC***
PYH.M0.8GG.AA	8	male	2.5	blue	PAH.M0.8GL.LC***
PYH.M0.8GG.AB	8	male	2.5	white	PAH.M0.8GL.LC***
PYA.M1.0GG.LG	10	female	4.0	grey	PAA.M1.0GL.AC***
PYH.M1.0GG.AA	10	male	4.0	blue	PAH.M1.0GL.LC***

Note:

The outershell and the insulator are moulded out of the same material (PSU).
Protective backshell available (see page 22).
Part number last digit represents the colour.

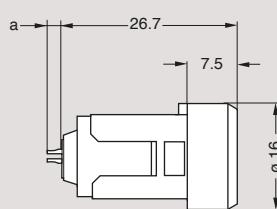


Note: all dimensions are in millimeters


Water-resistant models (IP64 when mated)


Fixed socket

- 1 Outershell
- 2 Insulator
- 3 Female contact
- 4 Hexagonal nut
- 5 Flat gasket
- 6 Gasket
- 7 Nut

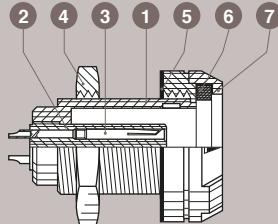
Straight plug

- 1 Outershell
- 2 Insulator
- 6 Gasket
- 7 Collet nut
- 8 Latch sleeve
- 9 Male contact
- 10 Cable collet

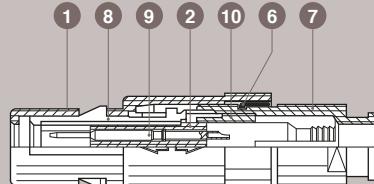


Characteristics	Value	Standards
Average retention force when pulling on the cable 1N = 0.102 kg	90 N	IEC 60512-8 test 15f
Cable retention force (depends on cable construction) 1N = 0.102 kg	50 - 150 N	IEC 60512-9 test 17c

Characteristics	Value	Standards
Endurance (latching)	> 5000 cycles	IEC 60512-5 test 9a
Working temperature range (PSU)	-50/+90°C	—
Gasket material	Elastomer SEBS	—

PFG Straight plug with cable collet and nut for fitting a bend relief


Part Number	Cable ø	
	min	max
PFG.M [•] .GL.AC20GZ	1.7	2.0
PFG.M [•] .GL.AC39GZ	2.7	3.9
PFG.M [•] .GL.AC52GZ	4.0	5.2
PFG.M [•] .GL.AC65GZ	5.3	6.5

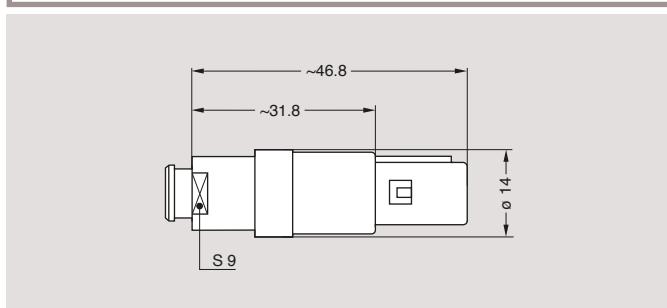


Note: the bend relief must be ordered separately (see page 22). Replace [•] by contact configuration (see page 19).


PNG Fixed socket, nut fixing


Part Number	number of contacts	Contact					
		Solder		Crimp		Print	
N	a max	N	a	c	ø d		
PNG.M0.2GL.LG	2	23.3	2.5	25.0	0	5	0.7
PNG.M0.4GL.LG	4	23.3	2.5	25.0	0	5	0.7
PNG.M0.5GL.LG	5	23.3	2.5	25.0	0	5	0.7
PNG.M0.6GL.LG	6	23.3	2.5	25.0	0	3	0.5
PNG.M0.7GL.LG	7	23.3	4.5	25.0	0	3	0.5
PNG.M0.8GL.LG	8	23.3	4.5	25.0	0	3	0.5
PNG.M0.9GL.LG	9	23.3	3.9	—	—	3	0.5
PNG.M1.0GL.LG	10	23.3	3.9	—	—	3	0.5
PNG.M1.4GL.LG	14	23.3	3.9	—	—	3	0.5

Note: for PCB drilling pattern see page 24.

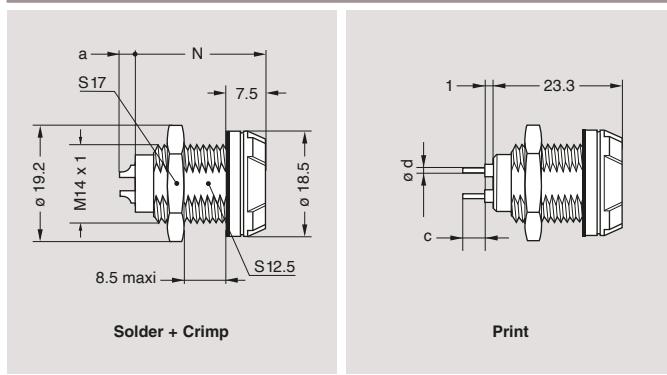

Note: all dimensions are in millimeters

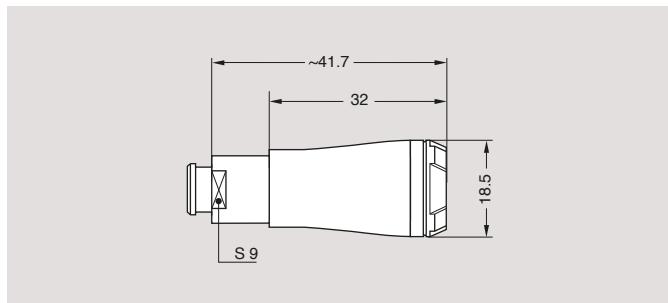PSG Free socket, conical outershell with cable collet and nut for fitting a bend relief

Part Number	Cable ø	
	min	max
PSG.M••YL.LC39AZ	2.7	3.9
PSG.M••YL.LC39GZ	2.7	3.9
PSG.M••YL.LC39RZ	2.7	3.9
PSG.M••YL.LC52GZ	4.0	5.2
PSG.M••YL.LC52NZ	4.0	5.2
PSG.M••YL.LC52RZ	4.0	5.2
PSG.M••YL.LC65AZ	5.3	6.5
PSG.M••YL.LC65NZ	5.3	6.5
PSG.M••YL.MC65NZ	5.3	6.5


Note: replace •• by contact configuration (see page 19).
Outershell in black Delrin®
The bend relief must be ordered separately (see page 22).

Note: all dimensions are in millimeters

► Fluidic configuration (2 bars)

P A 0 . 1 G Z .

The REDEL fluidic connector has many applications for example in medical or dentistry equipment. The connector is a monotube type and primarily intended for use with air or inert gas.

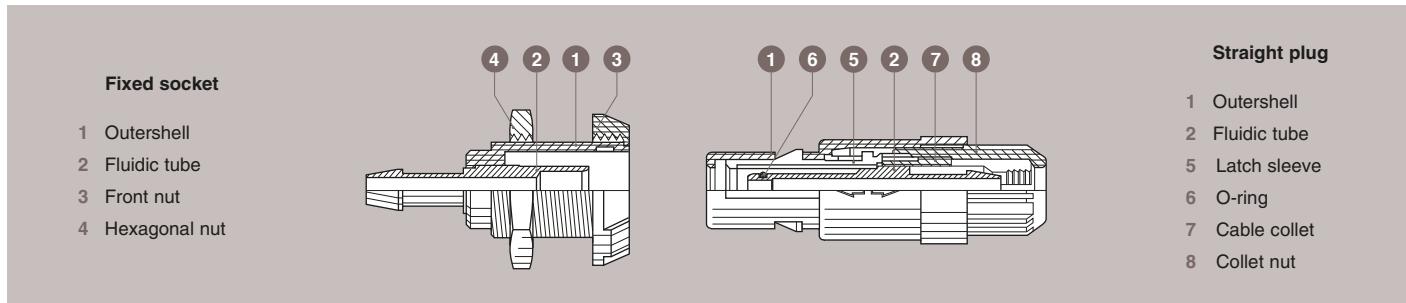

Characteristics	Value	Standards
Max. working pressure	2 bars	–
Endurance (latching)	> 5000 cycles	IEC 60512-5 test 9a
Working temperature range (PSU)	-20/+150°C	–


Characteristics	Value	Standards
Inner fluidic contact diameter	2.6 mm	–
Tube diameter inner/outer	4 mm / 6 mm	–
Fluidic tube material	Ni plated brass	–
O-ring material	FPM (Viton®)	–

PAG Straight plug, key (G) or keys (A, B, C, H and J), with cable collet



Part Number	ø max. tube (mm)	ø inner tube (mm)
PAG.A0.1GZ.ZC65G	6.5	4

Note: For collet nut colour replace last digit (see table page 20).

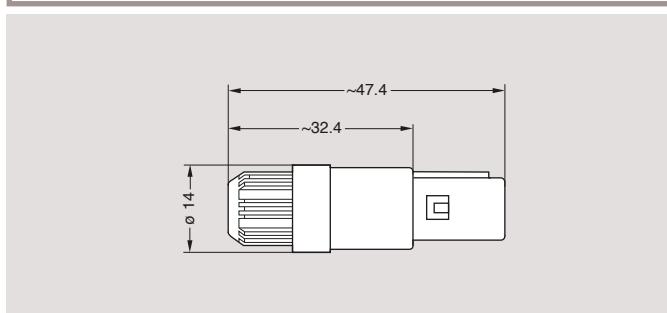


PAG Straight plug, key (G) or keys (A, B, C, H and J), with cable collet and nut for fitting a bend relief



Part Number	ø max. tube (mm)	ø inner tube (mm)
PAG.A0.1GZ.ZC65GZ	6.5	4

The bend relief must be ordered separately (see page 22).

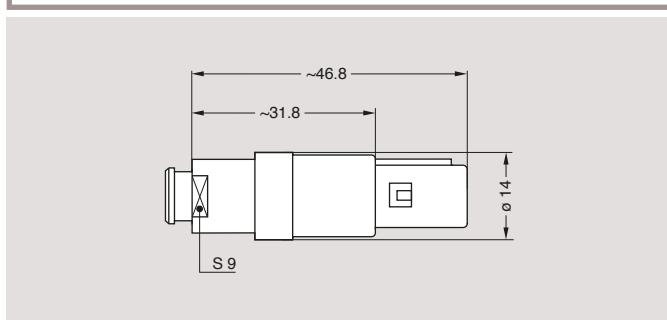


Note: all dimensions are in millimeters

PLG Fixed socket, key (G) or keys (A, B, C, H and J), with fluidic contact, nut fixing


Part Number	ø inner tube (mm)
PLG.A0.1GZ.ZG	4

Note: For front nut colour replace last digit (see table page 20).
Recommended tube Legris 102540601

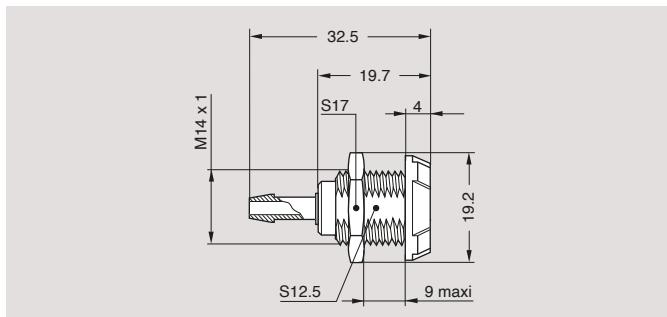**PKG** Fixed socket, key (G) or keys (A, B, C, H and J), with fluidic contact, with two nuts (back panel mounting)

Part Number	ø inner tube (mm)
PKG.A0.1GZ.ZG	4

Note: For front nut colour replace last digit (see table page 20).
Recommended tube Legris 102540601

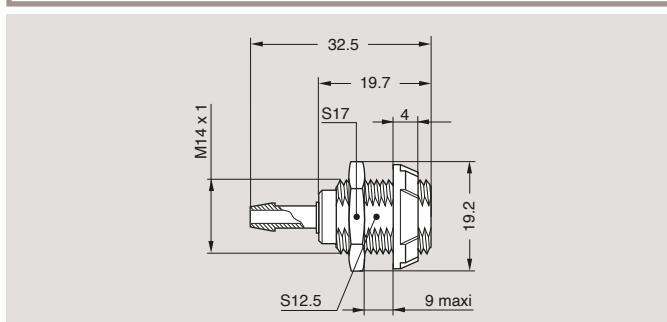


Note: all dimensions are in millimeters

Mains power configuration

P | . | . | . | . | . | . | .

The new mains power PA● and PK● models are qualified for applications requiring IEC 60601-1 (3rd Ed.) medical safety standard. The design of a special insulator offers the required creepage distance. The 3 contacts are only solder type with a maximum AWG 18 (wire size max 1.35 mm). The connectors are UL certified to be used at 250 Volt AC (9 Amps). See UL approval file number N°E242949 (only valid for 3 contact configuration).

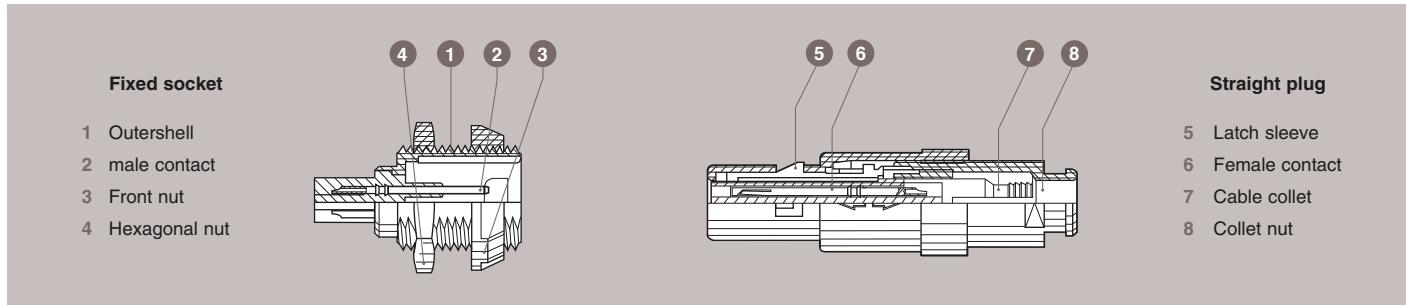

Characteristics	Value	Standards
Test voltage (rms)	3.4 kV	IEC 60512-2 test 4a
Rated voltage (rms)	250 V	IEC 60601 (3 rd Ed.) UL 60601-1
Average retention force when pulling on the cable 1N = 0.102 kg	90 N	IEC 60512-8 test 15f


Characteristics	Value	Standards
Cable retention force (depends on cable construction) 1N = 0.102 kg	50 – 150 N	IEC 60512-9 test 17c
Endurance (latching)	> 5000 cycles	IEC 60512-5 test 9a
Working temperature range (PSU)	-50/+150°C	–
UL file number	E242949	–

PA● Straight plug, key (H or G), with cable collet and nut for fitting a bend relief



Part Number	Cable ø	
	min	max
PAH.N0.3GL.LC52GZ	4.0	5.2
PAH.N0.3GL.LC65GZ	5.3	6.5
PAG.N0.4GL.AC52GZ	4.0	5.2
PAG.N0.4GL.AC65GZ	5.3	6.5

Note: The bend relief must be ordered separately (see page 22).

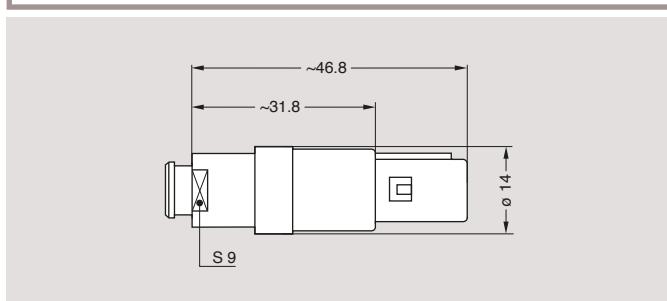


PK● Fixed socket, key (H or G), with two nuts (back panel mounting)



Part Number
PKH.N0.3GL.AG
PKG.N0.4GL.LG

Note: For front nut colour replace last digit (see table page 20).
Not available with print contact.


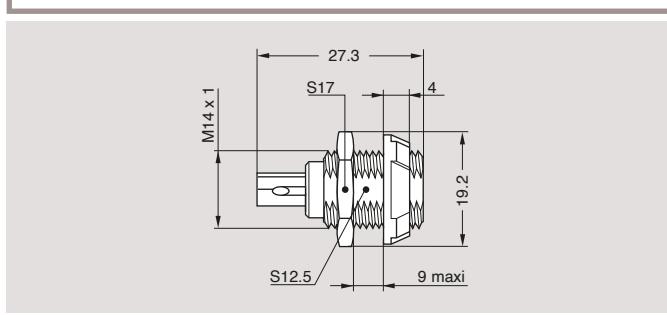


Note: all dimensions are in millimeters

▶ Insert configuration

P         

Multipole, Main power, Fluidic

Multipole	Male solder contact	Female solder contacts	Reference	Number of contacts	Contact \varnothing (mm)	Solder bucket \varnothing (mm) ⁵⁾	Crimp bucket \varnothing (mm) ⁵⁾	Contact type			Test voltage (kV DC) ¹⁾ Contact-contact	Air clearance min ²⁾ (mm)	Creepage distance min ³⁾ (mm)	Rated current (A)
								Solder	Crimp	Print (straight)				
Multipole	 	 	M0.2	2	1.3	1.10	1.4	•	•	•	•	1.70	1.30	10.0
			M0.4	4	0.9	0.80	1.1	•	•	•	•	1.70	1.20	8.0
			M0.5	5	0.9	0.80	1.1	•	•	•	•	1.48	0.80	7.0
			M0.6	6	0.7	0.60	0.8	•	•	•	•	1.48	0.85	6.0
			M0.7	7	0.7	0.60	0.8	•	•	•	•	1.48	0.85	5.0
			M0.8	8	0.7	0.60	0.8	•	•	•	•	1.48	0.60	5.0
			M0.9	9	0.5	0.45	—	•	—	•	•	1.20	0.60	3.0
			M1.0	10	0.5	0.45	—	•	—	•	•	1.20	0.55	3.0 ⁴⁾
			M1.2	12	0.5	0.45	—	•	—	•	•	0.75	0.50	2.5
			M1.4	14	0.5	0.45	—	•	—	•	•	0.85	0.50	2.0
Mains power			N0.3	3	0.9	1.40	—	•	—	—	—	4.81 (1.50 ⁶⁾	2.00	9.0
			N0.4	4	0.9	1.40	—	•	—	—	—	3.50	1.30	8.0
Fluidic			A0.1	1 Fluidic (monotube) up to 2 bars										

Note: 1) depending on specific application and related standard, more restrictive operating voltage may apply, see page 68.

2) shortest distance in air between two conductive parts.

3) shortest distance along the surface of the insulating material between two conductive parts.

4) for PPG and PXG (with 10 contacts) electrical characteristics, please contact factory.

5) for a given AWG, the diameter of some stranded conductor design is larger than the solder cup diameter (see page 69).

6) 1.5 kV according to UL file number: E242949.

► Alignment key



Verify the third digit of the part number in order to select the right keying.
The standard keying is «G» coded.

Keying (plug front view)	Standard gender				Reverse gender	
	0	40°	60°	80°	170°	205°
Reference	G	A	B	C	H	J
Contact type for plug	male	male	male	male	female	female
Contact type for socket	female	female	female	female	male	male
Number of contacts	2 to 14			8, 10 or 14		

► Outer shell material



Material	Ref	Colour	Temperature
PSU	G	Grey	-50° / +150°C
	N	Black	
	B	White	

Material	Ref	Colour	Temperature
PEI	S	Grey	-50° / +170°C
	T	Black	

Note: for extensive sterilization use PEI.
For complete connector in PEI (collet nut, front nut or flange also in PEI), available colours are grey or black only. Use colour coding grey or black according to colour coding table (see below).

► Contact type



Select the type of contact: solder or crimp?

Plug	Type	Male	Female
	solder	A	L ¹⁾
crimp	C	-	

Socket	Type	Male	Female
	solder	A ¹⁾	L
	crimp	-	M
	print	D	N
	print 90°	V	V

Note: 1) only for H and J keying with 8, 10 or 14 contacts

When should I use crimp rather than solder contacts ?

Soldering

- recommended for small volumes
- requires little amount of tooling (soldering iron)
- requires more time

Crimping

- recommended for large volumes
- no heat is required to make the connection
- for contacts with high density
- for use in high temperature environment
- requires extra tooling (crimping tools)

► Colour coding



Easy identification with the assistance of colour coding.

Reference	Colours						
	grey	blue	yellow	black	red	green	white
G	A	J	N	R	V	B	
7001	5002	1016	9005	3020	6024	9003	

Note:

PSU outer shells are available in grey, black and white while PEI outer shells are only available in grey and black.
The RAL colours are indicative and depend on raw material and production process. Colour may differ.

► Accessories

PAG-PLG Insulator for crimp contacts



Contact configuration	Insulator part number	
	For male contact	For female contact
M0.2	PAG.302.YL	PLG.402.YL
M0.4	PAG.304.YL	PLG.404.YL
M0.5	PAG.305.YL	PLG.405.YL
M0.6	PAG.306.YL	PLG.406.YL
M0.7	PAG.307.YL	PLG.407.YL
M0.8	PAG.308.YL	PLG.408.YL


PAG-PKG Crimp contacts, kit with the number of contacts in a tube



Contact configuration	nb. of contacts	ø contact (mm)	Kit contact part number	
			Male	Female
M0.2	2	1.3	PAG.567.02C	PKG.667.02M
M0.4	4	0.9	PAG.562.04C	PKG.662.04M
M0.5	5	0.9	PAG.562.05C	PKG.662.05M
M0.6	6	0.7	PAG.557.06C	PKG.657.06M
M0.7	7	0.7	PAG.557.07C	PKG.657.07M
M0.8	8	0.7	PAG.557.08C	PKG.657.08M

Note: upon request, contacts with reduced crimp barrel are available.


PLA Collet

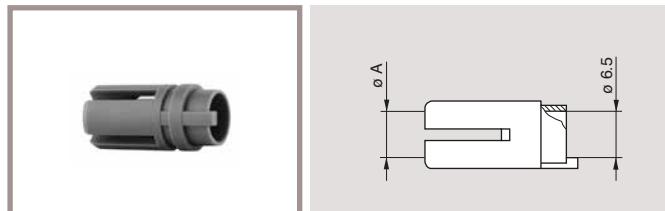

Part Number	ø A (mm)	Cable ø (mm)	
		min.	max.
PLA.720.**	2.0	1.7	2.0
PLA.739.**	3.9	2.7	3.9
PLA.752.**	5.2	4.0	5.2
PLA.765.**	6.5	5.3	6.5


Note: ** = UG (grey PSU), TN (black PEI) or UN (black PSU).

PKG Plastic front nut for PK● and PT● models

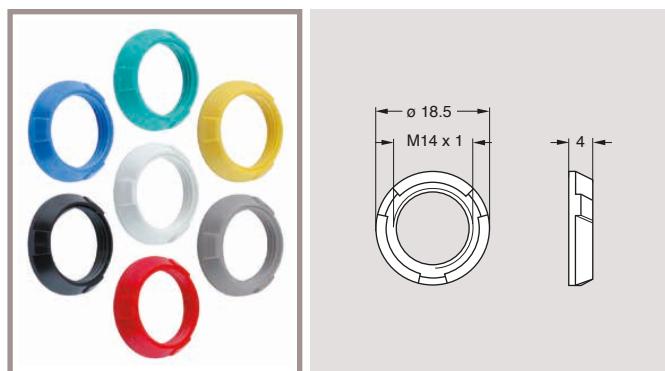

Part Number	Mat.	Colours
PKG.220.UA	PSU	blue
PKG.220.UB	PSU	white
PKG.220.UG	PSU	grey
PKG.220.UJ	PSU	yellow
PKG.220.UN	PSU	black
PKG.220.UR	PSU	red
PKG.220.UV	PSU	green
PKG.220.TG	PEI	grey
PKG.220.TN	PEI	black


PAM.130.●● Nut for fitting a GMA.1B bend relief

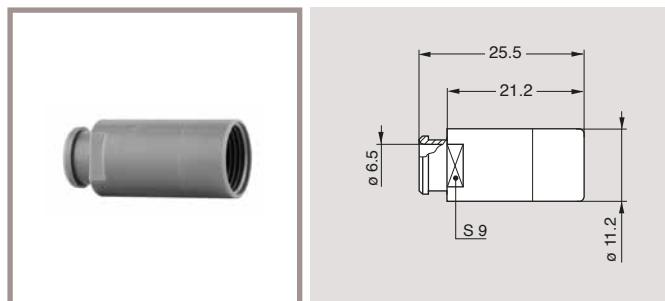





Note: all dimensions are in millimeters

Part Number	Mat.	Colours
PAM.130.UA	PSU	blue
PAM.130.UB	PSU	white
PAM.130.UG	PSU	grey
PAM.130.UJ	PSU	yellow
PAM.130.UN	PSU	black
PAM.130.UR	PSU	red
PAM.130.UV	PSU	green
PAM.130.TN	PEI	black
PAM.130.TG	PEI	grey

Note: only for PA●, PR● or PT● models.

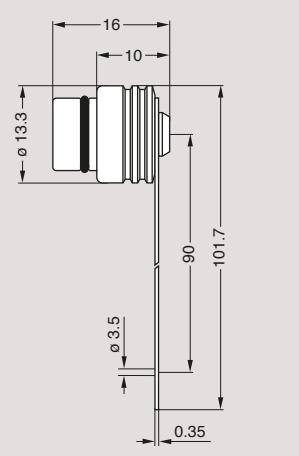
PBG.200.BMV Blanking cap for REDEL P


With PNG socket model it offers IP64. Material: Delrin®, colours: black

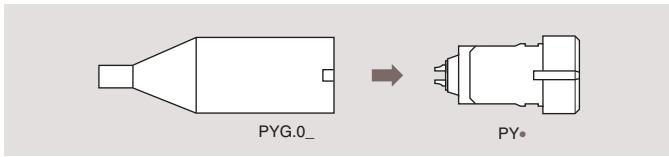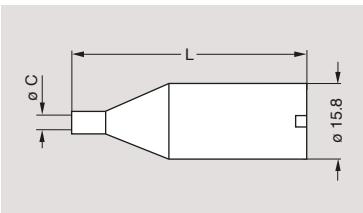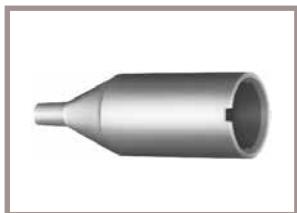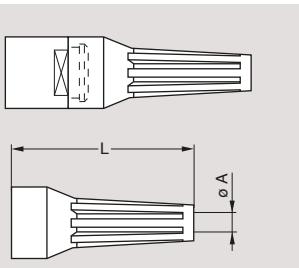PYG.0 Protective backshell for PY●

GMA.1B Bend relief


Part Number	Dimensions (mm)				Material	Temperature range				
	Bend relief		Cable Ø			in dry atmosphere				
	A	L	max.	min.						
GMA.1B.025.DG	2.5	30	2.9	2.5	TPU (Thermoplastic Polyurethane)	-40°C, +80°C	-			
GMA.1B.030.DG	3.0	30	3.4	3.0						
GMA.1B.035.DG	3.5	30	3.9	3.5						
GMA.1B.040.DG	4.0	30	4.4	4.0						
GMA.1B.045.DG	4.5	30	4.9	4.5						
GMA.1B.054.DG	5.4	30	6.0	5.4						
GMA.1B.065.DG 1)	6.5	30	7.0	6.5						
GMA.1B.025.RG	2.5	34	2.9	2.5	Silicone elastomer VMQ	-60°C, +200°C	+140°C			
GMA.1B.030.RG	3.0	34	3.4	3.0						
GMA.1B.035.RG	3.5	34	3.9	3.5						
GMA.1B.040.RG	4.0	34	4.4	4.0						
GMA.1B.045.RG	4.5	34	5.0	4.5						
GMA.1B.051.RG	5.1	34	5.6	5.1						
GMA.1B.057.RG	5.7	34	6.2	5.7						
GMA.1B.063.RG	6.3	34	7.0	6.3						

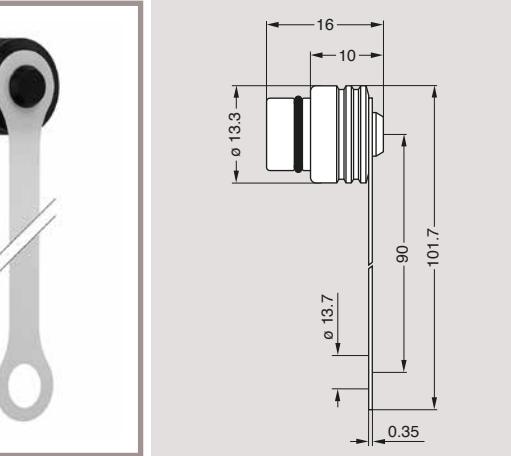Note: 1) Design may differ from other bend relief, model without stripes. The last letter «G» of the part number indicates a grey colour, see the adjacent table and replace letter «G» by the letter of the colour required. All dimensions are in millimeters

PBG.201.BMV Blanking cap for REDEL P


Additional gasket: PNG.902.SC (inner diameter 14 mm)

P Y G . 0 2 . 7 Y G . 0 P S U

Ø C (mm):
2.5 mm = 02.5
2.7 mm = 02.7
3.8 mm = 03.8

Color:
A = Blue
B = White
G = Grey
J = Yellow
N = Black
R = Red
V = Green

Material:
ABS
PSU

Length:
0 = 47 mm
1 = 67.1 mm

Note: Length 47 mm can be delivered in 3 different diameters 2.5/2.7/3.8 mm. Length 67 mm can be delivered in 2 different diameters 2.5 and 2.7 mm.

A bend relief absorbs the force that may be exerted on cables.


These are designed for plugs and free sockets with cable collet and nut.

Reference	Colours
A	blue
B	white
G	grey
J	yellow
M	brown
N	black
R	red
S	orange
V	green

Note: the selection of pigments, which should remain stable at high temperature, is limited by the new regulations. For this reason, some colours will be a shade different from those used for TPU bend reliefs. The selected solutions represent the best possible compromise.

► Tooling

POP.125.GN Spanner for outershell

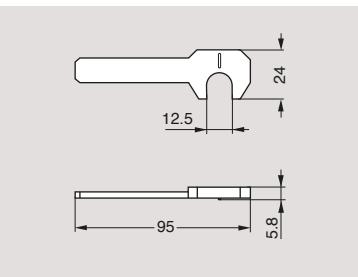


both spanners available as a kit, ref. POZ.12.18G.N.

Material: PA 6.6


POB.186.GN Spanner for front nut



Material: PA 6.6

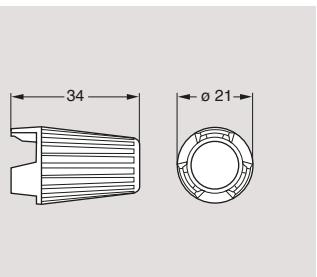


DPC.91.701.V Crimping tool

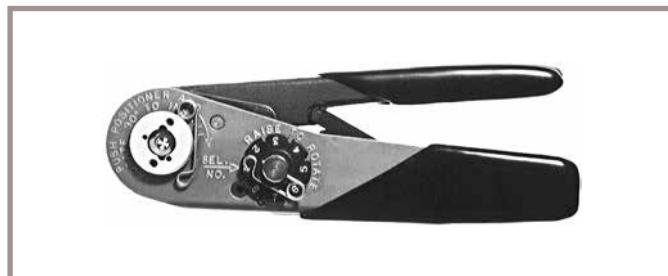

DCE Positioners for crimp contacts



DCC Manual extractor for crimp contacts

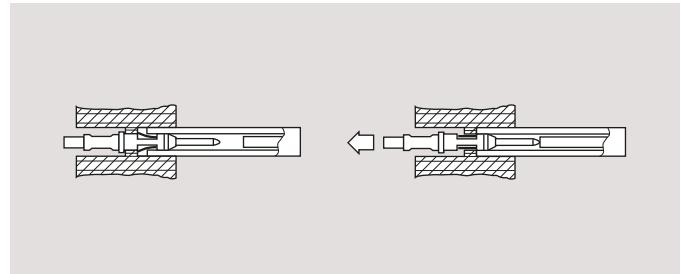


Configuration	Contact ø (mm)	Conductor AWG	Positioner part number		Selector No Setting	Part number extractor
			Male contact	Female contact		
M0.2	1.3	18-20	DCE.91.135.BVD	DCE.91.130.BVM	8-7	DCC.13.15B.LAG
M0.4/M0.5	0.9	20-22-24	DCE.91.095.BVD	DCE.91.090.BVM	6-5-5	DCC.09.05B.LAG
M0.6/M0.7/M0.8	0.7	22-24-26	DCE.91.075.BVD	DCE.91.070.BVM	6-5-5	DCC.07.04B.LAG


the variance in conductor stranding diameter for the minimum AWG is such that some can have a cross section which is not sufficient to guarantee crimping as per IEC 60352-2 standard. All dimensions are in millimeters.

► Panel hole

For PL●, PK●, PN●, PX●, PT● and PD●

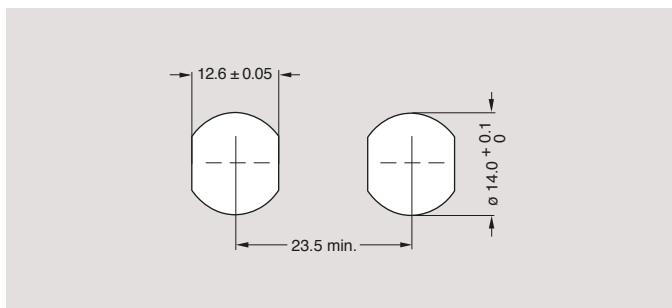

For PM●

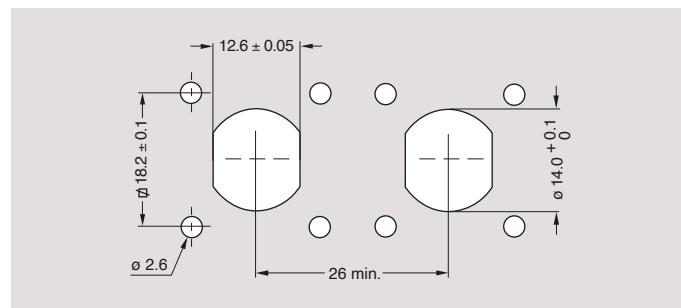


Note: PY● is also designed for snap-on fixing into customer housing. Consult factory for information.

– Socket mounting nut torque = 1.5 Nm.


► PCB drilling pattern

For straight contacts

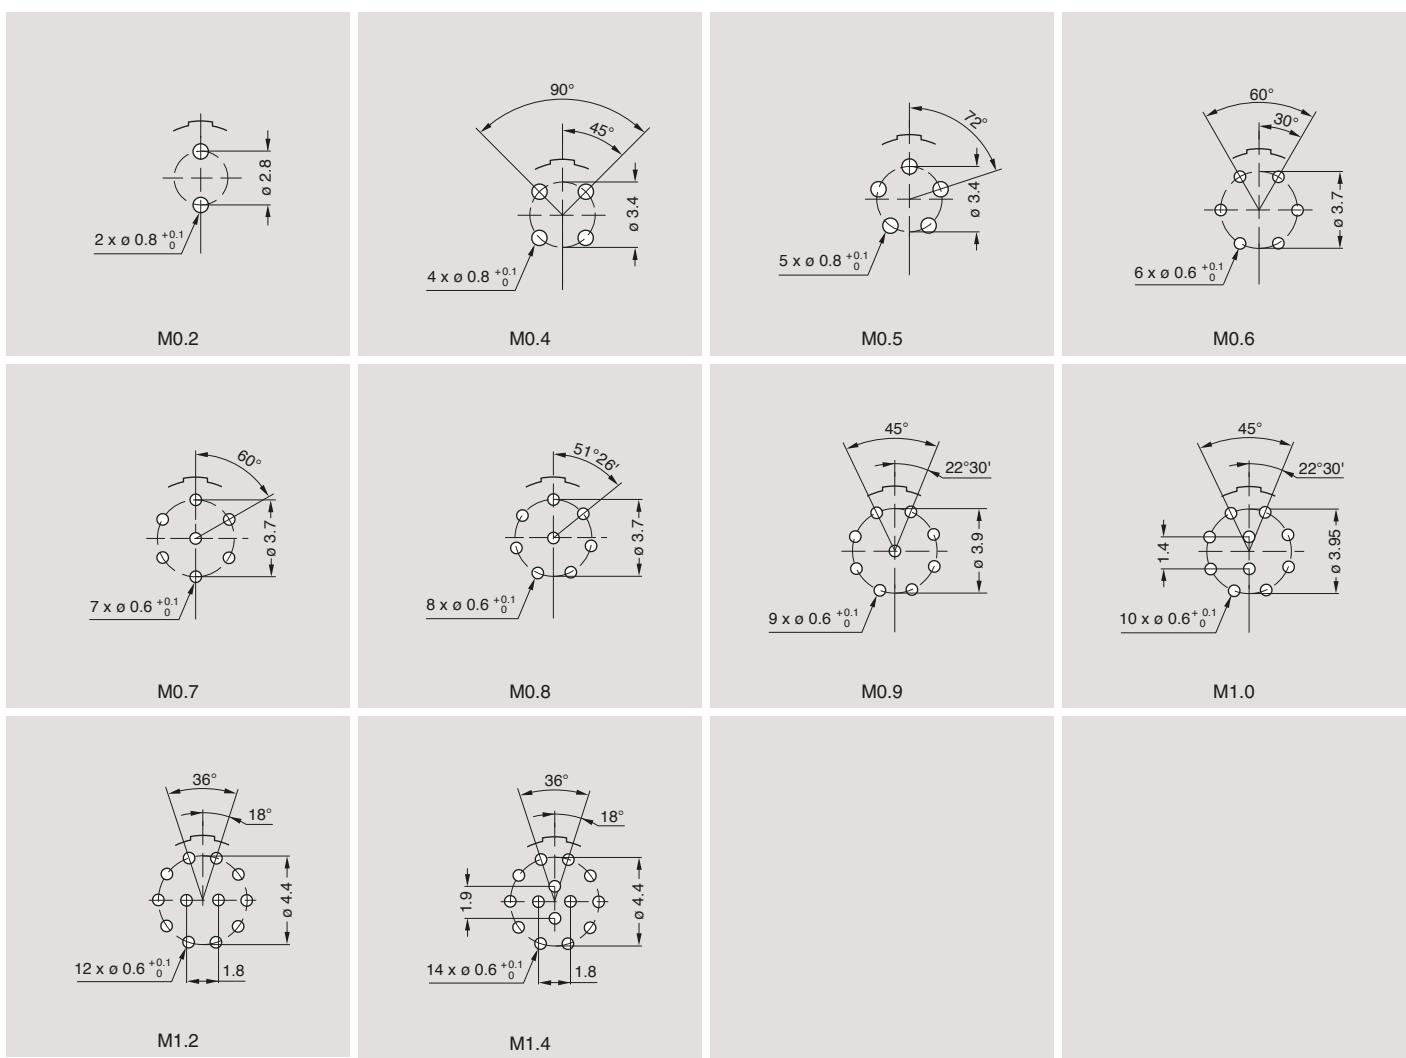


Note: all dimensions are in millimeters

For 90° elbow contacts (A-A view)


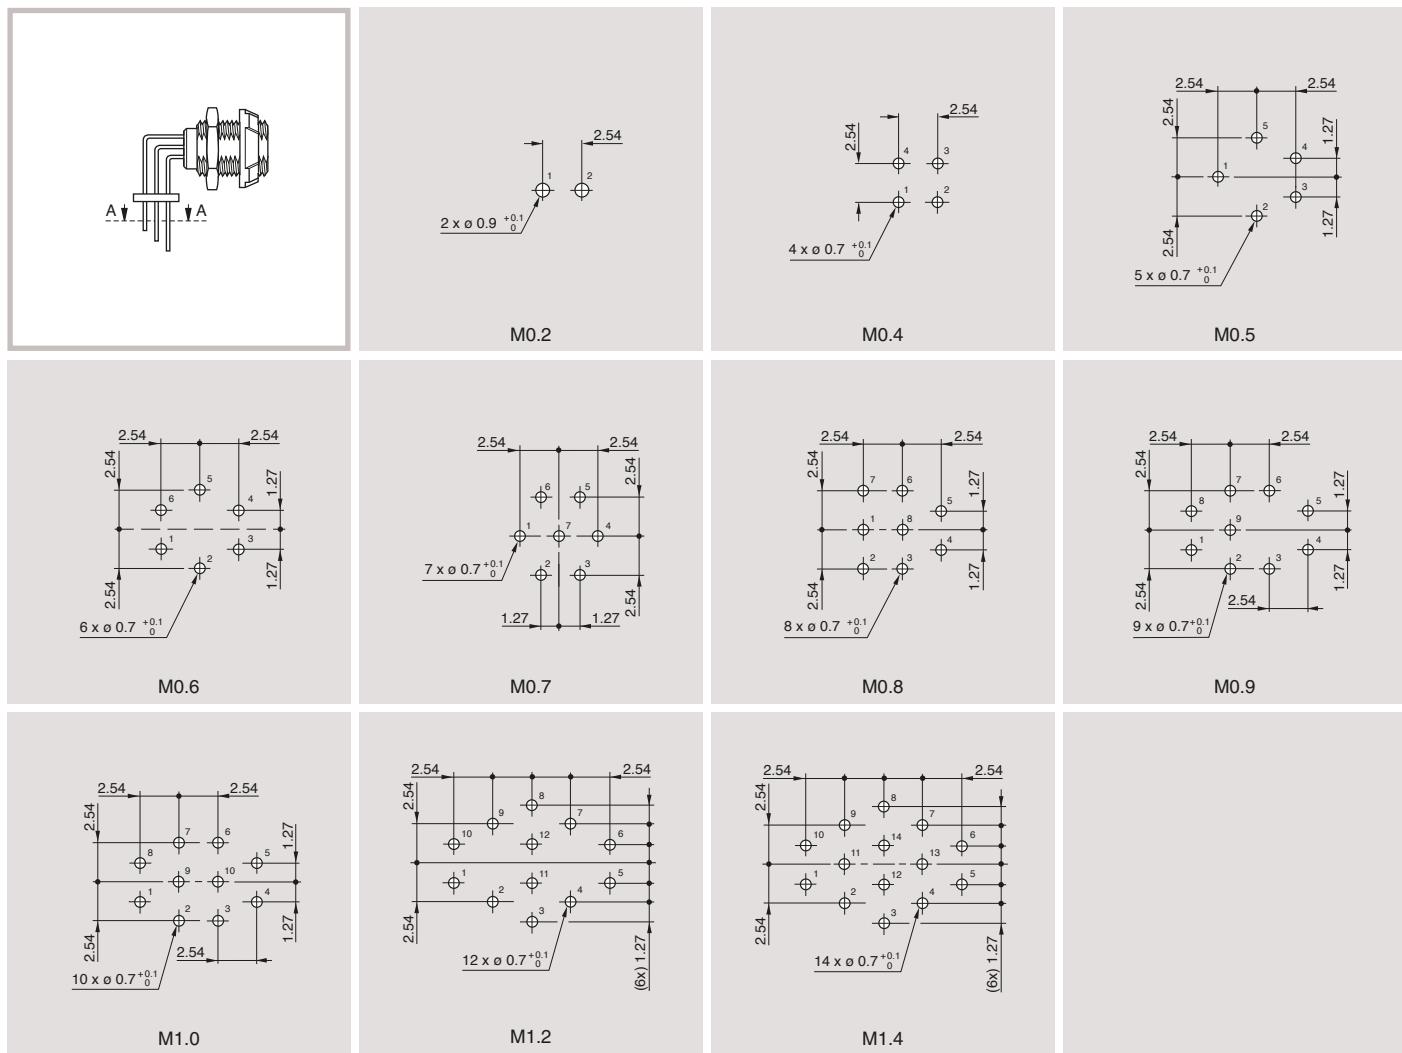


For PPG and PXG models

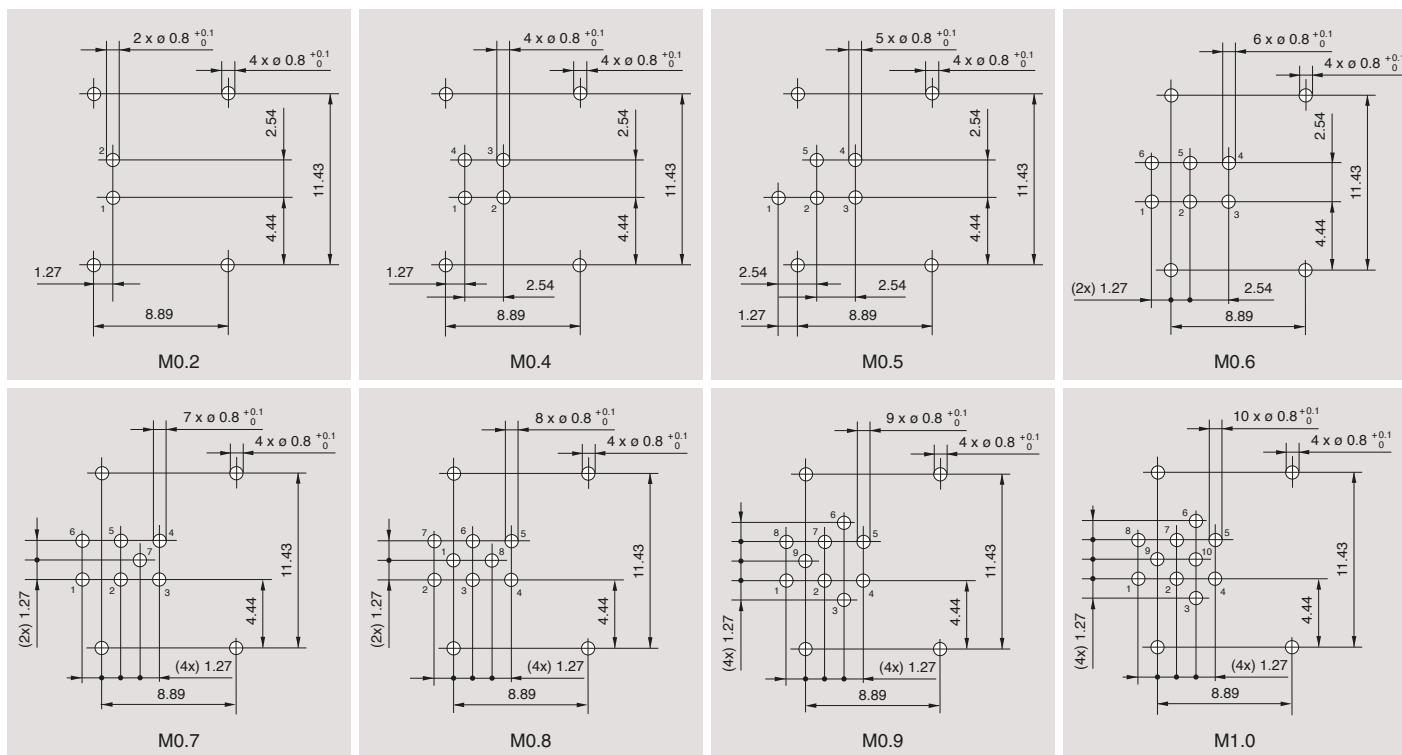

► Assembly instructions


Solder contacts

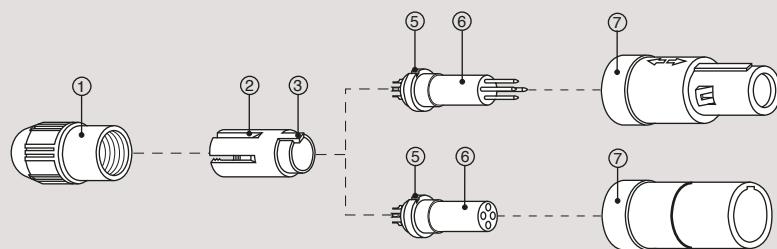


1. Strip the cable according to the lengths given in the table.
Tin the conductors.

Configuration	Dimensions (mm)	
	L	T
M0.2	14.0	4.0
M0.4, M0.5	13.0	3.0
M0.6 to M1.4	12.5	2.5
N0.3	11.5	3.5
N0.4	11.5	3.5

2. Slide the collet nut ① and then the collet ② onto the cable.





3. Solder conductors into contacts, making sure that neither solder nor flux gets onto the insulator or cable insulation.

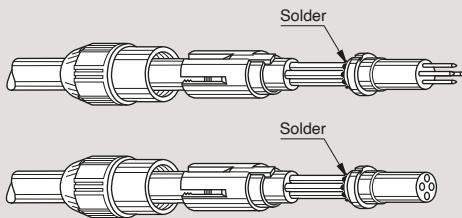

4. Slide the collet ② forward and locate tag ③ in the slot ⑤ on the insulator ⑥.

Slide collet nut ① over collet ② and then push the whole assembly into the shell ⑦ whilst turning it to ensure that the tag ③ locates in the inside slot of the shell. Tighten the collet nut ① to the maximum torque of 0.25 Nm.


– Socket mounting nut torque = 1.5 Nm.

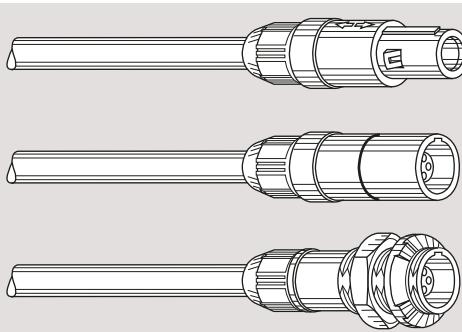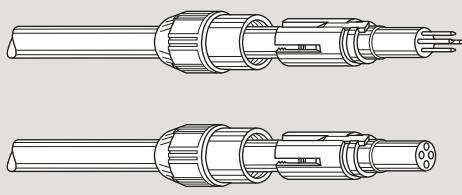


For PSU only:

We recommend the use of Vibra-tite VC-6, Araldite CW2243 + Aradur HY 2966, Ablestik FDA2 Trapax or ThreeBond 1401 to secure the connector collet nut. The use of other materials could result in damage to the connector. The only recommended chemical cleaner is Isopropyl Alcohol.


Crimp contacts

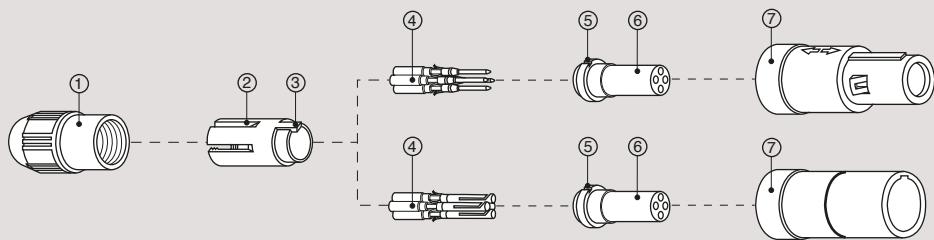


1. Strip the cable according to the lengths given in the table.



Configuration	Dimensions (mm)	
	L	T
M0.2 to M0.8	15.0	3.9





2. Slide the collet nut ① and then the collet ② onto the cable.

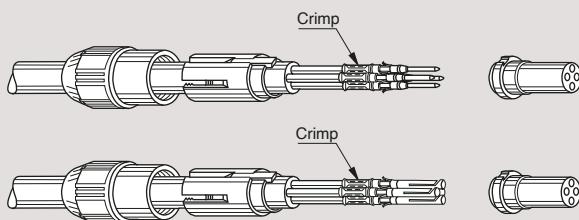

3. Fix the appropriate positioner (table page 23) in the crimping tool. Set selector to the number corresponding to the conductor AWG as indicated on the positioner label.

Fit conductor into contact ④ and make sure it is visible through the inspection hole in the crimp barrel. Slide conductor-contact combination into the open crimping tool; make sure that the contact is fully pushed into the positioner. Close the tool. Remove from crimping tool and check that conductor is secure in contact and shows in inspection hole.




4. Now arrange contact-conductor combinations according to the insert marking and locate them into the insert ⑥. Check that all contacts are correctly located and remain in position when given a gentle pull.




5. Slide the collet ② forward and locate tag ③ in the slot ⑤ on the insulator ⑥. Slide collet nut ① over collet ② and then push the whole assembly into the shell ⑦ whilst turning it to ensure that the tag ③ locates in the inside slot of the shell. Tighten the collet nut ① to the maximum torque of 0.25 Nm.

– Socket mounting nut torque = 1.5 Nm.




For PSU only:

We recommend the use of Vibra-tite VC-6, Araldite CW2243 + Aradur HY 2966, Ablestik FDA2 Trapax or ThreeBond 1401 to secure the connector collet nut. The use of other materials could result in damage to the connector. The only recommended chemical cleaner is Isopropyl Alcohol.

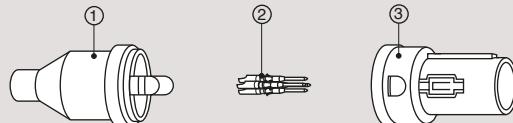Solder contacts (For PJ●)


1. Strip the cable according to the lengths given in the drawing. Tin the conductors.


Configuration	Dimensions (mm)	
	L	T
M0.9, M1.0, M1.4	15.0	3.0



2. Slide the backshell ① onto the cable



3. Solder conductors into contacts ②, making sure that neither solder nor flux gets onto the cable insulation.



4. Slide backshell ① forward and align the tabs to the slots on the plug ③. Snap backshell onto the plug to complete the assembly. Various strain relief techniques can be incorporated, depending on application.

5. If the need arises to remove an installed contact, during the assembly process or subsequent repair, individual contacts can be removed using LEMO extraction tool (part number: DCF.91.050.2LT). DO NOT reuse extracted contacts.


The only recommended chemical cleaner is Isopropyl Alcohol.




2P SERIES

► Exploded view of the REDEL 2P

Straight plug

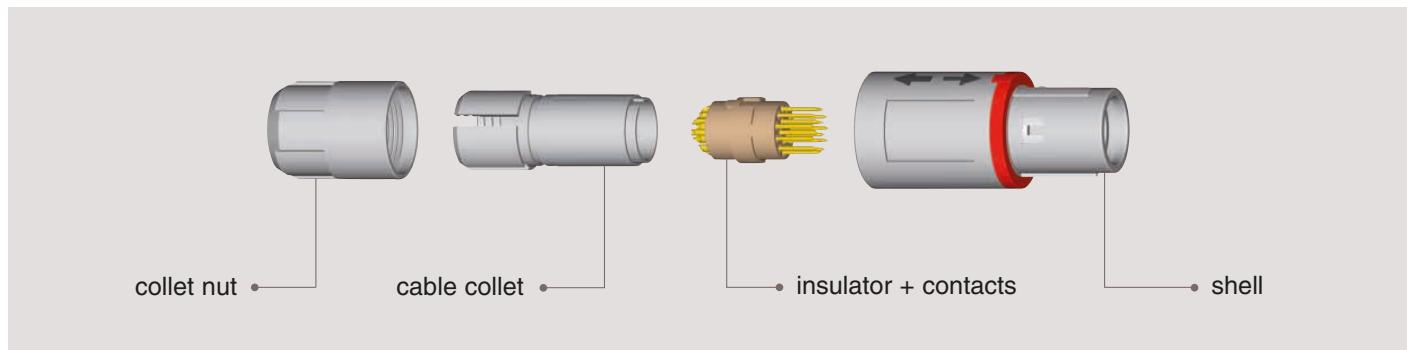


Straight plug with bend relief

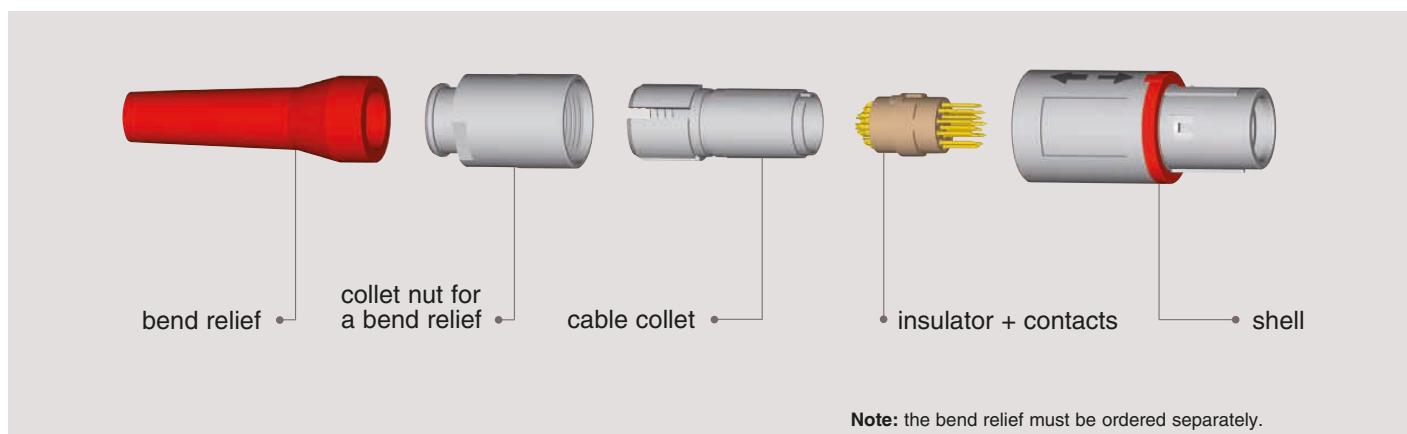


Note: the bend relief must be ordered separately.

Fixed socket

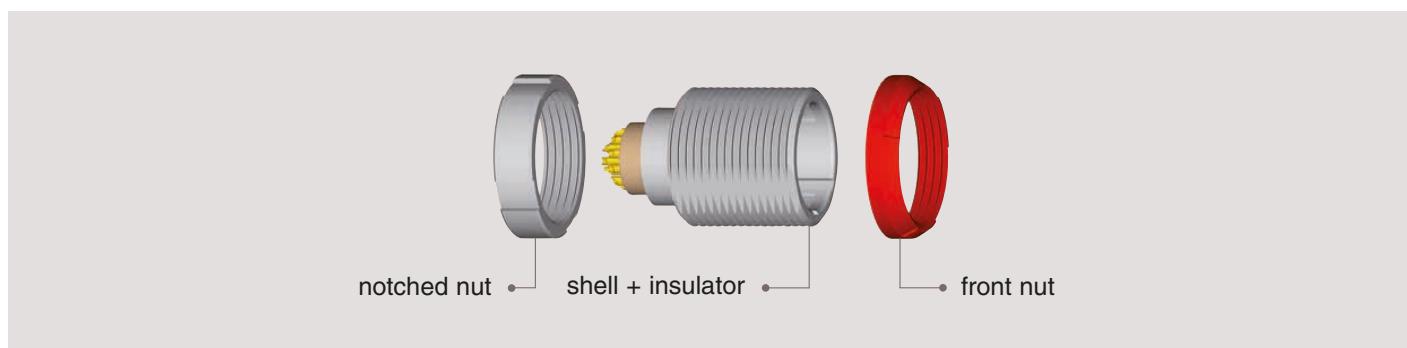

Free socket

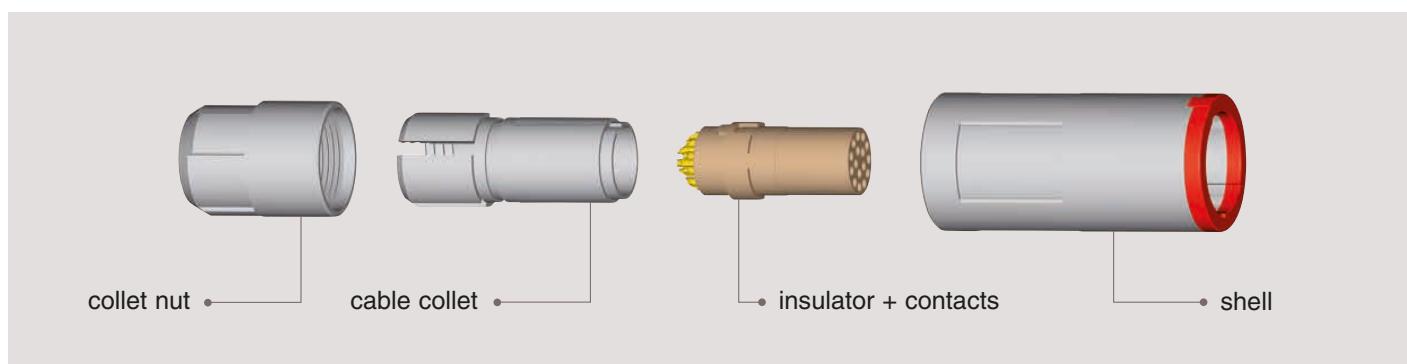


2P Series


This sleek 18 mm connector supports cable diameters up to 9.2 mm and is compatible with up to 34 solder or crimp contacts. Crafted from top-tier lightweight yet durable materials, it's engineered for optimal performance across a wide range of applications. Made from PSU (polysulfone), a UL-certified, self-extinguishing material that can be sterilized by either gas or steam, the 2P series connectors are also available in PEI (Polyetherimide ULTEM), offering enhanced resistance to sterilization cycles (ETO, gamma, steam...). The gold-plated contacts, layered over copper and nickel, are designed to withstand extensive mating/unmating cycles while maintaining exceptional signal integrity.

Featuring five intuitive keys on the plug nose, including Reverse Gender configurations, it ensures effortless blind mating, while the color-coded plug and socket flange provide instant visual confirmation of compatibility. For added protection, water-resistant options up to IP66 are available. The high-voltage configurations meet the rigorous IEC 60601-1 (3rd Ed.) medical safety standard, making this connector a perfect choice for high-stakes applications.


Standard models (page 33 to 35)

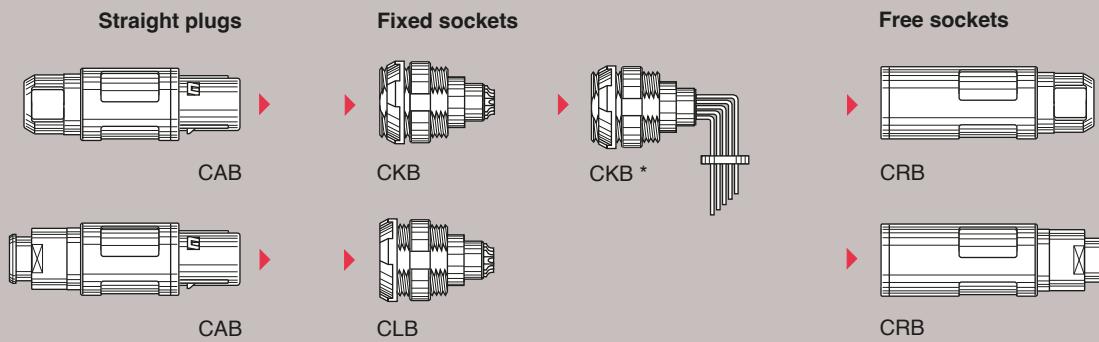


IP66 water-resistant models (page 36 to 37)

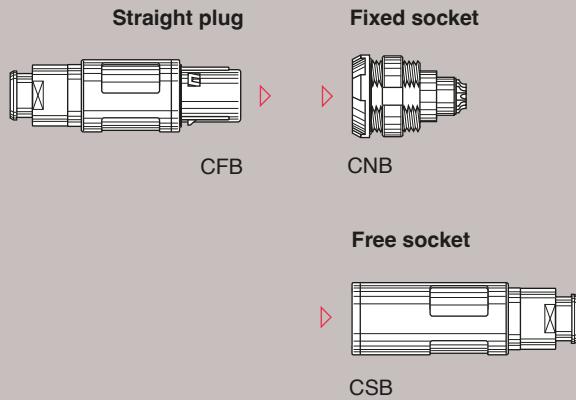

Disposable socket (limited use) (page 37)






Fluidic configuration (page 38)

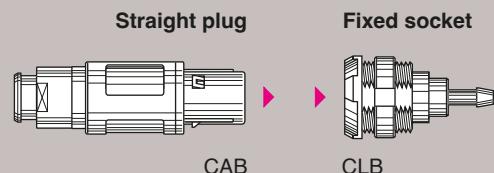

Note: * not available for High Voltage configurations.

Part numbering system

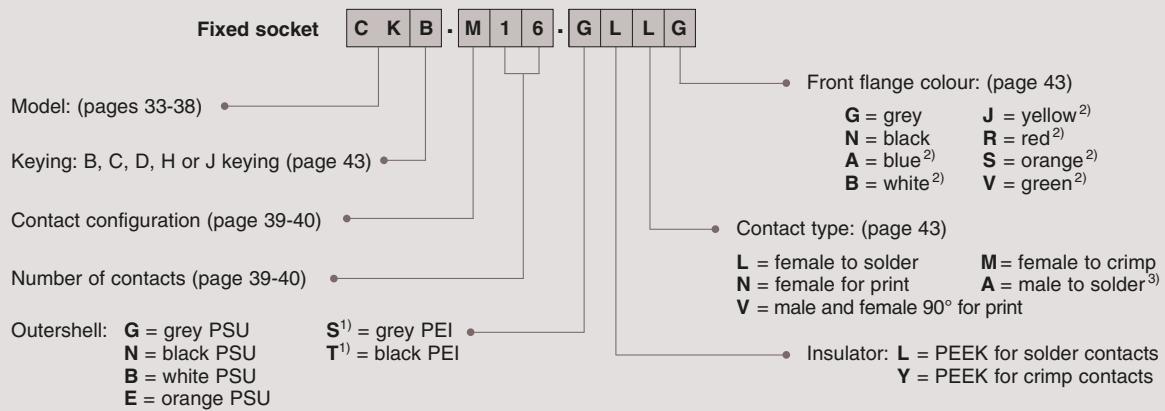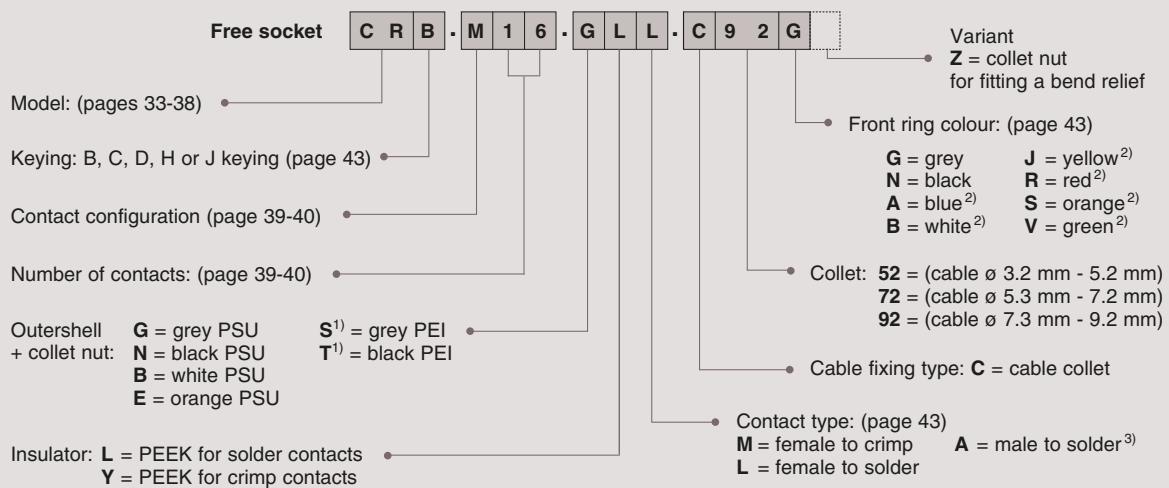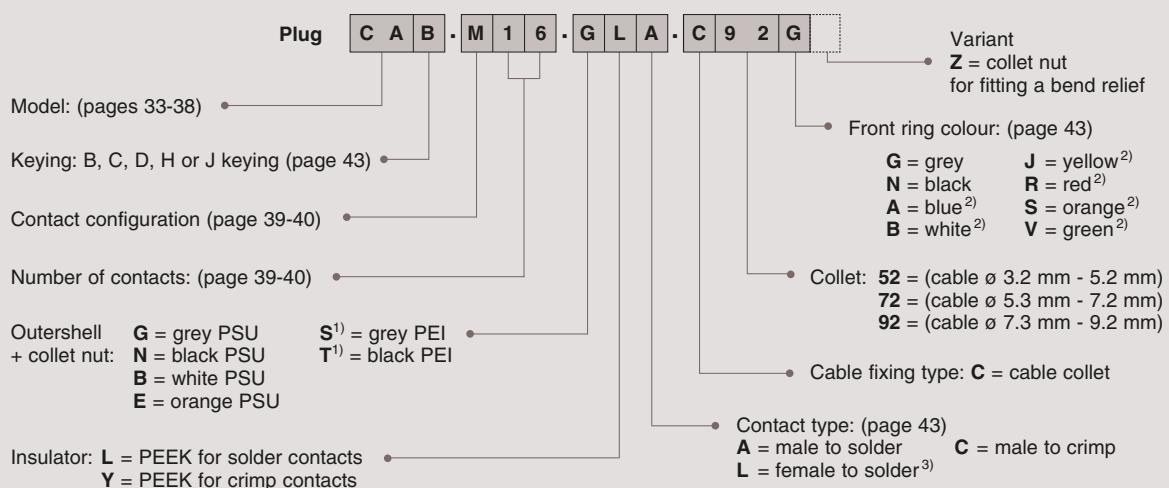

CAB.M16.GLA.C92G Straight plug with cable collet and alignment key (B), multipole type with 16 male contacts to solder, grey PSU outershell, PEEK insulator, collet for a cable ø 7.3 to 9.2 mm and grey front ring.

CRB.M16.GLL.C92G Free socket with two nuts and alignment key (B), multipole type with 16 female contacts to solder, grey PSU outershell, PEEK insulator, collet for a cable ø 7.3 to 9.2 mm and grey front ring.

CKB.M16.GLLG Fixed socket with two nuts and alignment key (B), multipole type with 16 female contacts to solder, grey PSU outershell, PEEK insulator, and grey front ring.

Note: ¹⁾ for extensive steam sterilization we propose polyetherimide ULTEM® (PEI). ²⁾ only available with PSU outershells.


³⁾ model available only with H and J keying and with 26 or 34 contacts (inverted contacts).

► Standard models (IP50)

C [] [] [] [] [] [] [] [] [] [] [] []


Fixed socket

- 1 Outershell
- 2 Insulator
- 3 Female crimp contact
- 4 Hexagonal nut



Straight plug

- 1 Outershell
- 2 Latch sleeve
- 3 Insulator
- 4 Male crimp contact
- 5 Collet + mid piece
- 6 Collet nut

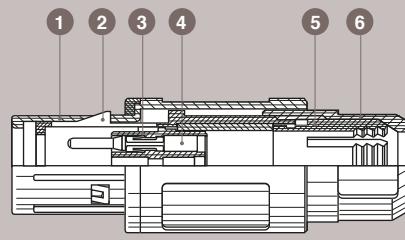

Characteristics	Value	Standards
Average retention force when pulling on the cable 1N = 0.102 kg	150 N	IEC 60512-8 test 15f
Cable retention force (depends on cable construction) 1N = 0.102 kg	150 - 250 N	IEC 60512-9 test 17c

Characteristics	Value	Standards
Endurance (latching) for plug	> 1000 cycles	IEC 60512-5 test 9a
Endurance (latching) for fixed socket	> 5000 cycles	IEC 60512-5 test 9a
Working temperature range (PSU)	-50/+150°C	–
Working temperature range (PEI)	-50/+170°C	–

CAB Straight plug with cable collet



Part Number	Cable ø	
	min	max
CAB.***.GLA.C52G	3.2	5.2
CAB.***.GLA.C72G	5.3	7.2
CAB.***.GLA.C92G	7.3	9.2







CAB Straight plug with cable collet and nut for fitting a bend relief



Part Number	Cable ø	
	min	max
CAB.***.GLA.C52GZ	3.2	5.2
CAB.***.GLA.C72GZ	5.3	7.2
CAB.***.GLA.C92GZ	7.3	9.2

Note: the bend relief must be ordered separately (see page 45).

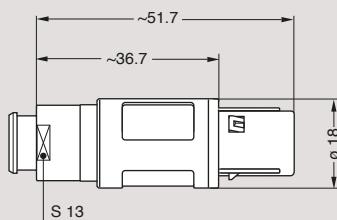

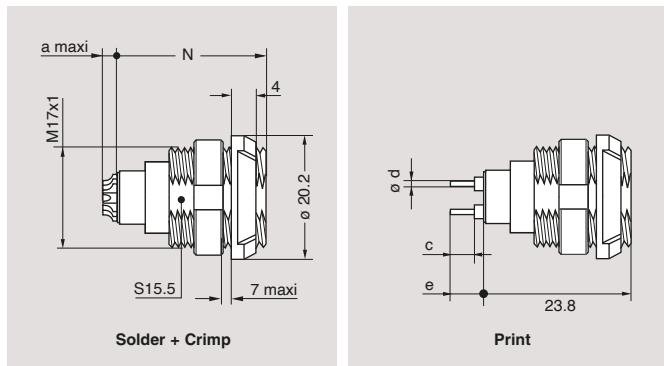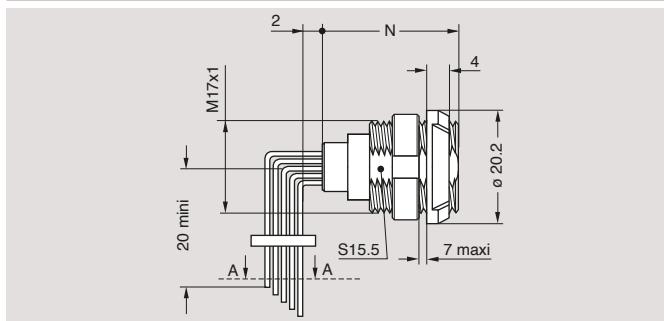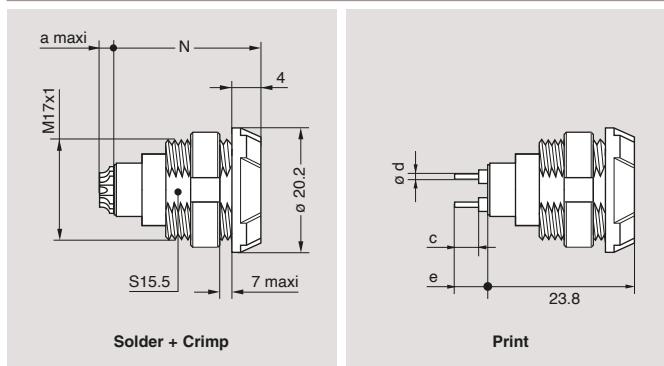CKB Fixed socket with two nuts (back panel mounting)

CKB Fixed socket with two nuts (back panel mounting)

CLB Fixed socket, nut fixing


Part Number	number of contacts	Contact						
		Solder		Crimp		Print		
		N	a	N	a	c	ø d	e
CKB.M16.GLLG	16	23.8	3.4	25.1	0	5.7	0.7	6.0
CKB.M19.GLLG	19	23.8	4.9	25.1	0	5.7	0.7	6.0
CKB.M26.GLLG	26	23.8	4.7	25.1	0	3.0	0.5	3.0
CKB.M32.GLLG	32	23.8	4.7	25.1	0	3.0	0.5	3.0

Part Number	number of contacts	Contact	
		Solder	
		N	a
CKB.H02.GLLG	2	26.6	2.5
CKB.H05.GLLG	5	26.6	2.5
CKB.H08.GLLG	8	26.6	2.5

Note: for PCB drilling pattern see page 47.
Panel hole see page 47.

Part Number	number of contacts	N (mm)
CKB.M12.GLVG	12	23.5
CKB.M16.GLVG	16	24.2
CKB.M19.GLVG	19	24.2
CKB.M26.GLVG	26	24.2

Note: for PCB drilling pattern see page 48.
Panel hole see page 47.


Part Number	number of contacts	Contact						
		Solder		Crimp		Print		
		N	a	N	a	c	ø d	e
CLB.M16.GLLG	16	23.8	3.4	25.1	0	5.7	0.7	6.0
CLB.M19.GLLG	19	23.8	4.9	25.1	0	5.7	0.7	6.0
CLB.M26.GLLG	26	23.8	4.7	25.1	0	3.0	0.5	3.0
CLB.M32.GLLG	32	23.8	4.7	25.1	0	3.0	0.5	3.0

Part Number	number of contacts	Contact	
		Solder	
		N	a
CLB.H02.GLLG	2	26.6	2.5
CLB.H05.GLLG	5	26.6	2.5
CLB.H08.GLLG	8	26.6	2.5

Note: for PCB drilling pattern see page 47.
Panel hole see page 47.


**CRB** Free socket with cable collet

Part Number	Cable ø	
	min	max
CRB.***.GLL.C52G	3.2	5.2
CRB.***.GLL.C72G	5.3	7.2
CRB.***.GLL.C92G	7.3	9.2

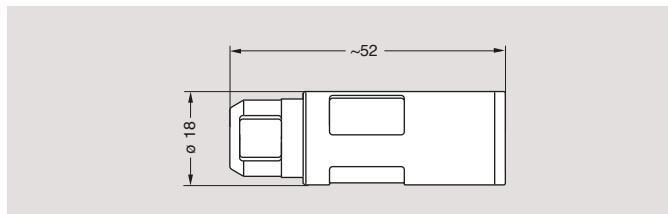**CRB** Free socket with cable collet and nut for fitting a bend relief

Part Number	Cable ø	
	min	max
CRB.***.GLL.C52GZ	3.2	5.2
CRB.***.GLL.C72GZ	5.3	7.2
CRB.***.GLL.C92GZ	7.3	9.2

Note: the bend relief must be ordered separately (see page 45).


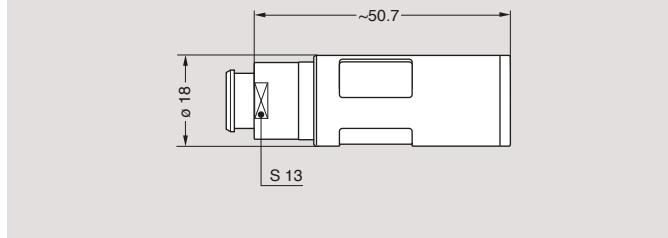


Water-resistant models (IP66)

C M

Fixed socket

- 1 Outershell
- 2 Insulator
- 3 Female crimp contact
- 4 Hexagonal nut
- 5 O-ring

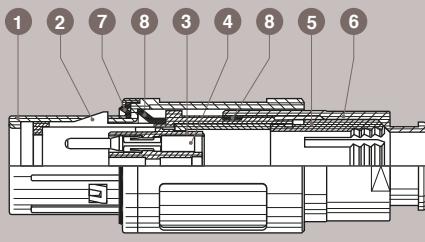

Straight plug

- 1 Outershell
- 2 Latch sleeve
- 3 Insulator
- 4 Male crimp contact
- 5 Collet + mid piece
- 6 Collet nut
- 7 Front seal
- 8 Gasket

Characteristics	Value	Standards
Average retention force when pulling on the cable 1N = 0.102 kg	90 N	IEC 60512-8 test 15f
Cable retention force (depends on cable construction) 1N = 0.102 kg	50 - 150 N	IEC 60512-9 test 17c


Characteristics	Value	Standards
Endurance (latching) for plug	> 1000 cycles	IEC 60512-5 test 9a
Endurance (latching) for fixed socket	> 5000 cycles	IEC 60512-5 test 9a
Working temperature range (PSU)	-50/+150°C	—
Working temperature range (PEI)	-50/+170°C	—
Index protection	IP66	IEC-60529

CFB Straight plug with cable collet and nut for fitting a bend relief



Part Number	Cable ø	
	min	max
CFB.***.GLA.C52GZ	3.2	5.2
CFB.***.GLA.C72GZ	5.3	7.2
CFB.***.GLA.C92GZ	7.3	9.2

Note: the bend relief must be ordered separately (see page 45).

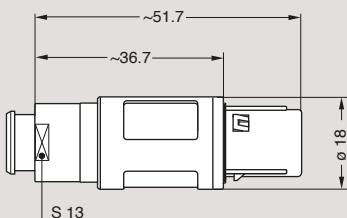



CNB Fixed socket, nut fixing



Part Number	number of contacts	Contact					
		Solder		Crimp		Print	
N	a	N	a	c	ø d	e	
CNB.M16.GLLG	16	23.8	3.4	25.1	0	5.7	0.7
CNB.M19.GLLG	19	23.8	4.9	25.1	0	5.7	0.7
CNB.M26.GLLG	26	23.8	4.7	25.1	0	3.0	0.5
CNB.M32.GLLG	32	23.8	4.7	25.1	0	3.0	0.5

Part Number	number of contacts	Contact	
		Solder	
N	a		
CNB.H02.GLLG	2	26.6	2.5
CNB.H05.GLLG	5	26.6	2.5
CNB.H08.GLLG	8	26.6	2.5


Note: for PCB drilling pattern see page 47.
Panel hole see page 47.

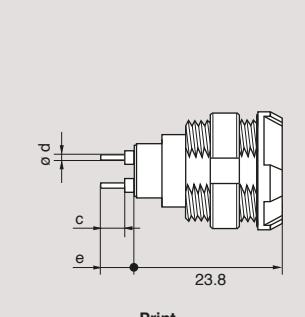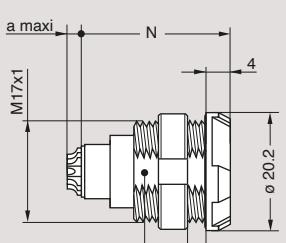


CSB Free socket with cable collet and nut for fitting a bend relief


Part Number	Cable ø	
	min	max
CSB.***.GLL.C52GZ	3.2	5.2
CSB.***.GLL.C72GZ	5.3	7.2
CSB.***.GLL.C92GZ	7.3	9.2

Note: the bend relief must be ordered separately (see page 45).

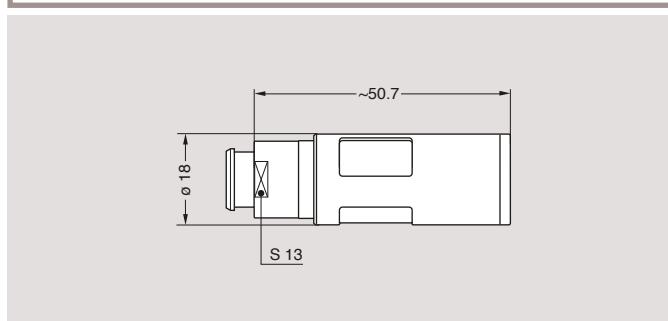

► Disposable socket (limited use)

c u

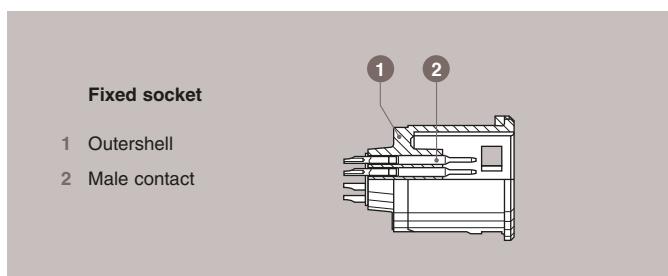

Characteristics	Value	Standards
Endurance for CU● (latching) ¹⁾	100 cycles min	IEC 60512-5 test 9a
Working temperature range (PSU)	-50/+150°C	–
Average latching force	5.5N	IEC 60512-7 test 13a
Average unmating force	8.5N	IEC 60512-7 test 13a
Average retention force	150N	IEC 60512-7 test 13a

Note: 1) with machined contacts. The outer shell and the insulator are moulded out of the same material (PSU).

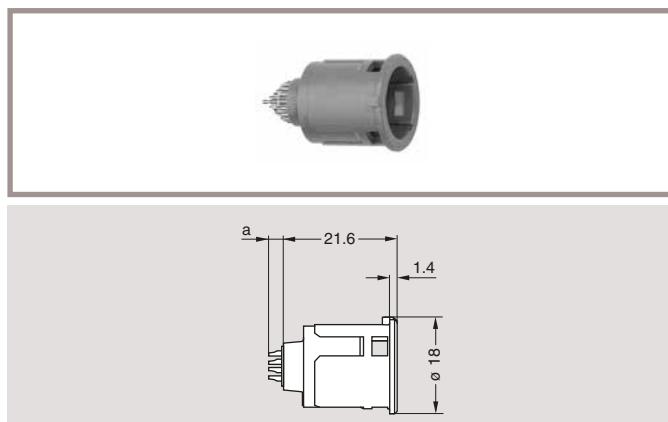CU● Fixed disposable socket, snap on fixing


Keying: H, J


Number of contacts: 26, 34

Number of contacts

26	5.5
34	7.0

Colour:
AA = blue
BB = white
GG = grey
JJ = yellow
NN = black
RR = red
VV = green

Note: not available with H26 and H34.
Contacts are ø 0.5 mm male with ø 0.44 mm solder buckets.

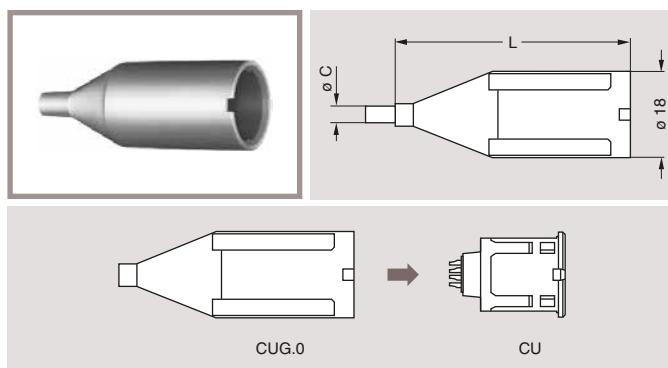
CUG Protective backshell for CU●


ø C (mm):
2.5 mm = 025
3.2 mm = 032
5.2 mm = 052

Length:
L = 52 mm
L = 72 mm

Colour:
B = white
G = grey

Note: ABS working temperature: -30°C +90°C.
All dimensions are in millimeters.

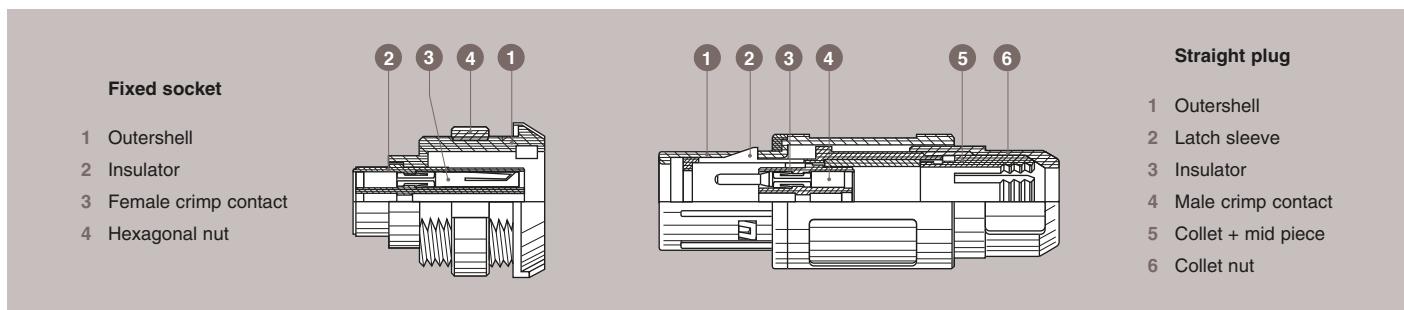


Characteristics	Value	Standards
Average retention force when pulling on the cable 1N = 0.102 kg	90 N	IEC 60512-8 test 15f
Cable retention force (depends on cable construction) 1N = 0.102 kg	50 - 150 N	IEC 60512-9 test 17c

Characteristics	Value	Standards
Endurance (latching) for plug	> 1000 cycles	IEC 60512-5 test 9a
Endurance (latching) for fixed socket	> 5000 cycles	IEC 60512-5 test 9a
Working temperature range (PSU)	-50/+150°C	—
Working temperature range (PEI)	-50/+170°C	—

CAB Straight plug with cable collet



Part Number	Cable ø	
	min	max
CAB.012.GLA.C52G	3.2	5.2
CAB.012.GLA.C72G	5.3	7.2
CAB.012.GLA.C92G	7.3	9.2

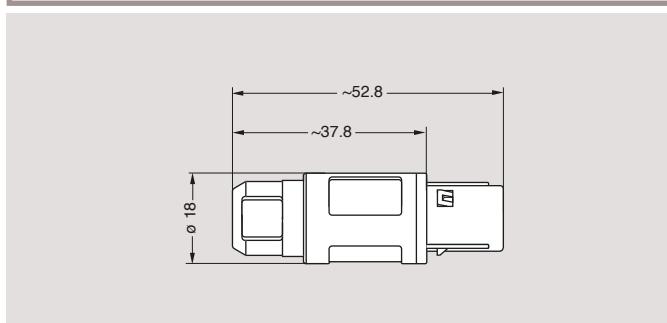
CLB Fixed socket nut fixing


Part Number	Number of low voltage contacts	Fluidic contact	Maximum working pressure (bars)
CLB.012.GLLG	4	without valve	6
CLB.015.GLLG	10	without valve	6
CLB.P12.GLLG	4	with valve ¹⁾	6
CLB.P15.GLLG	10	with valve ¹⁾	6

Note: 1) fluidic contact must be ordered separately (see page 40).











Panel hole see page 47.

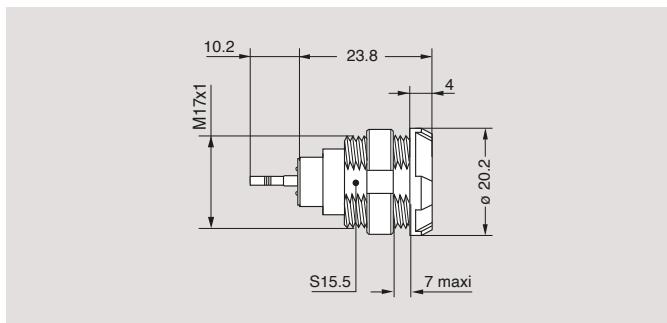

▶ Insert configuration



Multipole

Multipole	Male solder contacts	Female solder contacts	Reference	Number of contacts	Contact \varnothing (mm)	Solder bucket \varnothing (mm) ⁴⁾	Crimp bucket \varnothing (mm) ⁴⁾	Contact type			Test voltage (kV DC) ¹⁾ Contact-contact	Air clearance min ²⁾ (mm) Creepage distance min ³⁾ (mm)	Rated current (A)	
								Solder	Crimp	Print (straight)	Print (elbow)			
			M02	2	2.0	1.8	2.4	●	●	●	●	2.97	1.60	30.0
			M03	3	1.6	1.4	1.9	●	●	●	●	3.39	1.50	17.0
			M04	4	1.3	1.0	1.4	●	●	●	●	2.62	1.80	15.0
			M05	5	1.3	1.0	1.4	●	●	●	●	2.47	1.75	14.0
			M06	6	1.3	1.0	1.4	●	●	●	●	1.91	0.85	12.0
			M07	7	1.3	1.0	1.4	●	●	●	●	2.47	0.95	11.0
			M08	8	0.9	0.8	1.1	●	●	●	●	2.12	1.00	10.0
			M10	10	0.9	0.8	1.1	●	●	●	●	2.05	0.75	8.0
			M12	12	0.7	0.8	0.8	●	●	●	●	1.77	0.85	7.0
			M16	16	0.7	0.8	0.8	●	●	●	●	1.63	0.65	5.0
			M19	19	0.7	0.8	0.8	●	●	●	●	1.48	0.60	4.5
			M26	26	0.5	0.5	—	●	—	●	●	1.27	0.55	2.0
			M32	32	0.5	0.5	—	●	—	●	—	1.06	0.35	2.0
			M34	34	0.5	0.4	—	●	—	—	—	0.92	0.30	1.5














Note: 1) depending on specific application and related standard, more restrictive operating voltage may apply, see page 68.

2) shortest distance in air between two conductive parts.

3) shortest distance along the surface of the insulating material between two conductive parts.

4) for a given AWG, the diameter of some stranded conductor design is larger than the solder cup diameter (see page 69).

Fluidic, Coaxial, High Voltage

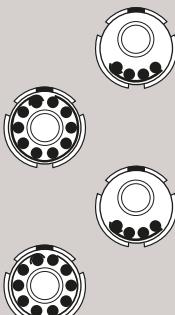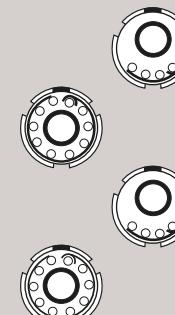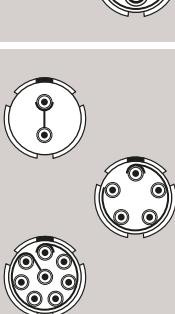		   		Reference	Number of contacts	Contact \varnothing (mm)	Solder bucket \varnothing (mm) ⁴⁾	Crimp bucket \varnothing (mm) ⁴⁾	Contact type			Test voltage (kV DC) ¹⁾ Contact-contact	Air clearance min ²⁾ (mm) ³⁾	Creepage distance min ³⁾ (mm)	Rated current (A)
Solder									Crimp	Print (straight)	Print (elbow)				
Fluidic	   	012	4	0.7	0.8	0.8	•	•	—	—	—	1.20	0.60	5.0	
		015	10	0.7	0.8	0.8	•	•	—	—	—	1.63	0.90	5.0	
		P12 ⁶⁾	4	0.7	0.8	0.8	•	•	—	—	—	1.20	0.60	9.0	
		P15 ⁶⁾	10	0.7	0.8	0.8	•	•	—	—	—	1.63	0.90	6.0	
Coaxial	  	804 ⁵⁾	4	0.7	0.8	0.8	•	•	—	—	—	1.20	0.60	5.0	
		810 ⁵⁾	10	0.7	0.8	0.8	•	•	—	—	—	1.77	0.90	5.0	
		814 ⁵⁾	14	0.5	0.4	—	•	—	—	—	—	2.40	0.30	1.5	
High Voltage	  	H02	2	0.7	0.8	—	•	—	—	—	—	17.96	8.90 ⁷⁾	11.0	
		H05	5	0.7	0.8	—	•	—	—	—	—	16.40	7.96 ⁷⁾	8.0	
		H08	8	0.7	0.8	—	•	—	—	—	—	14.56	7.42 ⁷⁾	6.5	
High Voltage + High Density - PFA	 	H26	26	0.5	0.4	—	•	—	—	—	—	6.0	5.6 ⁸⁾	1.0	
		H34	34	0.5	0.4	—	•	—	—	—	—	5.6	5.6 ⁸⁾	1.0	

Note: 1) depending on specific application and related standard, more restrictive operating voltage may apply, see page 68.

2) shortest distance in air between two conductive parts.

3) shortest distance along the surface of the insulating material between two conductive parts.

4) for a given AWG, the diameter of some stranded conductor design is larger than the solder cup diameter (see page 69).

5) configuration 804 and 810 use «C» type coaxial contact. Configuration 814 uses "0R" coaxial contact, see R series catalogue page 16 for details and stripping length.

6) configuration P12 and P15 use fluidic contact with valve (FGG.P1.150.ACV and EGG.P1.150.ACV). Contacts must be ordered separately.


7) for insert configuration H02, H05 and H08: the use of potting type Epoxy* or adhesive-lined (strongly recommended) heatshrink tubes over each termination is necessary to achieve the indicated Air Clearance and Creepage distance values as well as the indicated Test voltage.

8) for insert configuration H26 and H34: the installation of the dedicated tubes on each contact, supplied with the connector is essential to achieve the creepage and air clearance distances indicated in the table. For the additional potting we recommend using the biocompatible EPO-TEK MED-353ND resin.

Part numbering system (High Voltage – High Density - PFA models)

Benefiting from the cutting-edge technical and industrial assets of the 2P series, the patented design of the 2P High Voltage and High Density configurations provides unmatched connection performance. The exceptional robustness of its components ensures seamless and secure integration throughout the lifespan of the latest generation of electrophysiology medical devices and PFA (Pulsed Field Ablation) catheters. The miniaturization and ergonomic design of the 26 and 34 contact configurations, delivering up to 5 kV per pin, make this latest-generation series the ideal solution for all applications requiring compact and extremely high-performing interconnect solutions.

Important information: Each reference of the Redel 2P High voltage series H26 and H34 is sold **in sets of 20 pieces** and includes respective quantities of polyimide tubes and potting rings required for the cable assembly. Ordering individual references is not possible.

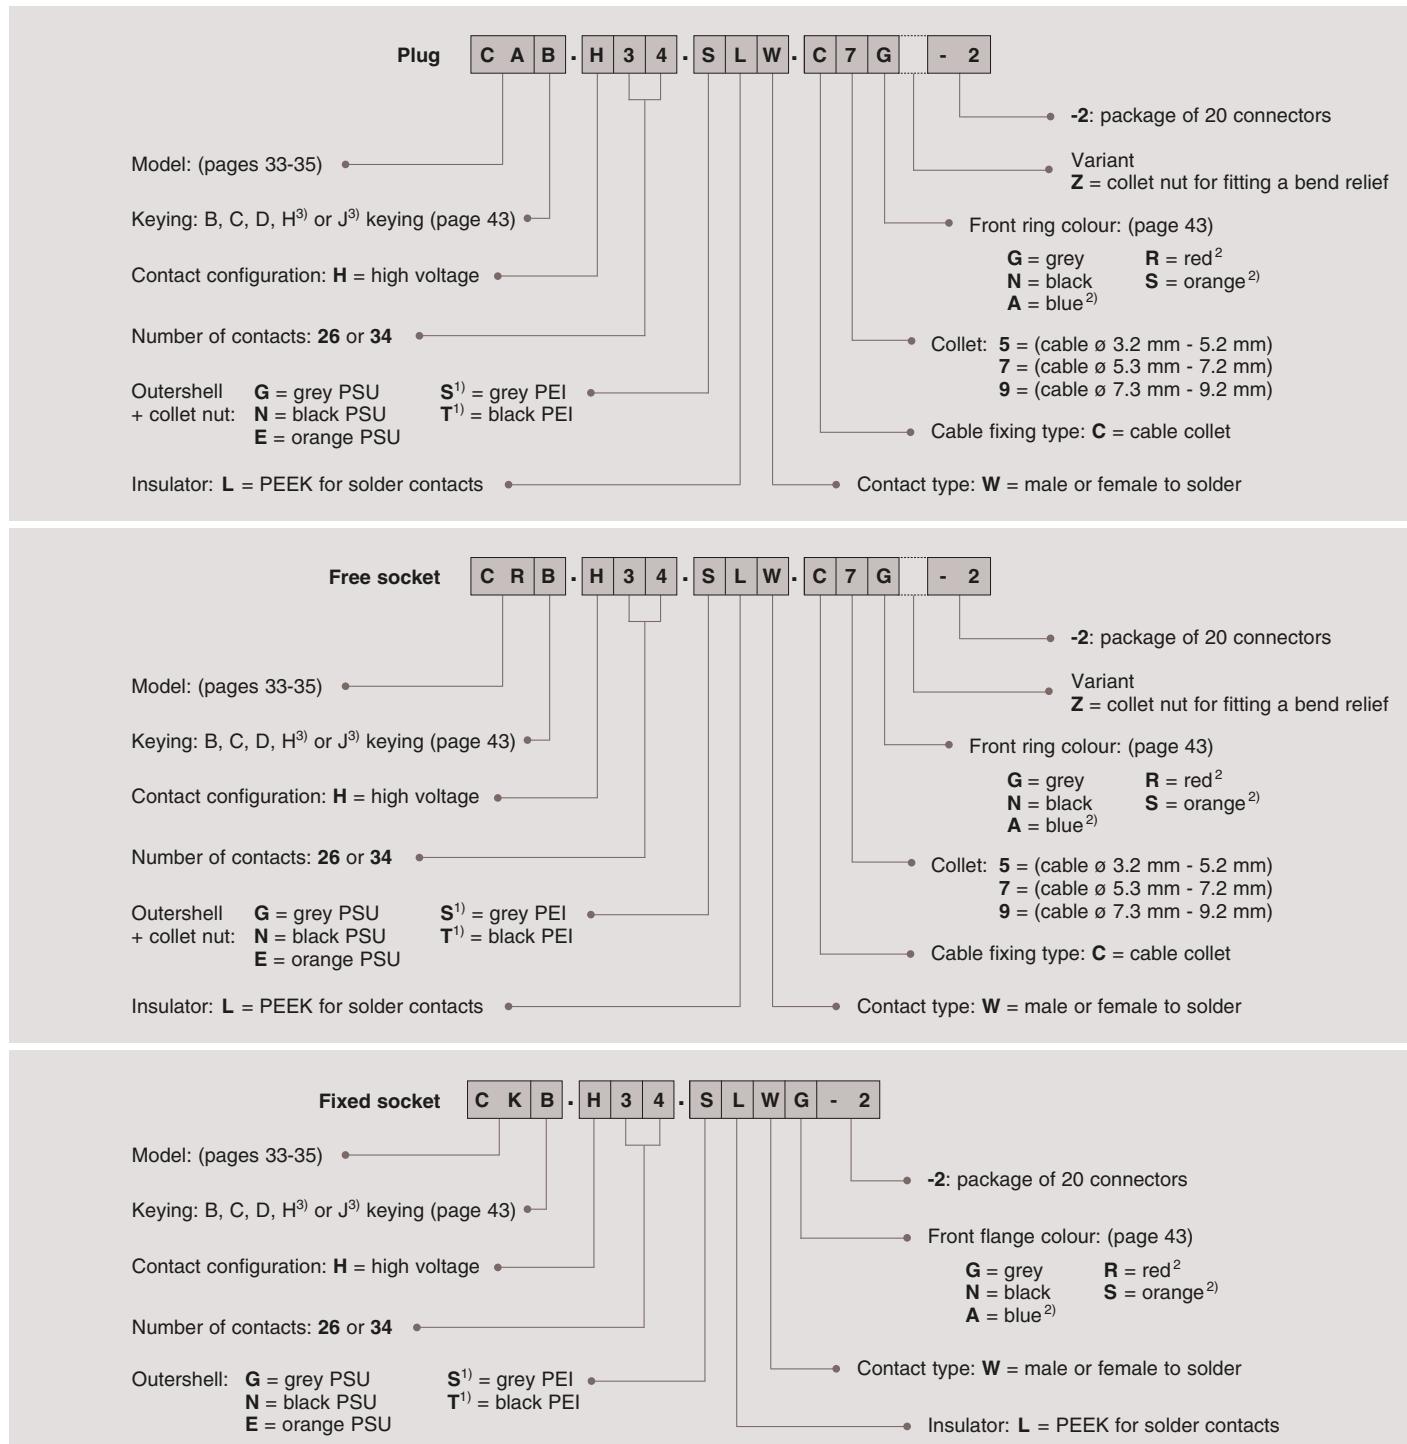

Note:

¹⁾ for increased and optimal steam sterilization cycles (autoclave), we highly recommend the use of PEI material (polyetherimide).

²⁾ only available with PSU outershells.

³⁾ H and J keying apply exclusively for reverse gender configurations (inverted contacts).



Important information: Each reference of the Redel 2P High voltage series H26 and H34 is sold in sets of 20 pieces and includes respective quantities of polyimide tubes and potting rings required for the cable assembly. Ordering individual references is not possible.

Reference of the **set CAB.H34.SLW.C7G-2** consists of:



20 x straight plugs with cable collet and alignment **key B**, multipole type with **34 x high voltage male contacts** (up to 5 kV) to **solder, grey PEI outershell**, PEEK insulator, collet for a cable ø 5.3 mm to 7.2 mm and **grey front ring (PEI)**



700 x polyimides tubes (540 x for H26 configurations) for cable assembly – rear part of the connector (essential to achieve the indicated (*8) creepage and air clearance distances)



20 x potting rings for cable assembly - rear part of the connector (EPO-TEK MED-353ND potting resin is highly recommended)

Reference of the **set CKB.H34.SLWG-2** consists of:



20 x fixed sockets with two nuts and alignment **key B**, multipole type with **34 x high voltage female contacts** (up to 5 kV) to **solder, grey PEI outershell**, PEEK insulator and **grey PEI front ring**



700 x polyimides tubes (540 x for H26 configurations) for cable assembly – rear part of the connector (essential to achieve the indicated (*8) creepage and air clearance distances)



20 x potting rings for cable assembly - rear part of the connector (EPO-TEK MED-353ND potting resin is highly recommended)

Reference of the **set CRB.H34.SLW.C7G-2** consists of:



20 x free sockets with cable collet and alignment **key B**, multipole type with **34 x high voltage female contacts** (up to 5 kV) to **solder, grey PEI outershell**, PEEK insulator, collet for a cable ø 5.3 mm to 7.2 mm and **grey front ring (PEI)**



700 x polyimides tubes (540 x for H26 configurations) for cable assembly – rear part of the connector (essential to achieve the indicated (*8) creepage and air clearance distances)



20 x potting rings for cable assembly - rear part of the connector (EPO-TEK MED-353ND potting resin is highly recommended)

► Alignment key

c

Verify the third digit of the part number in order to select the right keying.
The standard keying is «B» coded.

Keying (plug front view)		Standard gender			Reverse gender	
Reference	B	C	D	H	J	
Contact type for plug	male	male	male	female	female	
Contact type for socket	female	female	female	male	male	
Availability	●	○	○	●	○	

Note: ● Standard / ○ On demand

► Outer shell material

c

Material	Ref.	Colour	Temperature	Availability
PSU	G	Grey	-50° / +150°C	●
	N	Black		●
	B	White		○
	E	Orange		●

Material	Ref.	Colour	Temperature	Availability
PEI	S	Grey	-50° / +170°C	●
	T	Black		●

Note: for extensive steam sterilization we propose polytherimide ULTEM® (PEI).

► Contact type

c

Select the type of contact: solder or crimp?

Plug

Type	Male	Female
solder	A	L
solder ¹⁾	W	W
crimp	C	—

Socket

Type	Male	Female
solder	A	L
solder ¹⁾	W	W
crimp	—	M
print	—	N
print 90°	V	V

When should I use crimp rather than solder contacts ?

Soldering

- recommended for small volumes
- requires little amount of tooling (soldering iron)
- requires more time

Crimping

- recommended for large volumes
- no heat is required to make the connection
- for contacts with high density
- for use in high temperature environment
- requires extra tooling (crimping tools)

Note: ¹⁾ available only with High Voltage H26 and H34 configurations.

► Front flanges / Ring colour coding

c

G	N	A	B	J	R	S	V
grey	black	blue	white	yellow	red	orange	green
●	●	●	○	○	●	●	○

Note: ● Standard / ○ On demand

► Accessories

CAG-CLG Insulator for crimp contacts




male / white marking



female / red marking


Contact configuration	Insulator part number	
	For male contact	For female contact
M02	CAG.302.YL	CLG.402.YL
M03	CAG.303.YL	CLG.403.YL
M04	CAG.304.YL	CLG.404.YL
M05	CAG.305.YL	CLG.405.YL
M06	CAG.306.YL	CLG.406.YL
M07	CAG.307.YL	CLG.407.YL
M08	CAG.308.YL	CLG.408.YL
M10	CAG.310.YL	CLG.410.YL
M12	CAG.312.YL	CLG.412.YL
M16	CAG.316.YL	CLG.416.YL
M19	CAG.319.YL	CLG.419.YL

CAB Collet

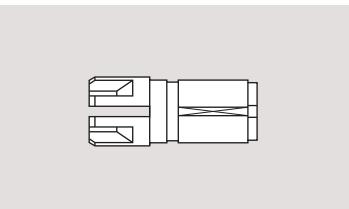

Contact configuration	nb. of contacts	Ø contact (mm)	Kit contact part number	
			Male	Female
M02	2	2.0	CAG.575.02C	CLG.675.02M
M03	3	1.6	CAG.570.03C	CLG.670.03M
M04	4	1.3	CAG.565.04C	CLG.665.04M
M05	5	1.3	CAG.565.05C	CLG.665.05M
M06	6	1.3	CAG.565.06C	CLG.665.06M
M07	7	1.3	CAG.565.07C	CLG.665.07M
M08	8	0.9	CAG.560.08C	CLG.660.08M
M10	10	0.9	CAG.560.10C	CLG.660.10M
M12	12	0.7	CAG.555.12C	CLG.655.12M
M16	16	0.7	CAG.555.16C	CLG.655.16M
M19	19	0.7	CAG.555.19C	CLG.655.19M


CKG Plastic front nut for CKB models

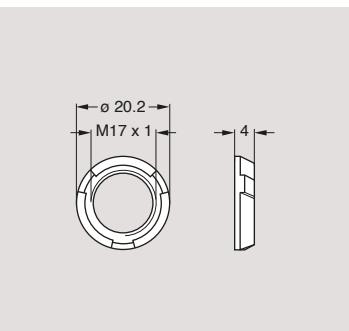

Part Number	Cable ø (mm)	
	min.	max.
CAB.752...	3.2	5.2
CAB.772...	5.3	7.2
CAB.792...	7.3	9.2

Note: ... = UG (grey PSU), UN (black PSU), TG (grey PEI), TN (black PEI).

CAM Nut for fitting a GMA.2B bend relief

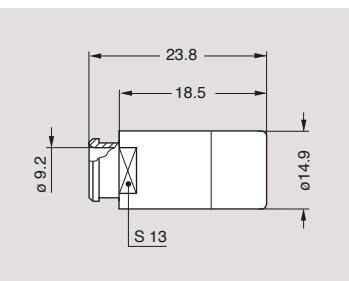


Note: all dimensions are in millimeters


Part Number	Mat.	Colours	Choice
CKG.240.UA	PSU	blue	●
CKG.240.UG	PSU	grey	●
CKG.240.UJ	PSU	yellow	○
CKG.240.UN	PSU	black	●
CKG.240.UR	PSU	red	●
CKG.240.UV	PSU	green	○

Note: ● Standard / ○ On demand


Part Number	Mat.	Colours
CAM.130.UG	PSU	grey
CAM.130.UN	PSU	black
CAM.130.TG	PEI	grey

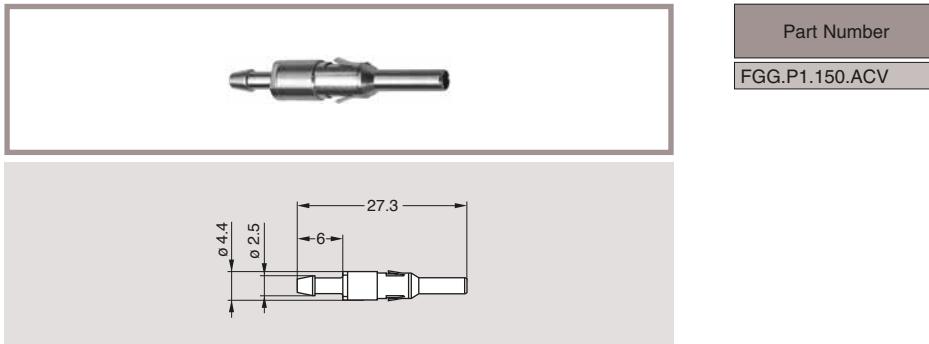FGG.P1 Male fluidic contact with valve


Note: Connectors are delivered without the P1 contacts.

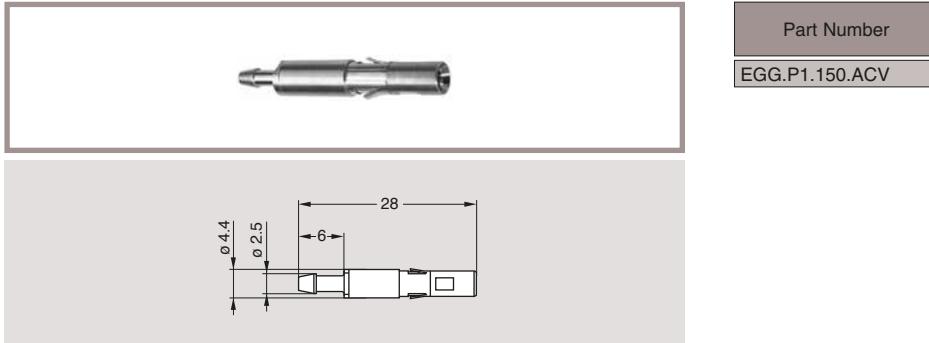EGG.P1 Female fluidic contact with valve


Note: Connectors are delivered without the P1 contacts.

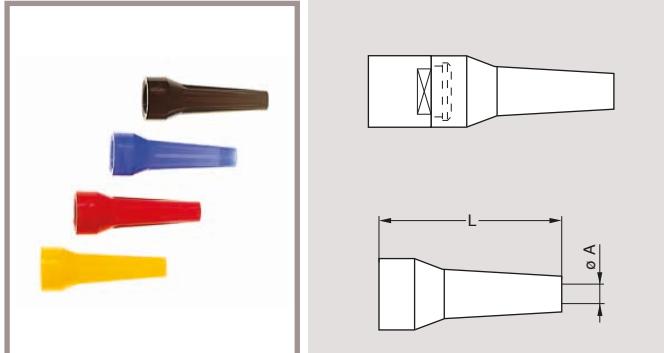GMA Bend relief


A bend relief absorbs the force that may be exerted on cables.
These are designed for plugs and free sockets with cable collet and nut.

Part Number	Dimensions (mm)				Material	Temperature range				
	Bend relief		Cable ø			in dry atmosphere				
	A	L	max.	min.						
GMA.2B.040.DG	4.0	36	4.5	4.0	TPU (Thermoplastic Polyurethane)	-40°C, +80°C	-			
GMA.2B.045.DG	4.5	36	5.0	4.5						
GMA.2B.050.DG	5.0	36	5.5	5.0						
GMA.2B.060.DG	6.0	36	6.5	6.0						
GMA.2B.070.DG	7.0	36	7.7	7.0						
GMA.2B.080.DG	7.8	36	8.8	7.8						
GMA.2B.040.RG	4.0	41	4.4	4.0	Silicone elastomer VMQ	-60°C, +200°C	+140°C			
GMA.2B.045.RG	4.5	41	5.0	4.5						
GMA.2B.051.RG	5.1	41	5.6	5.1						
GMA.2B.057.RG	5.7	41	6.2	5.7						
GMA.2B.063.RG	6.3	41	7.0	6.3						
GMA.2B.071.RG	7.1	41	7.9	7.1						
GMA.2B.080.RG	8.0	41	9.0	8.0						


Note: the last letter «G» of the part number indicates a grey colour, see the adjacent table and replace letter «G» by the letter of the colour required.

Reference	Colours	Choice
A	blue	●
B	white	○
G	grey	●
J	yellow	○
M	brown	○
N	black	●
R	red	●
S	orange	●
V	green	○

Note: ● Standard / ○ On demand

Note: the selection of pigments, which should remain stable at high temperature, is limited by the new regulations. For this reason, some colours will be a shade different from those used for TPU bend reliefs. The selected solutions represent the best possible compromise.

► Tooling

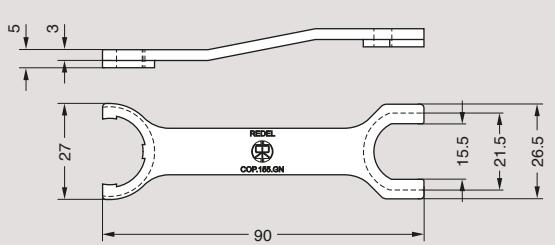COP.155.GN Spanner for rear nut


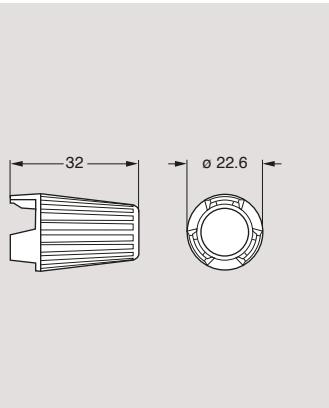
Material: PA 6.6

DPC Manual crimping tool

Fig. A



Fig. B


COB.202.GN Spanner for front nut


Material: PA 6.6

DCE Turret for ø 1.6-2.0



Note: these turrets can be used with manual crimping tool according to MIL-C-22520/1-01 standard.

DCC Manual extractor for crimp contacts

DCE Positioners for crimp contacts



Type	Contact ø (mm)	Conductor AWG	Positioner part number		Selector No Setting	Part number extractor
			Male	Female		
M02	2.0	12-14-16	DCE.91.202.BVCM	DCE.91.202.BVCM	-	DCC.20.25B.LAG
M03	1.6	14-16-18	DCE.91.162.BVCM	DCE.91.162.BVCM	-	DCC.16.25B.LAG
M04/M05/M06/M07	1.3	18-20	DCE.91.132.BVC	DCE.91.132.BVM	8-7	DCC.13.15B.LAG
M08/M10	0.9	20-22-24	DCE.91.092.BVC	DCE.91.092.BVM	6-5-5	DCC.09.05B.LAG
M12/M16/M19	0.7	22-24-26	DCE.91.072.BVC	DCE.91.072.BVM	6-5-5	DCC.07.04B.LAG
M26/M32	0.5	28-30-32	DCE.91.052.BVC	DCE.91.052.BVM	4-3-3	DCC.05.02B.LAG

Note: this model is used for male and female contacts. The variance in conductor stranding diameter for the minimum AWG is such that some can have a cross section which is not sufficient to guarantee crimping as per IEC 60352-2 standard.

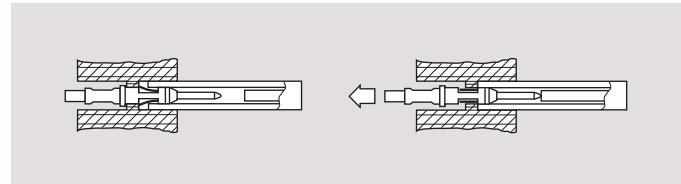

► Panel hole


For CK●, CL●, and CN●

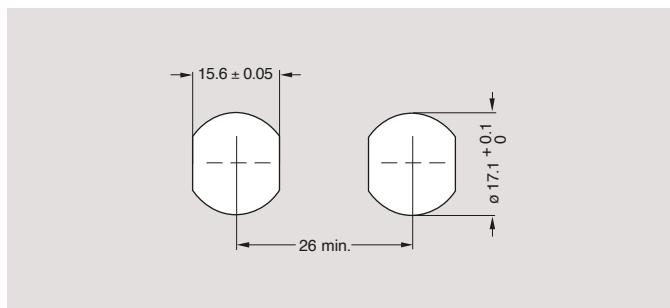













Note: socket mounting nut torque = 0.8 Nm.

► PCB drilling pattern

For straight contacts


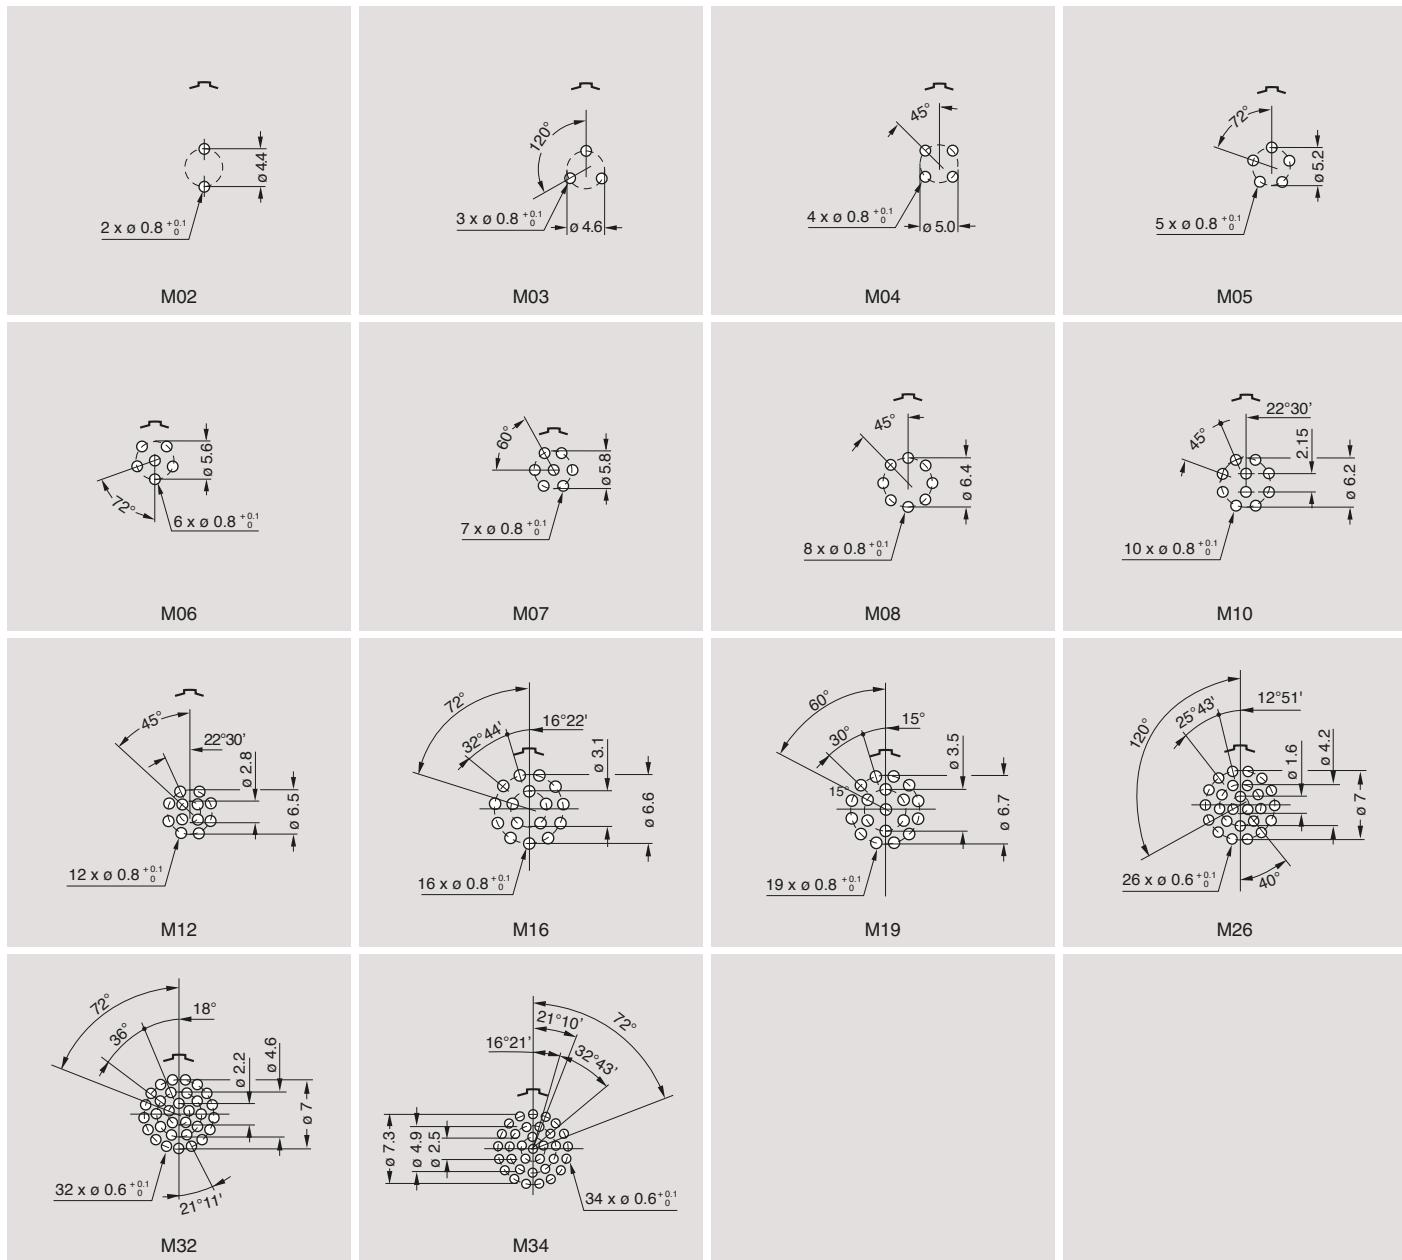


For 90° elbow contacts (A-A view)

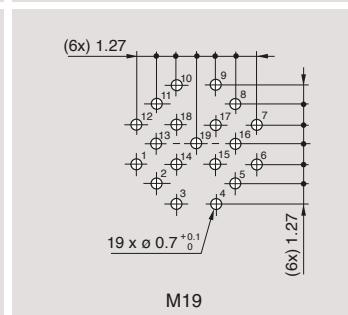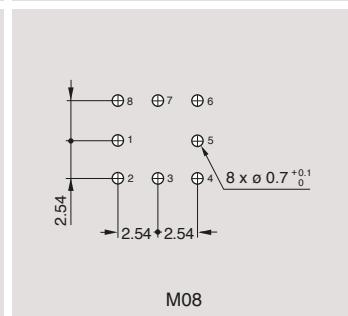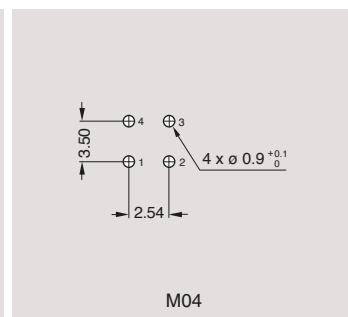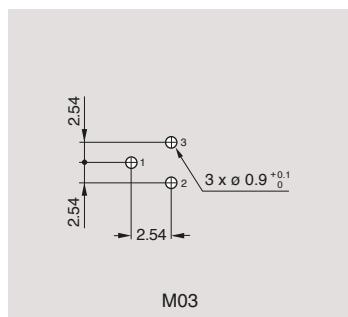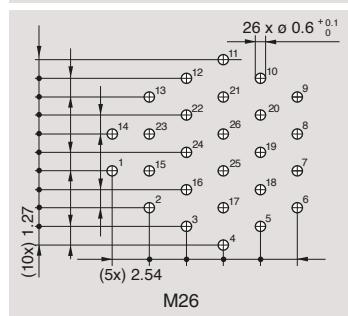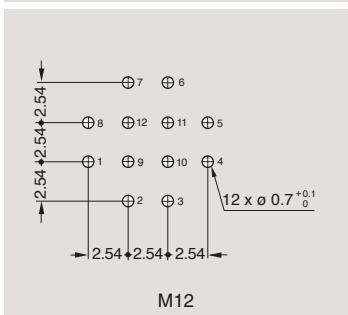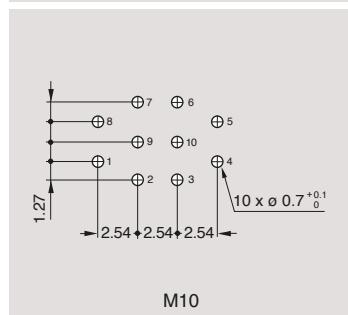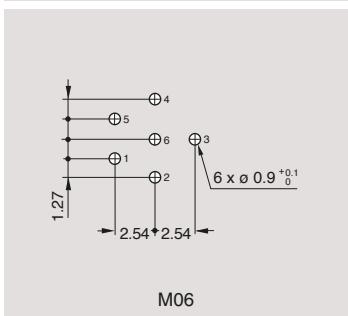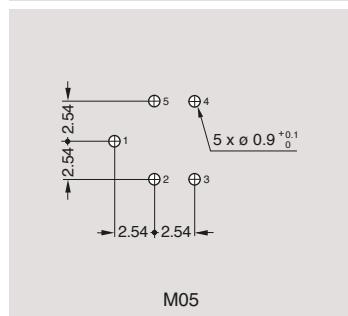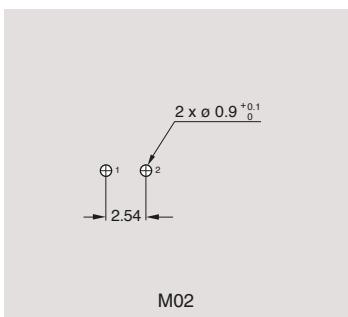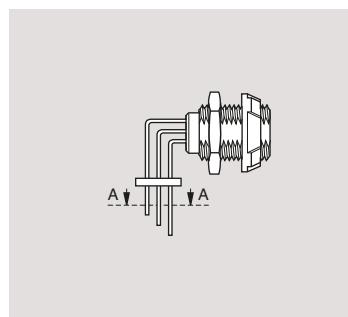


► Assembly instructions

Solder contacts

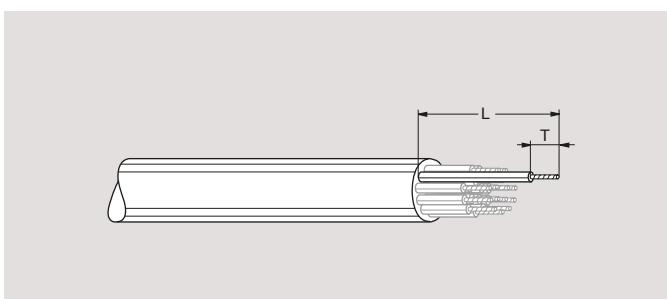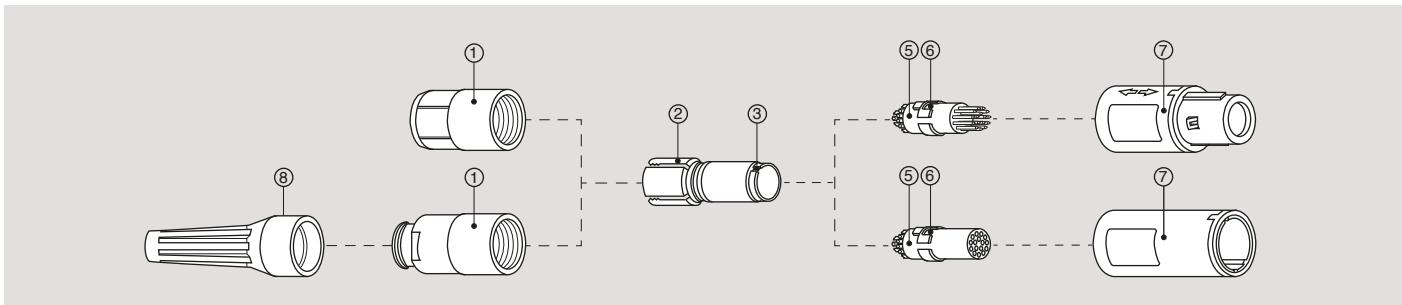


1. Strip the cable according to the lengths given in the table. Tin the conductors.


Configuration	Dimensions (mm)	
	L	T
M02	18.0	4.0
M03, M04, M05, M06, M07	18.0	3.5
M08, M10, M12, M16, M19	18.0	3.0
M26, M32, M34	17.0	2.5

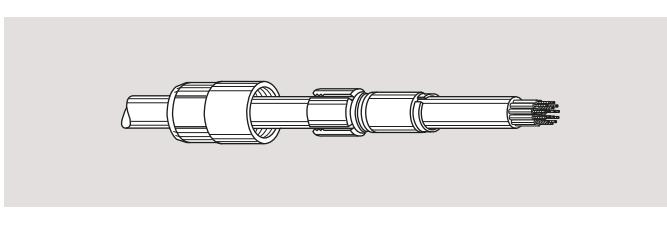


2. Slide the collet nut (1) and then the collet (2) onto the cable. Slide the bend relief (8) (if ordered separately) onto the cable.

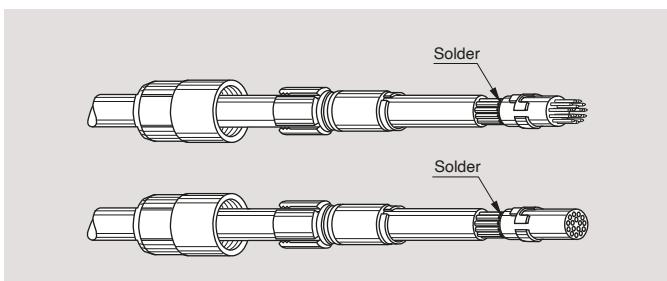

3. Solder conductors into contacts, making sure that neither solder nor flux gets onto the insulator or cable insulation.






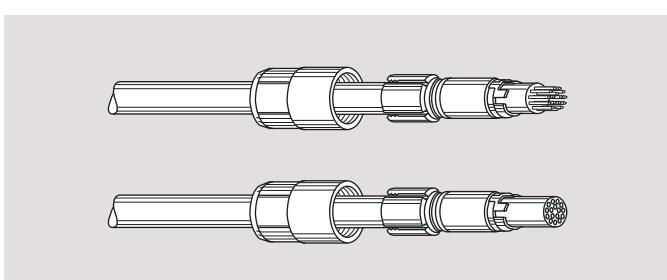


4. Slide the collet (2) forward and locate slot (3) in the key of the insulator (5). Slide collet nut (1) over collet (2) and then push the whole assembly into the shell (7) whilst positioning it to ensure that the slot (6) of insulator (5) locates in the inside key of the shell. Tighten the collet nut (1) to the maximum torque of 0.5 Nm. Push the bend relief (8) (if ordered separately) onto the collet nut (1).

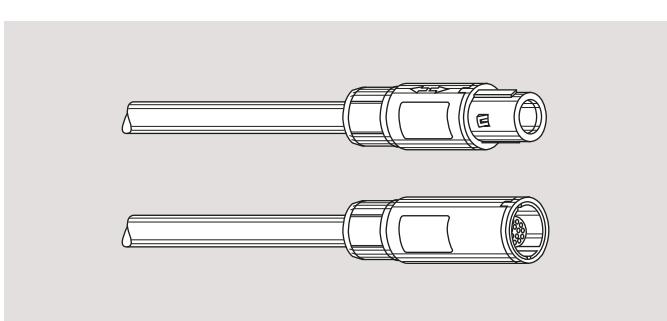

For PSU only:

We recommend the use of Vibra-tite VC-6, Araldite CW2243 + Aradur HY 2966, Ablestik FDA2 Trapax or ThreeBond 1401 to secure the connector collet nut. The use of other materials could result in damage to the connector. The only recommended chemical cleaner is Isopropyl Alcohol.

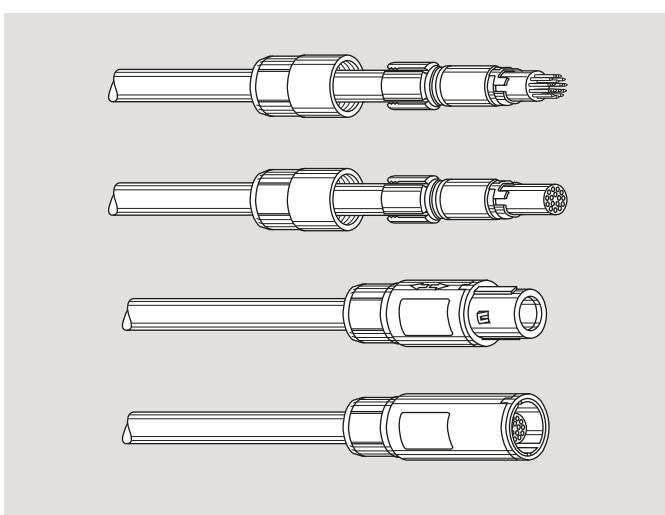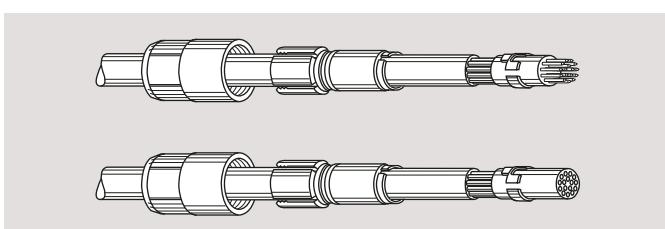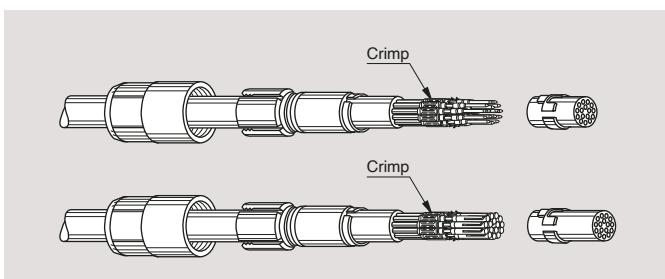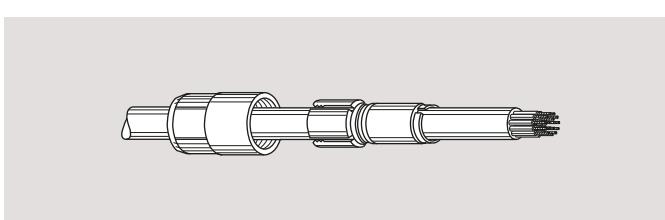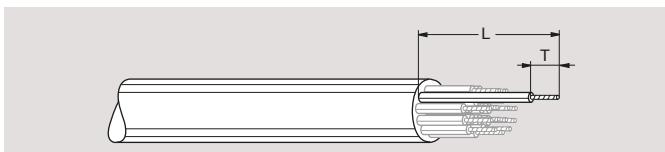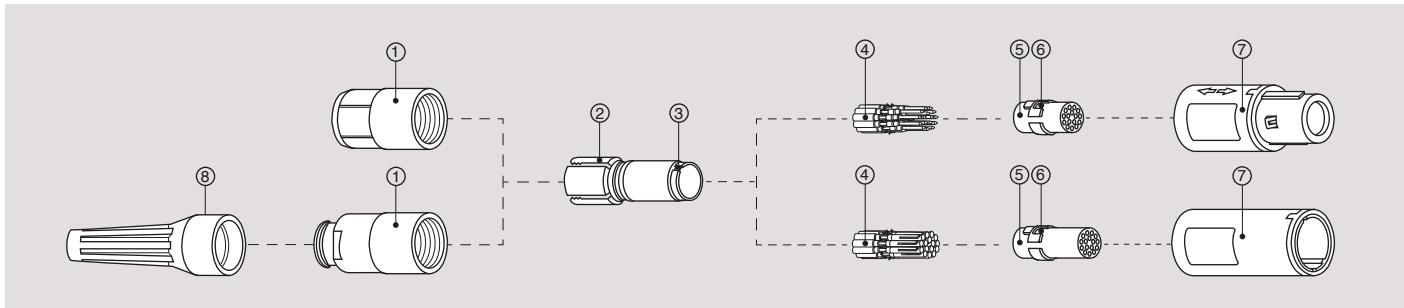Crimp contacts


1. Strip the cable according to the lengths given in the table.

Configuration	Dimensions (mm)	
	L	T
M02, M03	21.0	5.5
M04, M05, M06, M07, M08, M10, M12, M16, M19	21.0	4.0

2. Slide the collet nut ① and then the collet ② onto the cable. Slide the bend relief ⑧ (if ordered separately) onto the cable.

3. Fix the appropriate positioner (table page 46) in the crimping tool. Set selector to the number corresponding to the conductor AWG as indicated on the positioner label.

Fit conductor into contact ④ and make sure it is visible through the inspection hole in the crimp barrel. Slide conductor-contact combination into the open crimping tool; make sure that the contact is fully pushed into the positioner. Close the tool. Remove from crimping tool and check that conductor is secure in contact and shows in inspection hole.

4. Now arrange contact-conductor combinations according to the insert marking and locate them into the insert ⑥. Check that all contacts are correctly located and remain in position when given a gentle pull.

5. Slide the collet ② forward and locate slot ③ in the key of the insulator ⑤. Slide collet nut ① over collet ② and then push the whole assembly into the shell ⑦ whilst positioning it to ensure that the slot ⑥ of insulator ⑤ locates in the inside key of the shell. Tighten the collet nut ① to the maximum torque of 0.5 Nm. Push the bend relief ⑧ (if ordered separately) onto the collet nut ①.





For PSU only:

We recommend the use of Vibra-tite VC-6, Araldite CW2243 + Aradur HY 2966, Ablestik FDA2 Trapax or ThreeBond 1401 to secure the connector collet nut. The use of other materials could result in damage to the connector. The only recommended chemical cleaner is Isopropyl Alcohol.

► Assembly instructions for high voltage configurations

For H02, H05 and H08 configurations (not applicable for 2P PFA models)

Solder contacts

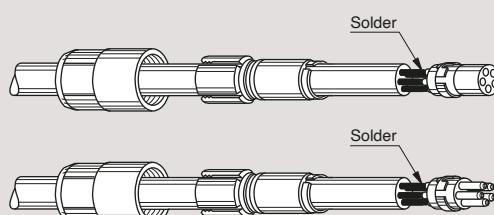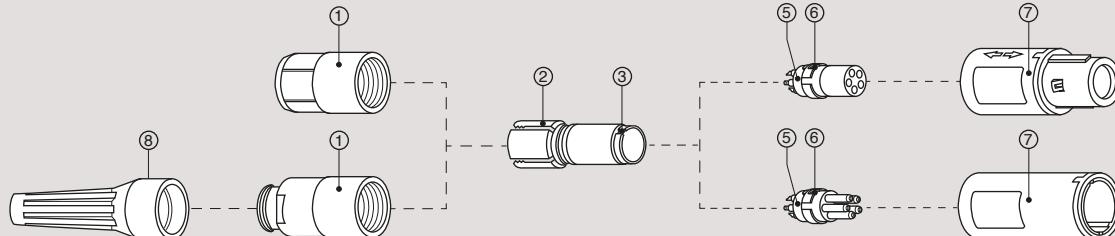

1. Strip the cable according to the lengths given in the drawing. Tin the conductors.

*** For insert configurations H02, H05 and H08:**

The use of potting type Epoxy* or / and adhesive-lined (strongly recommended) heatshrink tubes (not provided with the connector) over each termination is necessary to achieve the indicated Air Clearance and Creepage distance values as well as the indicated Test voltage.

2. Slide the collet nut ① and then the collet ② onto the cable. Slide the bend relief ⑧ (if ordered separately) onto the cable.

Place the heatshrink sleeve ⑨ (not provided with the connector) over the wires.

3. Solder conductors into contacts, making sure that neither solder nor flux gets onto the insulator or cable insulation. Put the heatshrink sleeve ⑨ over the solder contacts and heat gently until it retracts.

4. Slide the collet ② forward and locate slot ③ in the key of the insulator ⑤.

Slide collet nut ① over collet ② and then push the whole assembly into the shell ⑦ whilst positioning it to ensure that the slot ⑥ of insulator ⑤ locates in the inside key of the shell. Tighten the collet nut ① to the maximum torque of 0.5 Nm.

Push the bend relief ⑧ (if ordered separately) onto the collet nut ①.

For PSU only:


We recommend the use of Vibra-tite VC-6, Araldite CW2243 + Aradur HY 2966, Ablestik FDA2 Trapax or ThreeBond 1401 to secure the connector collet nut. The use of other materials could result in damage to the connector. The only recommended chemical cleaner is Isopropyl Alcohol.

3P SERIES




► Exploded view of the REDEL 3P


Straight plug

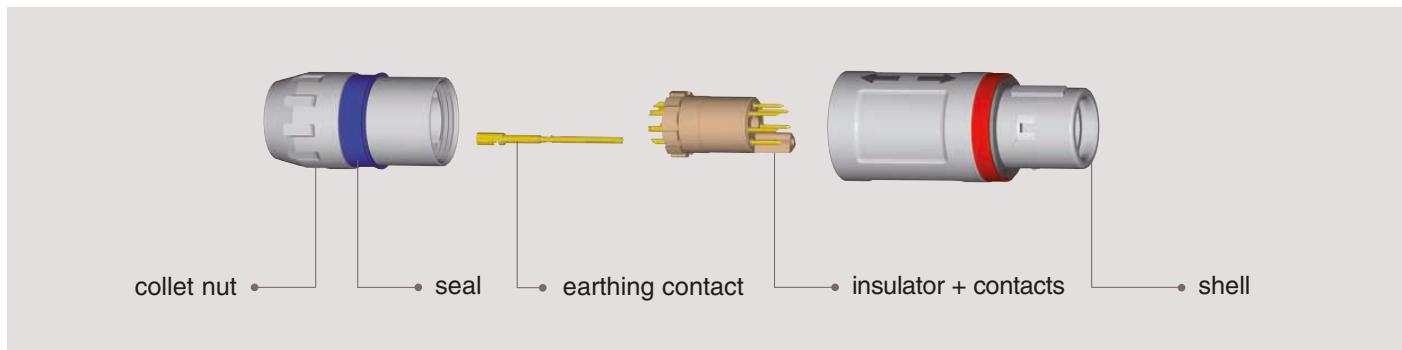

Fixed socket

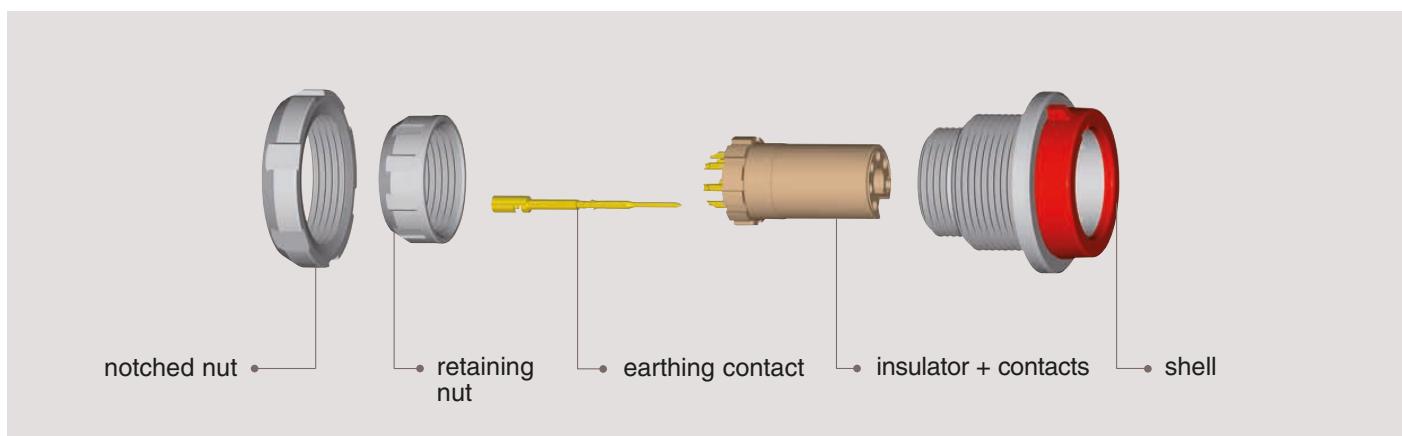

Fixed socket with square flange

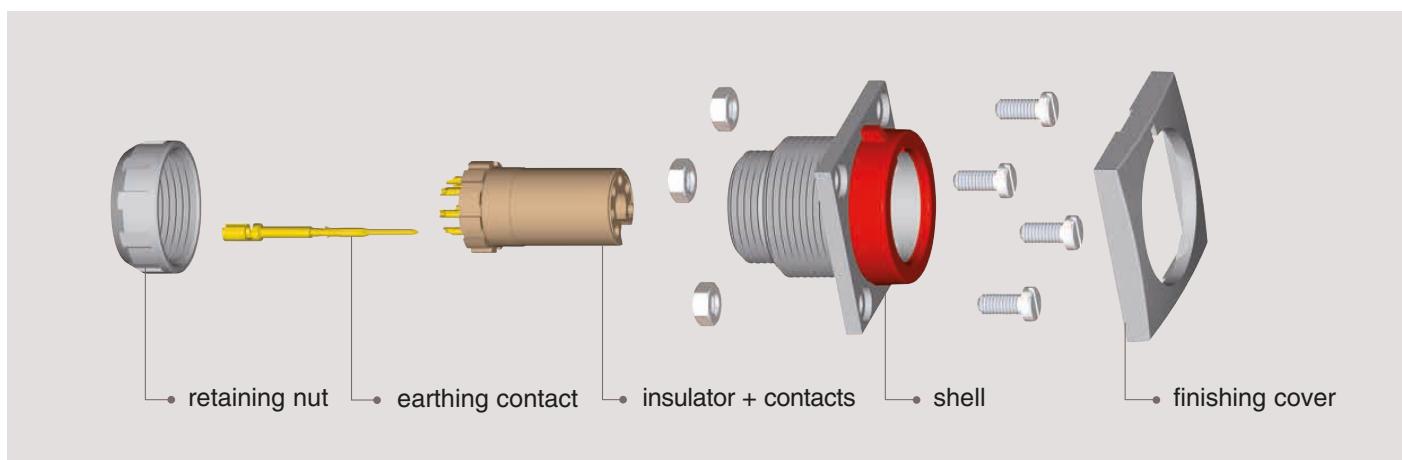

3P Series

The 3P series represents LEMO's first fully plastic connector line, designed to accommodate cable diameters of up to 9.5 mm. These connectors are available in 11 different contact configurations, including multi-contact, hybrid HV/electrical, coaxial/electrical, fiber optic/electrical, and fluidic options.

Specifically engineered for applications requiring minimal weight, maximum electrical insulation, and superior thermal and mechanical properties, the 3P series is ideal for all kinds of critical environments.

Constructed from non-conductive materials, these connectors provide exceptional safety and reliability. They feature four distinct systems to prevent accidental cross-mating: colour coding, housing keying, insert keying, and insert polarization.


Standard models

Straight plug




FGG

Fixed sockets




EGG

Free socket



EBG

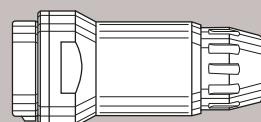

PHG


Alignment keys and insert polarization

The 3P series makes it possible for the user to configure his own keying system.

The insert can be located into 11 different angular positions relative to the external alignment key.


Note: the reference letter:

- on the plug insert, is placed to the left of the alignment key.
- on the socket insert, is placed to the right of the alignment key.

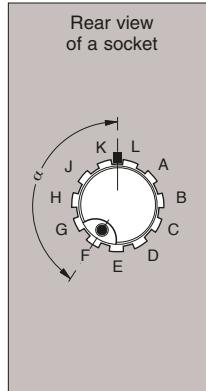

Insert code	Angle	
	Plug	Socket
A	180°	180°
B	147° 16'	212° 44'
C	114° 33'	245° 27'
D	81° 49'	278° 11'
E	49° 05'	310° 55'
F	16° 22'	343° 38'
G	343° 38'	16° 22'
H	310° 55'	49° 05'
J	278° 11'	81° 49'
K	245° 27'	114° 33'
L	212° 44'	147° 16'

Part numbering system

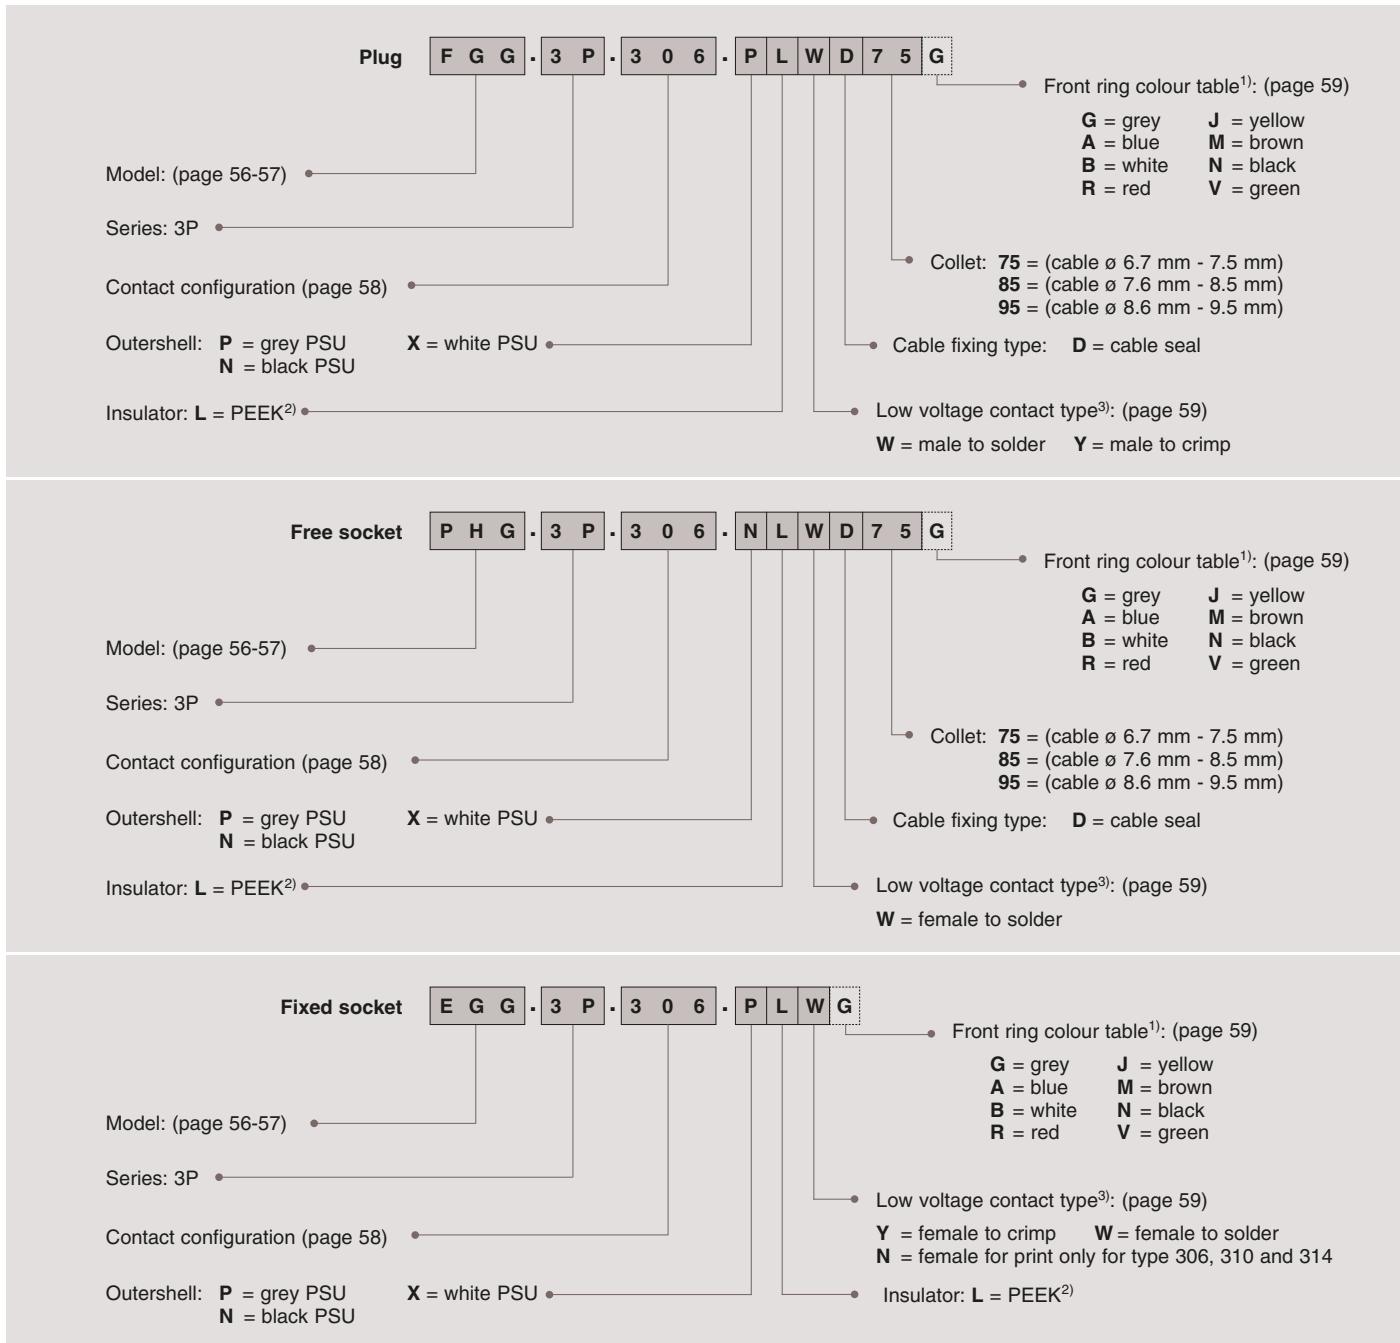

FGG.3P.306.PLWD75G Straight plug with key and cable seal, 3P series, multipole type with 6 contacts, outer shell in grey PSU, PEEK insulator, male solder contact, D type collet for 6.7 mm to 7.5 mm diameter cable and grey coloured ring.

PHG.3P.310.NLWD75G Free socket with key and cable seal, 3P series, multipole with 6 contacts, outer shell in black PSU, PEEK insulator, female solder contact, D type collet for 6.7 mm to 7.5 mm diameter cable and grey coloured ring.

EGG.3P.306.PLWG Fixed socket with key, 3P series, multipole type with 6 contacts, outer shell in grey PSU, PEEK insulator, female solder contact and grey coloured ring.

Note: 1) the variant position of the part number is used to specify the colour of the coloured ring. For grey PSU (material Code P).

2) for the high voltage type «709» use «J» enhanced PEEK material code. The standard colour is grey and nothing is mentioned in the variant position.

3) the letters W or Y are also used for special arrangements.



► Standard models (IP61)



Straight plug

Fixed socket

- 1 Outershell
- 2 Retaining nut
- 3 Round nut
- 4 Coloured ring
- 5 Insulator
- 6 Female contact
- 7 Male contact (earthing)

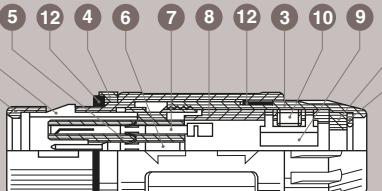

- 1 Outershell
- 2 Latch sleeve
- 3 Collet nut
- 4 Coloured ring
- 5 Insulator
- 6 Male contact
- 7 Female contact (earthing)
- 8 Clamping sleeve
- 9 Clamp
- 10 Screw
- 11 Washer
- 12 Seal

Characteristics	Value	Standards
Average retention force when pulling on the cable 1N = 0.102 kg	120 N	IEC 60512-8 test 15f
Cable retention force (depends on cable construction) 1N = 0.102 kg	100 - 200 N	IEC 60512-9 test 17c


Characteristics	Value	Standards
Endurance (latching)	> 3000 cycles	IEC 60512-5 test 9a
Working temperature range ¹⁾ (PSU)	-50/+150°C	–
Watertightness (mated)	IP61	IEC 60529

Note: 1) for the type hybrid LV + fibre optic, the temperature is: -40/+80°C


FGG Straight plug with key and cable seal



Part Number	Cable ø	
	min	max
FGG.3P.***.PLWD75G	6.7	7.5
FGG.3P.***.PLWD85G	7.6	8.5
FGG.3P.***.PLWD95G	8.6	9.5

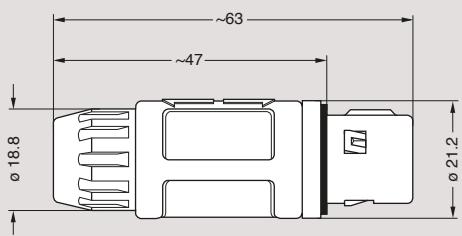

EGG Fixed socket with key, nut fixing

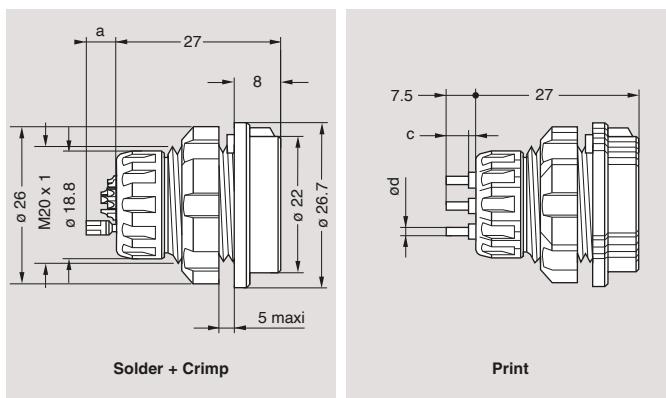

Part Number	number of contacts	Contact					
		Solder		Crimp		Print	
N	a max	N	a	c	ø d		
EGG.3P.306.PLWG	6+1LV	27	4.7	27	4.7	5.5	0.7
EGG.3P.310.PLWG	10+1LV	27	4.7	27	4.7	5.5	0.7
EGG.3P.314.PLWG	14+1LV	27	4.7	27	4.7	5.5	0.7
EGG.3P.318.PLWG	18+1LV	27	4.7	27	4.7	—	—


Note: for PCB drilling pattern see page 65.
Panel hole see page 65.

EBG Fixed socket with key, square flange and screw fixing




Part Number
EBG.3P.306.PLWG
EBG.3P.310.PLWG
EBG.3P.314.PLWG

Note: for PCB drilling pattern see page 65.
Panel hole see page 65.

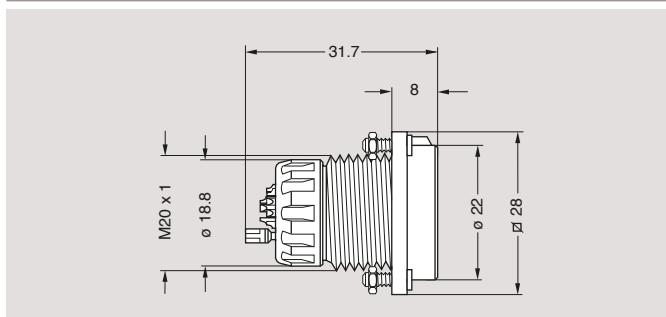

PHG Free socket with key and cable seal

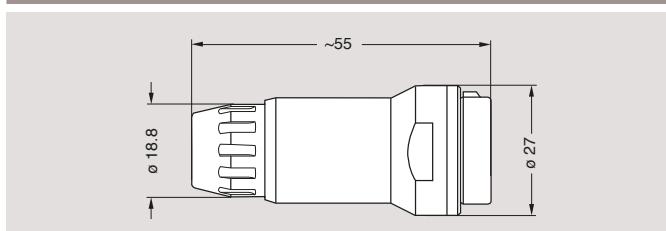

Part Number	Cable ø	
	min	max
PHG.3P.***.NLWD75N	6.7	7.5
PHG.3P.***.NLWD85N	7.6	8.5
PHG.3P.***.NLWD95N	8.6	9.5

Note: the picture shows outershell in black PSU.

 Insert configuration


Multipole, High voltage, Coaxial, Fibre optic, Fluidic

				Reference	Number of contacts	$\varnothing A$ (mm)	Solder bucket \varnothing (mm) ⁵⁾	Contact type			Test voltage (kV DC) Contact-contact	Air clearance min ²⁾ (mm)	Creepage distance min ³⁾ (mm)	Rated current (A)
								Solder	Crimp	Print (straight)				
Multipole				306	6+1LV	0.9	0.8	•	•	•	2.50	1.95	1.95	6.0
				310	10+1LV	0.9	0.8	•	•	•	2.20	1.25	1.25	5.0
				314	14+1LV	0.9	0.8	•	•	•	1.70	0.90	0.90	4.0
				318	18+1LV	0.7	0.6	•	—	—	1.20	0.70	0.70	3.0
H.V. Hybrid + LV				709	9+1LV 1HV	0.9	0.8	•	•	—	1.6 15.0	0.90	0.90	4.0
Coaxial Hybrid + LV				809	9+1LV 1Coax ⁶⁾	0.9	0.8	•	•	—	1.6 15.0	0.90	0.90	4.0
Fibre optic Hybrid + LV				92H	9+1LV 1FO ⁴⁾	0.9	0.8	•	•	—	1.6 15.0	0.90	0.90	4.0
				92K	11+1LV 1FO ⁴⁾	0.7	0.6	•	—	—	1.20	0.75	0.75	3.0
				96H	9+1LV 1FO ⁴⁾	0.9	0.8	•	•	—	1.6 15.0	0.90	0.90	4.0
				96K	11+1LV 1FO ⁴⁾	0.7	0.6	•	—	—	1.20	0.75	0.75	3.0
Fluidic Hybrid + LV				033	3 Fluid. + 3LV	0.9	—	—	•	—	4.24	1.45	1.45	9.0

Note: 1) depending on specific application and related standard, more restrictive operating voltage may apply, see page 68.

2) shortest distance in air between two conductive parts.

3) shortest distance along the surface of the insulating material between two conductive parts.

4) fibre optic contact must be ordered separately (see page 61). **F2 contact for 92H/92K and F1 contact for 96H/96K**.

5) for a given AWG, the diameter of some stranded conductor design is larger than the solder cup diameter (see page 69).

6) configuration 809 use «C» type coaxial contact.

► Contact type

. 3 P. .

Select the type of contact: solder or crimp?

Plug	Type	Male
	solder	W
	crimp	Y

Socket	Type	Female
	solder	W
	crimp	Y
	print	N

When should I use crimp rather than solder contacts ?

Soldering

- recommended for small volumes
- requires little amount of tooling (soldering iron)
- requires more time

Crimping

- recommended for large volumes
- no heat is required to make the connection
- for contacts with high density
- for use in high temperature environment
- requires extra tooling (crimping tools)

► Colour coding

. 3 P. .

Reference	Colours							
	grey	blue	yellow	black	red	green	brown	white
	G	A	J	N	R	V	M	B
RAL code	7001	5002	1016	9005	3020	6024	8002	9003

Note: the RAL colours are indicative and depend on raw material and production process. Colour may differ.

Easy identification with the assistance of colour coding. Outershell is only available in grey, black or white (see page 55).

► Accessories

FGG-EGG Insulator for crimp contacts



male



female


Contact configuration	Insulator part number	
	For plug	For socket
306	FGG.3P.306.ML	EGG.3P.406.ML
310	FGG.3P.310.ML	EGG.3P.410.ML
314	FGG.3P.314.ML	EGG.3P.414.ML

FGG-EGG Crimp contacts, kit with the number of contacts in a tube




Contact configuration	ø A (mm)	ø C (mm)	Contact part number	
	Male	Female		
306	0.9	1.1	FGG.3P.306.ZZYT	EGG.3P.306.ZZYT
310	0.9	1.1	FGG.3P.310.ZZYT	EGG.3P.310.ZZYT
314	0.9	1.1	FGG.3P.314.ZZYT	EGG.3P.314.ZZYT

FGG-EGG Earthing contacts

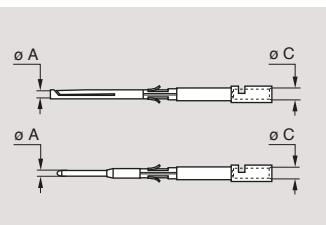



Type	ø A (mm)	ø C (mm)	Contact part number	
	Male	Female		
306 - 310	0.9	2.0	FGG.3P.561.ZZY	EGG.3P.661.ZZY
314 - 318	0.9	2.0	FGG.3P.561.ZZY	EGG.3P.661.ZZY
709 - 809	0.9	2.0	FGG.3P.561.ZZY	EGG.3P.661.ZZY
96H - 92H	0.9	2.0	FGG.3P.561.ZZY	EGG.3P.661.ZZY
96K - 92K	0.9	2.0	FGG.3P.561.ZZY	EGG.3P.661.ZZY

GEB Plastic nut

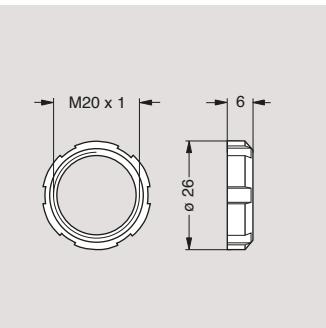

Part Number	Mat.	Colours
GEB.3P.240.UB	PSU	white
GEB.3P.240.UG	PSU	grey
GEB.3P.240.UN	PSU	black


EBG Finishing cover

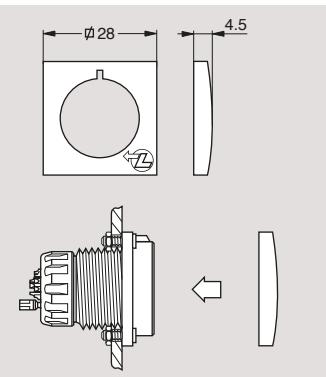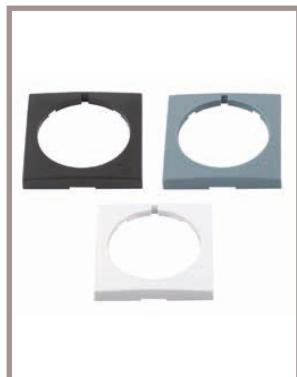

Part Number	Mat.	Colours
EBG.3P.260.UB	PSU	white
EBG.3P.260.UG	PSU	grey
EBG.3P.260.UN	PSU	black

Note: a finishing cover is supplied with all EBG fixed sockets with a square flange. Models EBG sockets, with a square flange, can also be mounted without using the fixing screws.

Note: all dimensions are in millimeters

GMA Bend relief


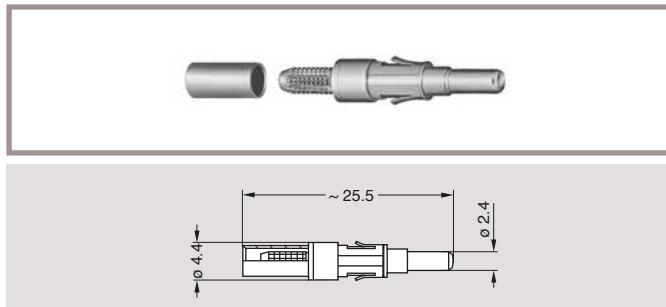
Part Number	Cut	Cable \varnothing (mm)	
		min.	max.
GMA.3P.050.SN	–	3.0	3.9
	A	4.0	4.9
	B	5.0	5.9
	C	6.0	7.0

Material: Black thermoplastic rubber

Note: the cable entry of the FGG plugs can be fitted with a flexible bend relief which can accommodate cables of 3 to 7 mm in diameter. The adjustment to the diameter is done by cutting the conical end. The bend relief is mounted inside the nut. The cable must have a sheath with a large enough diameter in order to be held by the clamping system.


Fibre optic contact

For the hybrid type LV + fibre optic, fibre optic contacts must be ordered separately.

FFS.F1 Male F1 Fibre Optic Contact for plug


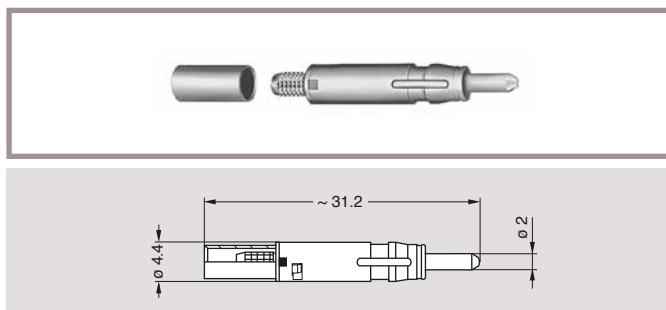
Reference	Ferrule inside \varnothing (μm)	Fibre type
FFS.F1.GB1.ACE30	235	HCS
FFS.F1.HB1.AAE30	335	HCS
FFS.F1.JB1.AAE30	435	HCS
FFS.F1.KB1.AAE30	640	HCS
FFS.F1.RB1.AAE30	1100	Polymer

Note: other ferrule inside diameter, consult us.

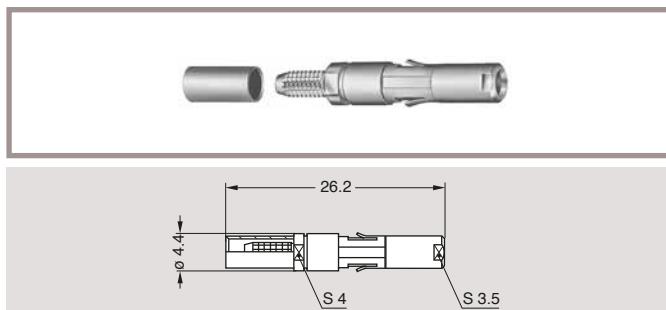PSS.F1 Female F1 Fibre Optic Contact for socket


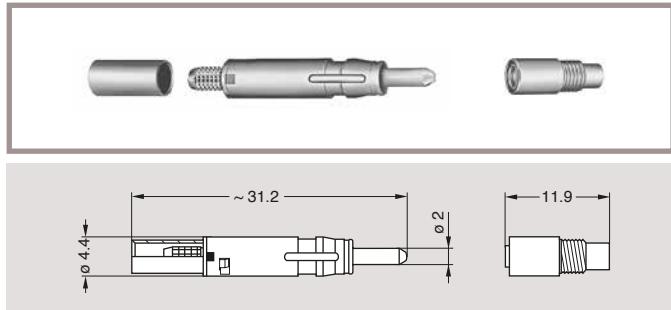
Reference	Ferrule inside \varnothing (μm)	Fibre type
PSS.F1.GB1.ACE30	235	HCS
PSS.F1.HB1.AAE30	335	HCS
PSS.F1.JB1.AAE30	435	HCS
PSS.F1.KB1.AAE30	640	HCS
PSS.F1.RB1.AAE30	1100	Polymer

Note: other ferrule inside diameter, consult us.

FFS.F2 Male F2 Fibre Optic Contact for plug


Reference	Ferrule inside \varnothing (μm)	Fibre type
FFS.F2.BA2.LCE30	125	9/125
FFS.F2.BB2.LCE30	126	9/125
FFS.F2.BD2.LCE30	128	50/125
FFS.F2.BD2.LCE30	128	62.5/125
FFS.F2.FB2.LCE30	144	100/40

Note: all dimensions are in millimeters.

PSS.F2 Female F2 Fibre Optic Contact for socket


Reference	Ferrule inside ø (µm)	Fibre type
PSS.F2.BA2.LCE30	125	9/125
PSS.F2.BB2.LCE30	126	9/125
PSS.F2.BD2.LCE30	128	50/125
PSS.F2.BD2.LCE30	128	62.5/125
PSS.F2.FB2.LCE30	144	100/40


Note: all dimensions are in millimeters.


► Recommended coaxial cables

Group ¹⁾			Type
1	2	3	
•			RG.174A/U
	•		RG.178B/U
		•	RG.179B/U
		•	RG.187A/U
•			RG.188A/U
	•		RG.196A/U
•			RG.316/U

Note: 1) the cable group number corresponding to the cable must be written in the variant position of the part number (see page 55).

► Tooling

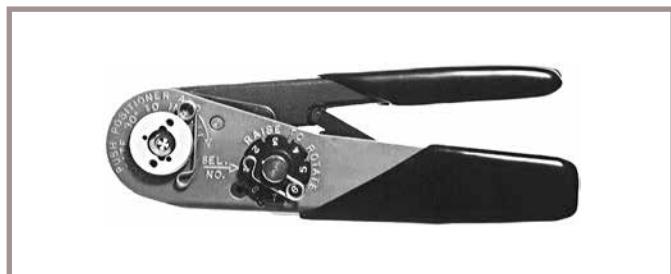
DPC.91.701.V Crimping tool

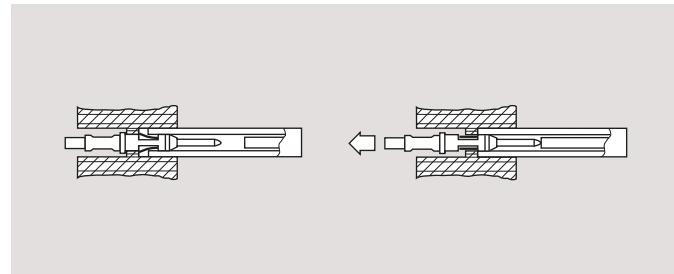DCE Positioners for crimp contacts

DCC Manual extractor for crimp contacts


Contact type	Contact ø (mm)	Conductor AWG	Positioner part number		Selector No Setting	Part number extractor
			Male	Female		
306	0.9	20-22-24	DCE.91.093.PVC	DCE.91.093.PVM	6-5-5	DCC.09.05B.LAG
310	0.9	20-22-24	DCE.91.093.PVC	DCE.91.093.PVM	6-5-5	DCC.09.05B.LAG
314	0.9	20-22-24	DCE.91.093.PVC	DCE.91.093.PVM	6-5-5	DCC.09.05B.LAG

Note: this model is used for male and female contacts.

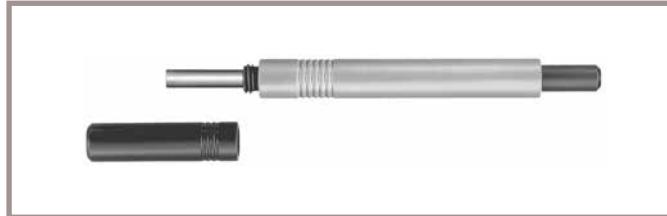
The variance in conductor stranding diameter for the minimum AWG is such that some can have a cross section which is not sufficient to guarantee crimping as per IEC 60352-2 standard. All dimensions are in millimeters.

DCC Manual extractor for coax contact type «C»


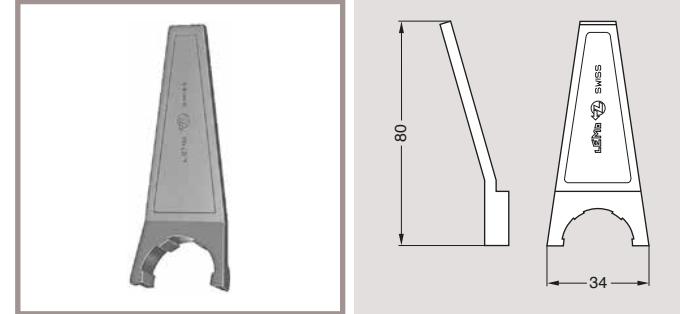
Part Number	Contact type
DCC.91.CP1.LAG	809

DPE Crimping tool for coax contact type «C»


Part Number	Cable group
DPE.99.103.8K	1-3
DPE.99.103.1K	2

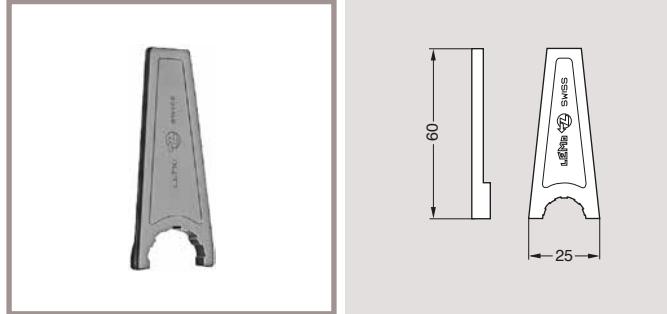DCP.91.019.HN Spanners with notch for securing the collet nut


Material: Black polyamide

DCP.91.026.HN Spanners for securing the socket nut


Material: Black polyamide

DCS Polishing tool for fibre optic contact


Part Number	Contact type
DCS.91.F24.LC	F2
DCS.91.F13.LC	F1

Note: all dimensions are in millimeters.

DRV.91.CF2.PN F2 contact fibre optic work station


DPE.99.524.337K Crimp tool for fibre optic contact F1 and F2 type



DCS Microscope adaptor for fibre optic contact



Part Number	Contact type
DCS.91.G90.6E200	F2
DCS.91.G90.6E240	F1


WST.FB.G00.301 Fibre inspection microscope



DCS.F2.035.PN F2 contact alignment device installation/extraction tool



DCC.91.F12.LAG Manual extractor for fibre optic contact F1 and F2 type

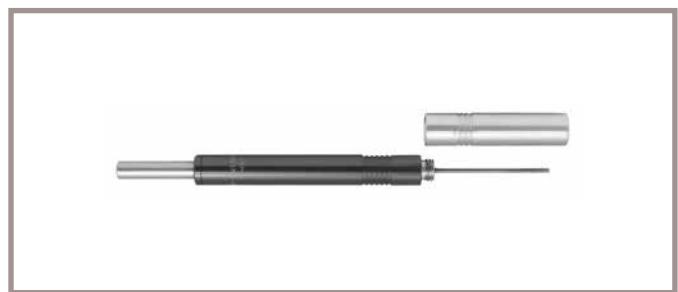

WST Epoxy curing oven for fibre optic contact




Part Number	Voltage
WST.FR.220.VA	220 volts
WST.FR.110.VA	110 volts

DCS.91.F23.LA Cleaning tool for F2 contact




► Panel hole

For EGG

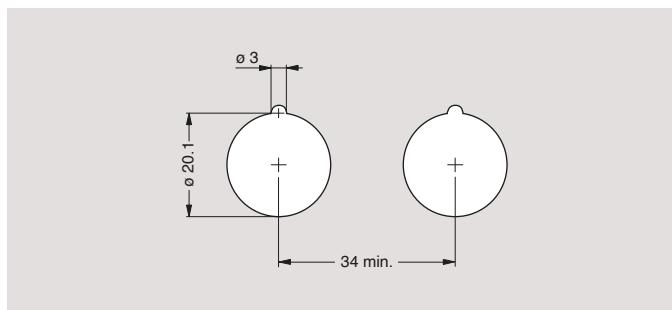


For EBG

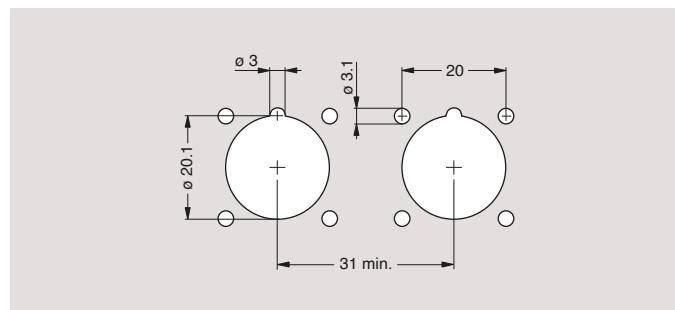


► PCB drilling pattern

For straight contacts

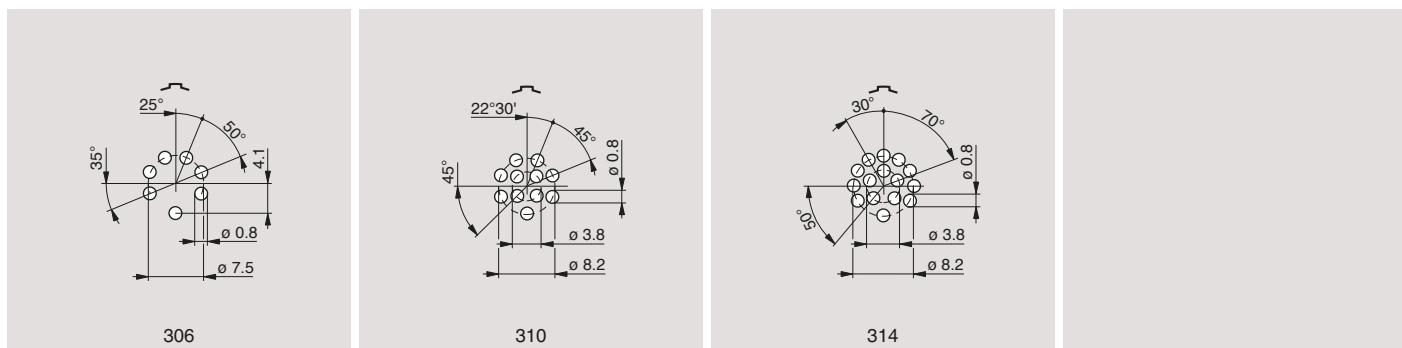


► Assembly instructions

Solder LV contacts

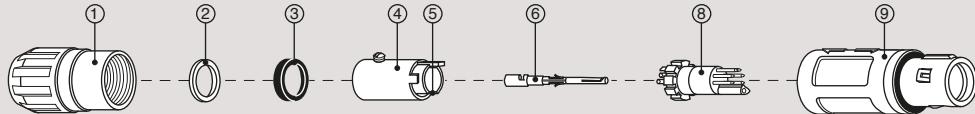


1. Strip the cable according to the lengths given in the table. Tin the conductors. In case of a screened cable separate the braid and twist it apart as shown.


Configuration	Dimensions (mm)	
	L	T
306 - 310	13.0	3.0
314 - 318	13.0	3.0




2. Slide the collet nut ①, the washer ②, the seal ③ and the clamping sleeve ④. In case of a screened cable solder the braid into the earthing contact ⑥.

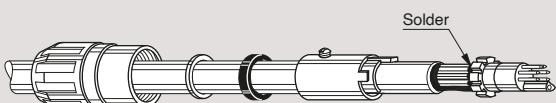

3. In case of a screened cable introduce the earthing contact ⑥ into the insert ⑧. Check that contact is correctly located and remains in position when given a gentle pull. Solder conductors into contacts, making sure that neither solder nor flux gets onto the insulator or cable insulation.



4. Slide the clamping sleeve ④ forward and locate tag ⑤ into one of the insulator slot according to the selected polarization code. Make sure that same code is used for plug and socket. Tight the screw of the clamping sleeve ④ to secure the cable. Slide washer and seal against clamping sleeve.




5. Push the whole assembly into the shell ⑨ whilst turning it to insure that the tag ⑤ is correctly located in the inside slot of the shell. Tighten the collet nut ① to the maximum torque of 1.2 Nm.

– Socket mounting nut or screws = 2.3 Nm.


For PSU only:

We recommend the use of Vibra-tite VC-6, Araldite CW2243 + Aradur HY 2966, Ablestik FDA2 Trapax or ThreeBond 1401 to secure the connector collet nut. The use of other materials could result in damage to the connector. The only recommended chemical cleaner is Isopropyl Alcohol.

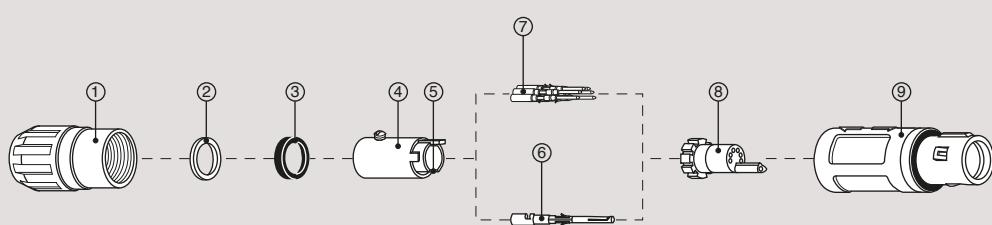Crimp LV contacts


1. Strip the cable according to the lengths given in the table. Tin the conductors. In case of a screened cable separate the braid and twist it apart as shown.

Configuration	Dimensions (mm)	
	L	T
306, 310, 314	19.0	5.4




2. Slide the collet nut ①, the washer ②, the seal ③ and the clamping sleeve ④.


In case of a screened cable solder the braid into the earthing contact ⑥.

3. Fix the appropriate positioner (table page 62) in the crimping tool. Set selector to the number corresponding to the conductor AWG as indicated on the positioner label.

Fit conductor into contact ⑦ and make sure it is visible through the inspection hole in the crimp barrel. Slide conductor-contact combination into the open crimping tool; make sure that the contact is fully pushed into the positioner. Close the tool. Remove from crimping tool and check that conductor is secure in contact and shows in inspection hole.

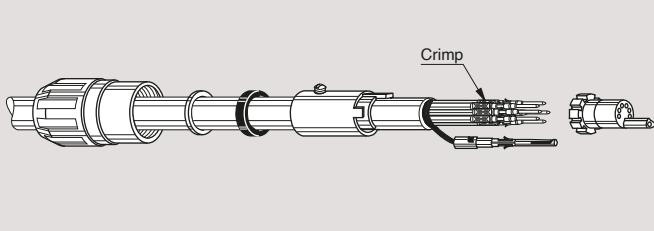


4. Now arrange contact-conductor combinations according to the insert marking and locate them into the insert ⑤. Check that all contacts are correctly located and remain in position when given a gentle pull. In case of a screened cable introduce the earthing contact ⑥ into the insert ⑧. Check that contact is correctly located and remains in position when given a gentle pull.



5. Slide the clamping sleeve ④ forward and locate tag ⑥ into one of the insulator slot according to the selected polarization code. Make sure that same code is used for plug and socket.

Tight the screw of the clamping sleeve ④ to secure the cable. Slide washer and seal against clamping sleeve.




6. Push the whole assembly into the shell ⑨ whilst turning it to insure that the tag ⑥ is correctly located in the inside slot of the shell. Tighten the collet nut ① to the maximum torque of 1.2 Nm.


– Socket mounting nut or screws = 2.3 Nm.

For PSU only:

We recommend the use of Vibra-tite VC-6, Araldite CW2243 + Aradur HY 2966, Ablestik FDA2 Trapax or ThreeBond 1401 to secure the connector collet nut. The use of other materials could result in damage to the connector. The only recommended chemical cleaner is Isopropyl Alcohol.



Mechanical latching characteristics

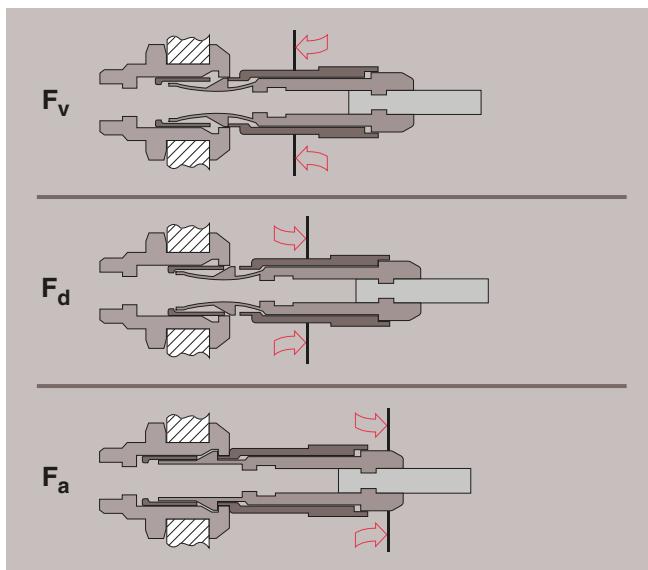

F_v : average latching force

F_d : average unmating force with axial pull on the outer release sleeve

F_a : average retention force for straight pull on the collet nut

Contact resistance with relation to the number of mating cycles

(measured according to IEC 60512-2 test 2a)

Average values measured after the mating cycles and the salt spray test according to IEC 60512-6 test 11f.

A Ø (mm)	Contact resistance (mΩ)	Multipole
	1000 cycles	
0.5	< 8.5	
0.7	< 6.5	
0.9	< 4.5	
1.3	< 2.8	
1.6	< 2.9	
2.0	< 2.6	

Note: 1) 21 days at 95% RH according to IEC 60068-2-3.

Test voltage

Test voltage (U_e):

(measured according to the IEC 60512-2 test 4a standard)

It corresponds to 75% of the mean breakdown voltage.

Test voltage is applied at 500 V/s and the test duration is 1 minute.

This test has been carried out with a mated plug and socket, with power supply only on the plug end.

The operating voltage value definition is at the entire responsibility of the customer who defines this value according to the safety factors that they apply to their equipment and system.

Caution:

For a number of applications, safety requirements for electrical appliances are more severe with regard to operating voltage.

In such cases operating voltage is defined according to creepage distance and air clearance between live parts. Please consult us for the choice of a connector by indicating the safety standard to be met by the product.

PSU shell material

Force (N)	Series		
	1P	2P	3P
F_v	8.0	5.5	7.5
F_d	8.0	8.5	17.0
F_a	100	150	120

PEI shell material

Force (N)	Series	
	1P	2P
F_v	6.5	6.0
F_d	6.5	9.0
F_a	120	100

Notes: 1N = 0.102 kg.
Mechanical endurance: 1000 cycles.

Notes: The forces were measured on PSU outer shells not fitted with contacts. The mechanical endurance represents the number of cycles after which the latching system is still effective (1 cycle = 1 latching/unlatching – 300 cycles per hour). The values were measured according to the standard IEC 60512-7, test 13a. 2P, for standard models only.

Insulation resistance between the contacts and contact/shell

(measured according to IEC 60512-2 test 3a)

Insulating material	Multipole
	PEEK
new	$> 10^{12} \Omega$
after humidity test ¹⁾	$> 10^{10} \Omega$

► Technical tables

Table of American Wire Gauge

AWG	Construction		ø wire max		Wire section	
	Strand nb	AWG/strand	(mm)	(in)	(mm ²)	(sq in)
0	259	24	11.277	0.444	52.90	0.0820
1	817	30	9.702	0.382	41.40	0.0641
2	259	26	8.89	0.35	33.20	0.0514
4	133	25	6.9596	0.274	21.5925	0.0335
6	133	27	5.5118	0.217	13.5885	0.0211
8	168	30	4.4450	0.175	8.5127	0.0132
8	133	29	4.3942	0.173	8.6053	0.0133
10	105	30	3.3020	0.13	5.3204	0.0082
10	37	26	2.9210	0.115	4.7397	0.0073
10	1	10	2.6162	0.103	5.2614	0.0082
12	37	28	2.3114	0.091	2.9765	0.0046
12	19	25	2.3622	0.093	3.0847	0.0048
12 ¹⁾	7	20	2.5400	0.10	3.6321	0.0056
12	1	12	2.0828	0.082	3.3081	0.0051
14	41	30	2.0574	0.081	2.0775	0.0032
14	19	27	1.8542	0.073	1.9413	0.0030
14 ¹⁾	7	22	2.0828	0.082	2.2704	0.0035
14	1	14	1.6510	0.065	2.0820	0.0032
16 ¹⁾	65	34	1.5748	0.062	1.3072	0.0020
16	26	30	1.5748	0.062	1.3174	0.0020
16	19	29	1.4986	0.059	1.2293	0.0019
16 ¹⁾	7	24	1.5494	0.061	1.4330	0.0022
16	1	16	1.3208	0.052	1.3076	0.0020
18 ¹⁾	65	36	1.2700	0.05	0.8234	0.0013
18 ¹⁾	42	34	1.2700	0.05	0.8447	0.0013
18	19	30	1.3208	0.052	0.9627	0.0015
18	16	30	1.2954	0.051	0.8107	0.0013
18	7	26	1.2700	0.05	0.8967	0.0014
18	1	18	1.0414	0.041	0.8229	0.0013
20 ¹⁾	42	36	1.0160	0.04	0.5320	8.2x10 ⁻⁴
20	19	32	1.0414	0.041	0.6162	0.0010
20	10	30	1.0160	0.04	0.5067	7.9x10 ⁻⁴
20	7	28	0.9906	0.039	0.5631	8.7x10 ⁻⁴
20	1	20	0.8382	0.033	0.5189	8.0x10 ⁻⁴
22	19	34	0.8382	0.033	0.3821	5.9x10 ⁻⁴
22	7	30	0.7874	0.031	0.3547	5.5x10 ⁻⁴
22	1	22	0.6604	0.026	0.3243	5.0x10 ⁻⁴
24 ¹⁾	42	40	0.6604	0.026	0.2045	3.2x10 ⁻⁴
24	19	36	0.6858	0.027	0.2407	3.7x10 ⁻⁴
24	7	32	0.6350	0.025	0.2270	3.5x10 ⁻⁴
24	1	24	0.5588	0.022	0.2047	3.2x10 ⁻⁴
26	19	38	0.5588	0.022	0.1540	2.4x10 ⁻⁴
26	7	34	0.5080	0.02	0.1408	2.2x10 ⁻⁴
26	1	26	0.4318	0.017	0.1281	2.0x10 ⁻⁴
28 ¹⁾	19	40	0.4318	0.017	0.0925	1.4x10 ⁻⁴
28	7	36	0.4064	0.016	0.0887	1.4x10 ⁻⁴
28	1	28	0.3302	0.013	0.0804	1.2x10 ⁻⁴
30	7	38	0.3302	0.013	0.0568	8.8x10 ⁻⁵
30	1	30	0.2794	0.011	0.0507	7.9x10 ⁻⁵
32	7	40	0.2794	0.011	0.0341	5.3x10 ⁻⁵
32	1	32	0.2286	0.009	0.0324	5.0x10 ⁻⁵
34	1	34	0.1693	0.007	0.0201	3.1x10 ⁻⁵
36	1	36	0.127	0.005	0.0127	2.0x10 ⁻⁵
38	1	38	0.1016	0.004	0.0081	1.3x10 ⁻⁵
40	1	40	0.078	0.003	0.0049	7.5x10 ⁻⁶

Table of wire gauges according to IEC-60228 standard

Conductor no x Ø (mm)	Max Ø (mm)	Max Ø (in)	Section (mm ²)	Section (sq in)
196x0.40	7.50	0.295	25.00	0.0387
7x2.14	6.10	0.240	25.00	0.0387
125x0.40	6.00	0.236	16.00	0.0248
7x1.72	4.90	0.192	16.00	0.0248
1x4.50	4.50	0.177	16.00	0.0248
80x0.40	4.70	0.155	10.00	0.0155
7x1.38	3.95	0.155	10.00	0.0155
1x3.60	3.60	0.141	10.00	0.0155
84x0.30	3.70	0.145	6.00	0.0093
7x1.50	3.15	0.124	6.00	0.0093
1x2.76	2.76	0.108	6.00	0.0093
56x0.30	2.80	0.110	4.00	0.0062
7x0.86	2.58	0.098	4.00	0.0062
1x2.25	2.25	0.082	4.00	0.0062
50x0.25	2.15	0.084	2.50	0.0038
7x0.68	2.04	0.080	2.50	0.0038
1x1.78	1.78	0.070	2.50	0.0038
30x0.25	1.60	0.062	1.50	0.0023
7x0.52	1.56	0.061	1.50	0.0023
1x1.4	1.40	0.055	1.50	0.0023
32x0.20	1.35	0.053	1.00	0.0015
7x0.43	1.29	0.050	1.00	0.0015
1x1.15	1.15	0.045	1.00	0.0015
42x0.15	1.20	0.047	0.75	0.0011
28x0.20	1.15	0.045	0.75	0.0011
1x1.0	1.00	0.039	0.75	0.0011
28x0.15	0.95	0.037	0.50	7.7x10 ⁻⁴
16x0.20	0.90	0.035	0.50	7.7x10 ⁻⁴
1x0.80	0.80	0.031	0.50	7.7x10 ⁻⁴
7x0.25	0.75	0.029	0.34	5.2x10 ⁻⁴
1x0.60	0.60	0.023	0.28	4.3x10 ⁻⁴
14x0.15	0.75	0.029	0.25	3.8x10 ⁻⁴
7x0.20	0.65	0.023	0.22	3.4x10 ⁻⁴
18x0.10	0.50	0.019	0.14	2.1x10 ⁻⁴
14x0.10	0.40	0.015	0.11	1.7x10 ⁻⁴
21x0.07	0.40	0.015	0.09	1.3x10 ⁻⁴
14x0.10	0.40	0.015	0.09	1.3x10 ⁻⁴

Note: 1) not included in the standard

Notes:

Notes:

Notes:

► Product safety notice & Disclaimers

PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY AND CONSULT ALL RELEVANT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION.
IMPROPER HANDLING, CABLE ASSEMBLY, OR WRONG USE OF CONNECTORS CAN RESULT IN HAZARDOUS SITUATIONS.

1. SHOCK AND FIRE HAZARD

Incorrect wiring, the use of damaged components, presence of foreign objects (such as metal debris), and / or residue (such as cleaning fluids), can result in short circuits, overheating, and / or risk of electric shock.
Mated components should never be disconnected while live as this may result in an exposed electric arc and local overheating, resulting in possible damage to components.

2. HANDLING

Connectors and their components should be visually inspected for damage prior to installation and assembly. Suspect components should be rejected or returned to the factory for verification.
Connector assembly and installation should only be carried out by properly trained personnel. Proper tools must be used during installation and / or assembly in order to obtain safe and reliable performance.

3. USE

Connectors with exposed contacts should never be live (or on the current supply side of a circuit). Under general conditions voltages above 30 VAC and 42 VDC are considered hazardous and proper measures should be taken to eliminate all risk of transmission of such voltages to any exposed metal part of the connector.

4. TEST AND OPERATING VOLTAGES

The maximum admissible operating voltage depends upon the national or international standards in force for the application in question. Air and creepage distances impact the operating voltage; reference values are indicated in the catalogue however these may be influenced by PC board design and / or wiring harnesses.

The test voltage indicated in the catalogue is 75% of the mean breakdown voltage; the test is applied at 500 V/s and the test duration is 1 minute.

5. CE MARKING

CE marking  means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives. CE marking  applies to complete products or equipment, **but not to electromechanical components, such as connectors.**

6. PRODUCT IMPROVEMENTS

The LEMO Group reserves the right to modify and improve to our products or specifications without providing prior notification.

7. WARNING (Prop 65 State of California)

Proposition 65 requires businesses to provide warnings to Californians about significant exposures to chemicals that cause cancer, birth defects or other reproductive harm. LEMO products are exempt from proposition 65 warnings because they are manufactured, marketed, and sold solely for commercial and industrial use.

For further information, please visit: <https://web.lemo.com/img/resources/quality/LEMO-Prop-65-compliance-declaration.pdf>

8. UL RECOGNITION

LEMO connectors are components recognized by the Underwriters Laboratories (UL), facilitating the UL approval of the complete system (including LEMO connector, cable and your equipment).

9. REACH AND ROHS

LEMO connector specifications comply with the requirements of the RoHS directive (2011/65/EU) and REACH regulation (1907/2006/EU) of the European Parliament and latest amendments. These REACH and ROHS regulations specify the restrictions of the use of hazardous substances in LEMO products marketed in Europe.

DISCLAIMERS

LEMO works constantly to improve the quality of its products; the information and illustrations figuring in this document may therefore vary and are not binding. In any case, LEMO makes no specific warranty of merchantability, fitness for a particular purpose, third party components as such or included in assembly, non-infringement, title, accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO component.

In no event shall LEMO, its affiliates, officers, agents or employees be liable for any incidental, indirect, special or consequential damages in connection with the products or services provided by LEMO, including (without limitation) loss of profits or revenues, interruption of business, loss of use of the products or any associated equipment, materials, components or products, damages to associated equipment or in combination with other components, materials.

Reproduction of significant portions of LEMO information in LEMO data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. LEMO is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.



HEADQUARTERS
Switzerland

LEMO SA
Tel: +41 21 695 16 00
info@lemo.com

Subsidiaries & distributors



Online catalogue



lemo.com

