



LFM420S SERIES 420 WATT AC-DC POWER SUPPLY WITH PFC

Features

- Universal Input Range 85~264Vac
- High Efficiency up to 94.5%
- Class I
- 25.4mm Low Profile Package
- No Load Input Power Consumption <0.5W
- No Load Input Power Consumption <0.6W for 54V
- Approval IEC/EN/UL 62368-1 Ed 3.0
- Approval EN55032 and CISPR/FCC Class B
- Meets IEC/EN 60335-1
- Operating Altitude 5000m
- Continuous Short Circuit Protection
- Over Voltage Protection
- Over Temperature Protection
- High Power Density 28.0 W/Inches³
- Active PFC Function
- Over Voltage Category OVC II & OVC III
- Constant Current



MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT			RIPPLE & NOISE NOTE1	VOLTAGE ACCURACY NOTE2	VOLTAGE ADJ. RANGE	LINE REGULATION NOTE3	LOAD REGULATION NOTE4	% EFF. (Typ.) NOTE5
		With Fan NOTE6	With Conduction Cooling NOTE7							
			Baseplate	Cover						
LFM420S120	12 V	35.00 A	26.25 A	29.17 A	120 mV	±1%	11.4-12.6 V	±0.5%	±1%	92.5%
LFM420S150	15 V	28.00 A	21.00 A	23.33 A	150 mV	±1%	14.25-15.75 V	±0.5%	±1%	93.0%
LFM420S240	24 V	17.50 A	13.13 A	14.58 A	240 mV	±1%	22.8-25.2 V	±0.5%	±1%	94.0%
LFM420S280	28 V	15.00 A	11.25 A	12.50 A	280 mV	±1%	28-29.4 V	±0.5%	±1%	94.0%
LFM420S300	30 V	14.00 A	10.50 A	11.67 A	300 mV	±1%	28.5-31.5 V	±0.5%	±1%	94.0%
LFM420S360	36 V	11.67 A	8.75 A	9.72 A	360 mV	±1%	34.2-37.8 V	±0.5%	±1%	94.0%
LFM420S480	48 V	8.75 A	6.56 A	7.29 A	480 mV	±1%	45.6-50.4 V	±0.5%	±1%	94.0%
LFM420S540	54 V	7.78 A	5.83 A	6.48 A	540 mV	±1%	51.3-55.0 V	±0.5%	±1%	94.5%

Note:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
2. Voltage accuracy is set at full load and 25°C Ta.
3. Line regulation is measured from high line to low line with rated load.
4. Load regulation is measured from full load to 10% rated load.
5. Typical efficiency at 230 Vac and full load at 25°C.
6. Forced air convection with 21.9CFM above 100V_{ac}.
7. Conduction convection with external baseplate, 24.8*48.0cm with min. 0.12cm thick @115V_{ac}.



LFM420S Series

PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type	Mounting Inserts
LFM420	O	XXX	X	-YZ
LFM420	S : Single	120 : 12V 150 : 15V 240 : 24V 280 : 28V 300 : 30V 360 : 36V 480 : 48V 540 : 54V	B : With Baseplate C : With Cover	Blank: Through Hole C0: Threaded Hole

Part Number Example:

LFM420S120C: With Cover, 420W, 12Vdc Output



LFM420S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	85		264	V_{ac}
	No safety approvals		120		370	V_{dc}
Operating Temperature	See derating curve	All	-40		80	°C
Operating Case Temperature	At the center of base plate (T_c = Case temperature)	All	-40		85	°C
Storage Temperature		All	-40		85	°C
Operating Altitude	IEC/EN/UL 62368 OVC II	All			5000	m
	IEC/EN/UL 62368 OVC III				2000	m

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	V_{ac}
Input Frequency Range	No safety approvals. Some specifications are not meet, such as Leakage Current and No Load Input Power Consumption	All	47		63	Hz
				400		
Maximum Input Current	100% Load, $V_{in}=100V_{ac}$	All			6	A
Leakage Current	@47-63Hz	All			0.3	mA
Inrush Current	$V_{in}=240V_{ac}$, Cold start at 25°C	All		30		A
Under Voltage Protection		All	65		75	V_{ac}
Power Factor	115 V_{ac} @ Full load, 47-63Hz	All		0.98		
	230 V_{ac} @ Full load, 47-63Hz			0.95		
	115 V_{ac} @ Full load, 400Hz Input Frequency 400HZ No safety approvals			0.93		

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V_{in} =Nominal V_{in} , I_o = I_o max., T_c =25°C	LFM420S120	11.88	12	12.12	V_{dc}
		LFM420S150	14.85	15	15.15	
		LFM420S240	23.76	24	24.24	
		LFM420S280	27.72	28	28.28	
		LFM420S300	29.70	30	30.30	
		LFM420S360	35.64	36	36.36	
		LFM420S480	47.52	48	48.48	
		LFM420S540	53.46	54	54.54	
Operating Output Current Range	V_{in} =85V _{ac} ~264V _{ac} , see derating curve	LFM420S120	35.00A			A
		LFM420S150	28.00A			
		LFM420S240	17.50A			
		LFM420S280	15.00A			
		LFM420S300	14.00A			
		LFM420S360	11.67A			
		LFM420S480	8.75A			
		LFM420S540	7.78A			
Holdup Time	V_{in} =115Vac load:350W Ambient temperature=25°C	All	12			ms
	V_{in} =115Vac Load:420W Ambient temperature=25°C		8			
Output Voltage Regulation						
Load Regulation	10% Load to full load	All	±1.0			%



LFM420S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Line Regulation	V_{in} =High line to low line	All			± 0.5	%
Output Voltage Adjustment	$P_o \leq \text{max. rated power, } I_o \leq I_o \text{ max.}$	LFM420S280	0		+5	%
	$P_o \leq \text{max. rated power, } I_o \leq I_o \text{ max.}$	LFM420S540	-5		+2	%
	$P_o \leq \text{max. rated power, } I_o \leq I_o \text{ max.}$	Others	-5		+5	%
Over Voltage Protection	Latch off (reset after about one minute after the input is turned off)	LFM420S120		16		V_{dc}
		LFM420S150		20		
		LFM420S240		30		
		LFM420S280		35		
		LFM420S300		35		
		LFM420S360		50		
		LFM420S480		63		
		LFM420S540		63		
Over Current Protection	Constant current, auto recovery (see application note)	All	110		180	%
Short Circuit Protection	Auto recovery	All				
Over Temperature Protection	Auto recovery If conduction convection with external baseplate is used or the recommended temperature curve is exceeded, the T_c temperature must be maintained $< 85^\circ\text{C}$	All				
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz Band Width 3. Ambient Temperature= 25°C	LFM420S120			120	mV
		LFM420S150			150	
		LFM420S240			240	
		LFM420S280			280	
		LFM420S300			300	
		LFM420S360			360	
		LFM420S480			480	
		LFM420S540			540	
Load Capacitance	1. $V_{in}=115V_{ac}$ and $230V_{ac}$ 2. Output is max. load 3. Ambient temperature= 25°C	LFM420S120			29100	μF
		LFM420S150			23300	
		LFM420S240			14500	
		LFM420S280			12500	
		LFM420S300			11600	
		LFM420S360			9700	
		LFM420S480			7200	
		LFM420S540			6400	
Efficiency	1. Input Voltage is $230V_{ac}$ 2. Output is rated load 3. Ambient temperature= 25°C	LFM420S120		92.5%		%
		LFM420S150		93.0%		
		LFM420S240		94.0%		
		LFM420S280		94.0%		
		LFM420S300		94.0%		
		LFM420S360		94.0%		
		LFM420S480		94.0%		
		LFM420S540		94.5%		

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 Minute (without dielectric breakdown)	All			4250	V_{ac}
Input to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V_{ac}
Output to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V_{ac}
Isolation Resistance	Input to Output	All	100			$\text{M}\Omega$



LFM420S Series

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	P _{out} =max. rated power	All		65		kHz

GENERAL SPECIFICATIONS





PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	I _o =100%; T _a =25°C per MIL-HDBK-217F I _o =100%, T _a =25°C, Telcordia SR332	All	1600	400		K hours
Life Time (Detail Refer to App. Note)	Conduction cooling @75% Load, 40°C Fan cooling @75% Load, 40°C	All		119 288		k hours
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5,Table 516.5-1 10ms, each axis 3 times(±X、±Y、±Z axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII,15~2000Hz, X、Y、Z axis, 1 hour (each axis),. Total 3 hrs.	All		4		g
Weight	Baseplate versions Covered versions	All		350 470		g
Dimensions	Baseplate versions	All	5.00x3.00x1.00 Inches (127x76.2x25.40mm)			
	Covered versions		5.09x3.29x1.00 Inches (129.4x83.5x25.4mm)			
Safety	Class I, IEC/EN/UL 62368-1					Ed. 3.0
EMC Emission	EN 55032 (Class B), EN 61000-6-3, EN 61000-6-4, EN 61204-3, EN 61000-3-2, EN 61000-3-3, 47 CFR FCC Part 15 Subpart B					Class B
Conducted Disturbance	EN 55032, 47 CFR FCC Part 15 Subpart B (Class B)					Class B
Radiated Disturbance	EN 55032, 47 CFR FCC Part 15 Subpart B (Class B)					Class B
Harmonic Current Emissions	EN 61000-3-2					Class A, C, D
Voltage Fluctuations & Flicker	EN 61000-3-3					
EMC Immunity	EN 55035, EN 61000-6-1, EN 61000-6-2, EN 61204-3					
Electrostatic Discharge (ESD)	IEC 61000-4-2, Level 3: Air Discharge: ±8kV, Contact Discharge: ±4kV					Criterion A
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3, Level 3: 80~1000MHz, 10V/m					Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4, Level 3: ±2kV					Criterion A
Surge	IEC 61000-4-5, Level 4: L-N: ±2kV, L-E (Ground): ±4kV					Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6, Level 3: 0.15-80MHz, 10V					Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8, Level 4: 50-60Hz, 30A/m					Criterion A
Voltage Dips	IEC 61000-4-11, Dip: 30% Reduction IEC 61000-4-11, Dip >95% Reduction					Criterion A
Voltage Interruptions	IEC 61000-4-11, >95% Reduction					Criterion B
Application Note Link			LFM420S Series App Notes			





LFM420S Series

CHARACTERISTIC CURVE

Power Derating Curve

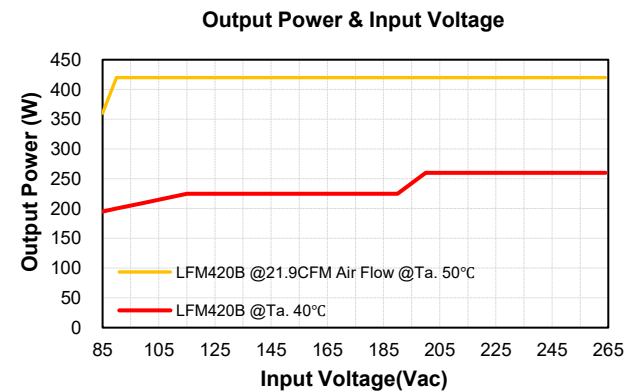
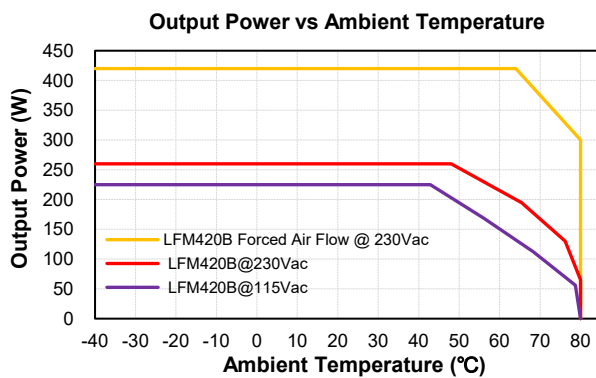
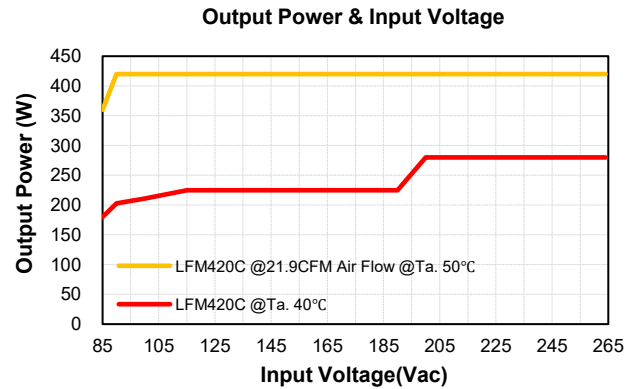
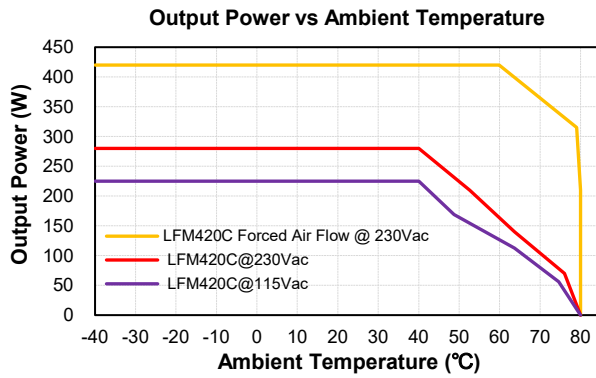


Conduction Convection with External Baseplate (24.8cmx48cmx0.12cm)



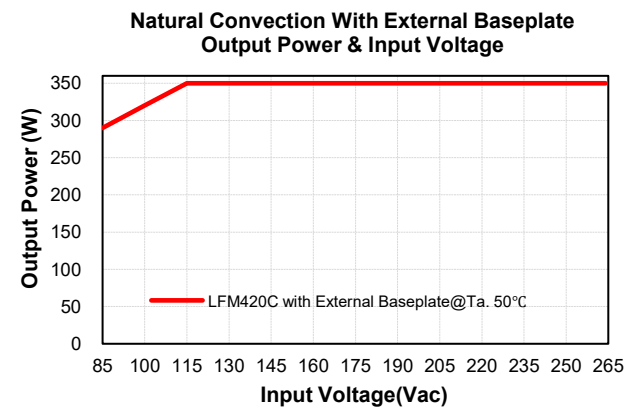
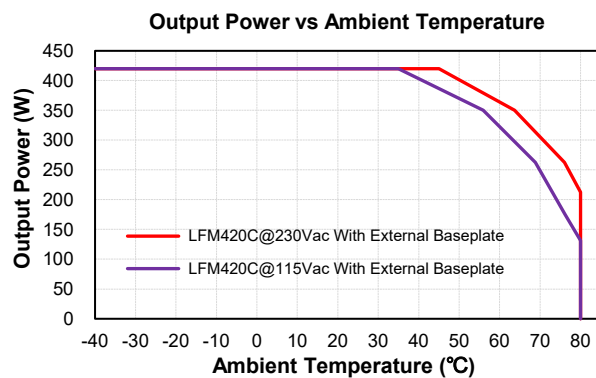




LFM420S Series

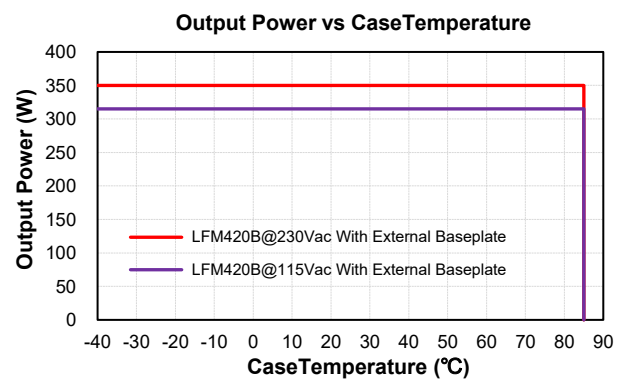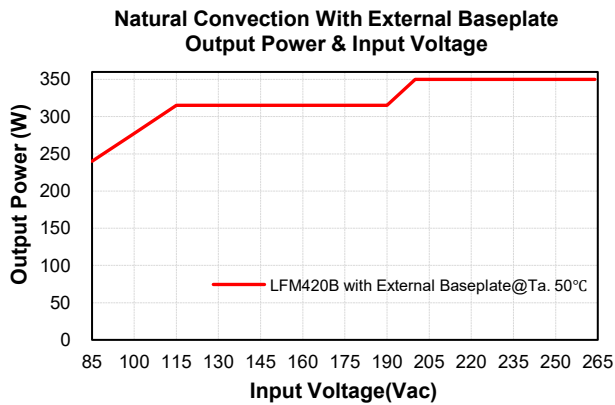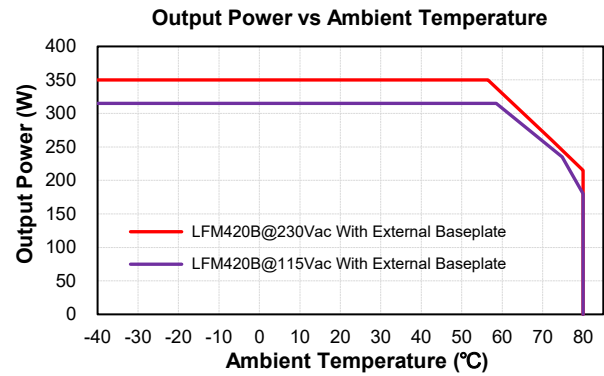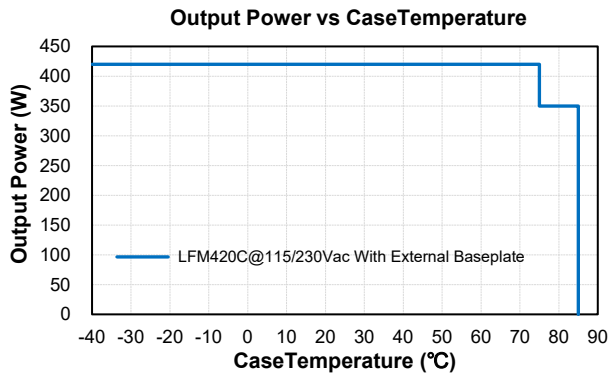


Performance Data

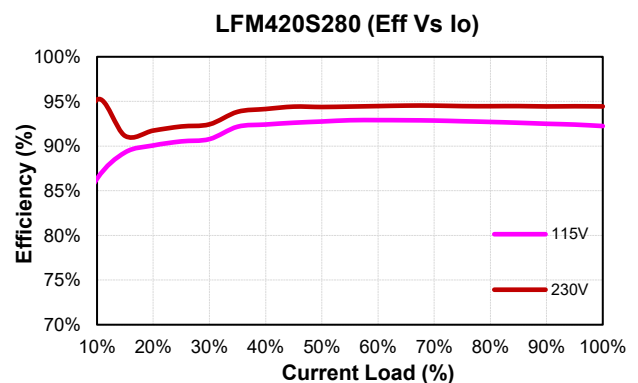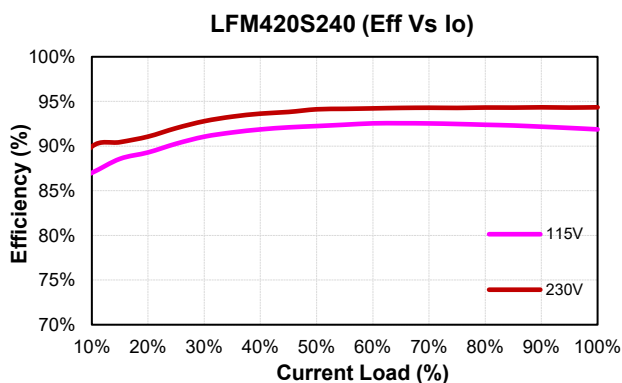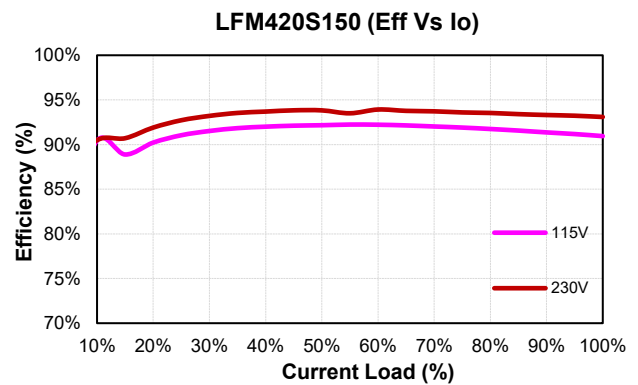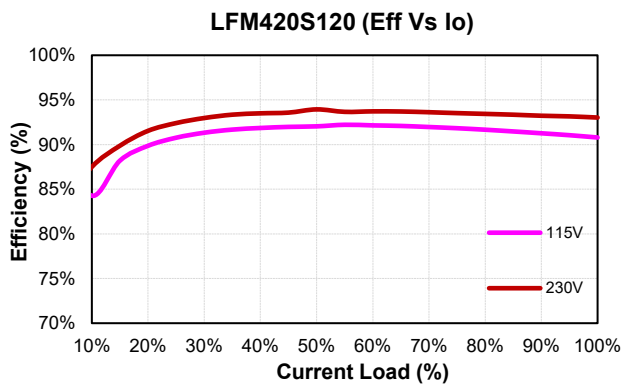




LFM420S Series


LFM420S300 (Eff Vs Io)

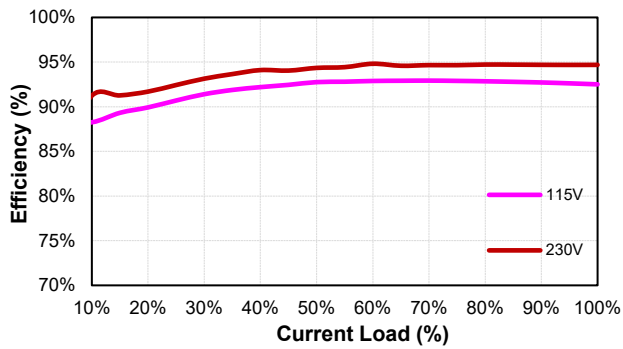


LFM420S360 (Eff Vs Io)

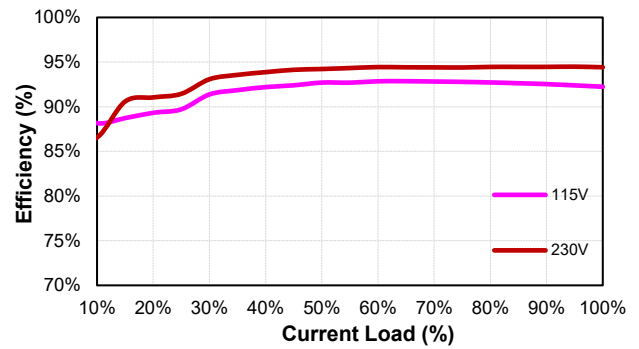

LFM420S480 (Eff Vs Io)

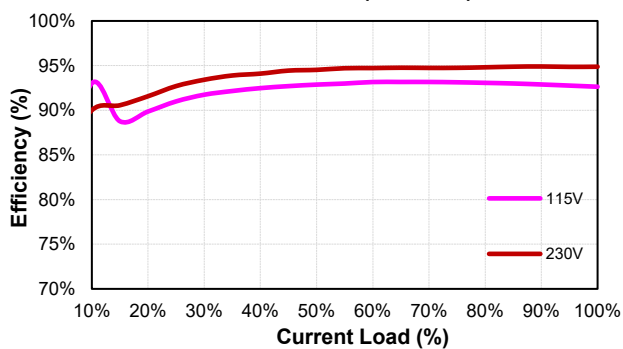





LFM420S540 (Eff Vs Io)

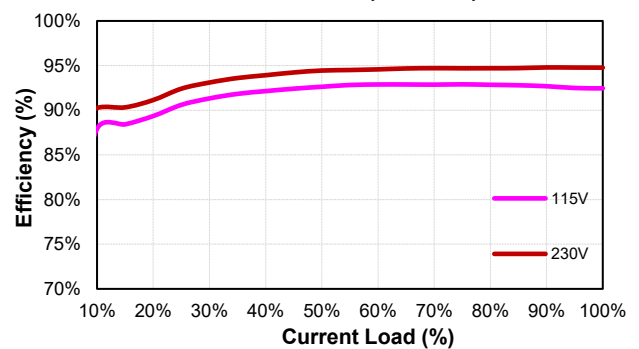



LFM420S Series

MECHANICAL SPECIFICATION

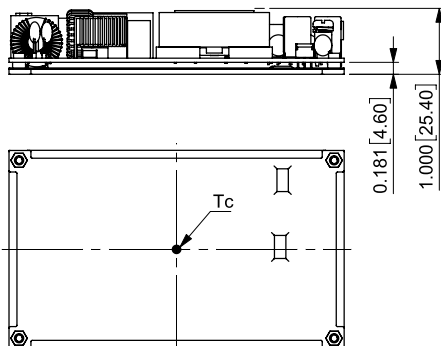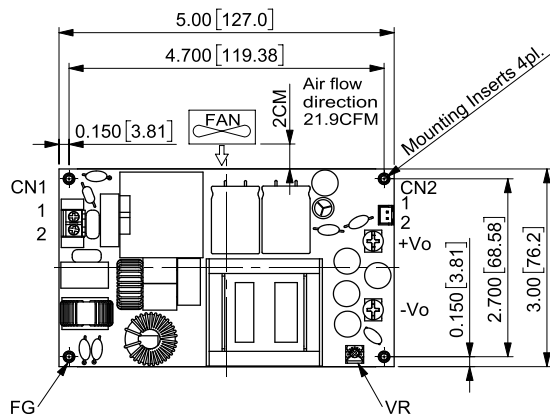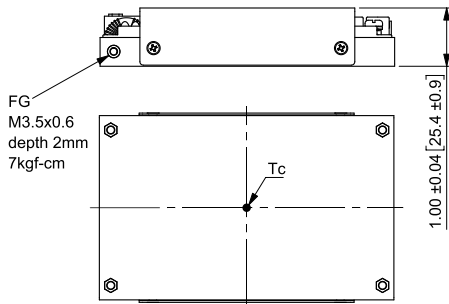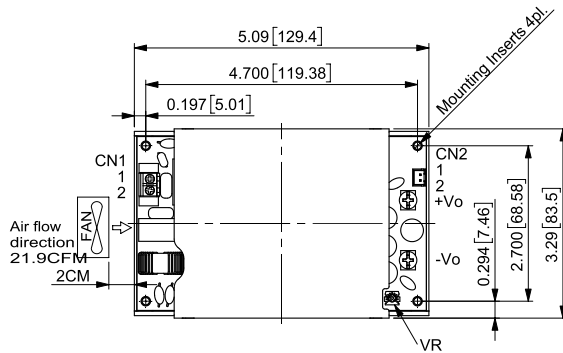

LFM420SXXXC LFM420SXXXC-C0

All Dimensions in Inches[mm]

Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):ECE ETB22

Pin	Function	Mating Wire Range
1	ACL	14~18 AWG
2	ACN	

DC Output Connector(CN2):TKP 8822-02-NHB or equivalent

Pin	Function	Mating Housing	Terminal
1	Rs+	JST XHP-2 or equivalent	JST SXH-001T-P0.6N or equivalent
2	Rs-		

DC Output Connector:KANG YANG PCB-58M4

Function	The screw locked torque
+Vo	M4 7kgf-cm
-Vo	

Mounting Inserts

Series	Option
Blank	Ø 3.2 Through depth 10.5mm
-C0	M3x0.5 Threaded depth 10.5mm

LFM420SXXXB LFM420SXXXB-C0

All Dimensions in Inches[mm]

Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):ECE ETB22

Pin	Function	Mating Wire Range
1	ACL	14~18 AWG
2	ACN	

DC Output Connector(CN2):TKP 8822-02-NHB or equivalent

Pin	Function	Mating Housing	Terminal
1	Rs+	JST XHP-2 or equivalent	JST SXH-001T-P0.6N or equivalent
2	Rs-		

DC Output Connector:KANG YANG PCB-58M4

Function	The screw locked torque
+Vo	M4 7kgf-cm
-Vo	

Mounting Inserts

Series	Option
Blank	Ø 3.2 Through depth 8.1mm
-C0	M3x0.5 Threaded depth 8.1mm