

Note **1** Please do not change the specified layout of the PCB dimension and the layout of the stencil plate dimension and thickness otherwise could not be responsible for the solderability of the product.

2 When copper-foil and resist are designed on the  area where underneath the product, Hirose can not guarantee the product.

3 Manual soldering could not be accepted on this product to prevent solder wicking and flux penetration.

4 The bridges should be designed with a sufficient distance from MS-156HF to prevent getting the cutting micro chips into the contact area.

~Example of PCB design~ (Layout of MS-156HF and Bridge)

~No good design

MS-156HF

7

A square room with a central circular feature. The room is divided into four quadrants by a cross. The top-right quadrant contains a small circle. The central circle is divided into four quadrants by a cross, with a small circle in the center of the central circle's top-right quadrant.

In this position where the bridge is close to MS-156HF, there is possibility of causing dysfunction caused by what the cutting micro chips get into MS-156HF when cutting PC

The cut position should be designed with a sufficient distance from MS-156HF.

5 Do not use this product as an interface, this product is only for circuit inspection.


6 Please refrain from using the product in environments specifically affected by excessive vibration, shock, dust, high humidity, gases, very high temperatures and very low temperatures such as outdoor equipment. It might cause degradation or destruction of the product. Even if it endures during a short time, long time qualification is not guaranteed.

7 Plugs can be roughly classified to two types.

- For mass production line automatic check (Press down type)
- For manual check (With retentive lock) : Unable to be used at production line.


8 Do not use a washing process.

9 Circuit shall be as follows.

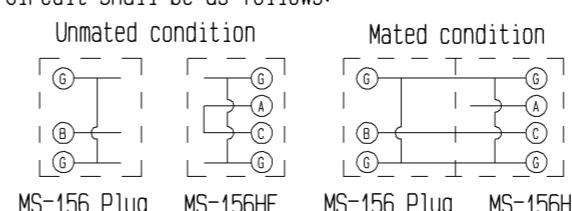


- 10 For use of this product, be sure to put contact area of plug on position P perpendicularly.
- 11 Lead coplanarity is to be 0.1mm MAX.
- 12 Point M indicates the center of the mating portion.
- 13 All lead layout is the same as MS-156NB which is conventional product, therefore the specified mounting condition of MS-156NB which shows dimension correspond to each \times number of the following is also available.




	※1	※2	※3	※4
size	1.05	0.55	1.05	0.3

3	BERYLLIUM COPPER	SELECTIVE GOLD PLATING	6	PS			
2	6T-NYRON		5	PS			
1	PHOSPHOR BRONZE	GOLD PLATING	4	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 10: 1	COUNT  1	DESCRIPTION OF REVISIONS DIS-J-000833	DESIGNED DS. YAMAKOSHI	CHECKED TY. OZAKI	DATE 08.04.07
 HIROSE ELECTRIC CO., LTD.		APPROVED : KJ. KAWAMURA		08.03.10	DRAWING NO.	EDC3-180639-04	
		CHECKED : TY. OZAKI		08.03.10	PART NO.	MS-156HF(01)	
		DESIGNED : DS. YAMAKOSHI		08.03.07	CODE NO.	CL358-0238-4-01	
		DRAWN : DS. YAMAKOSHI		08.03.07			


PACKAGING SPECIFICATION

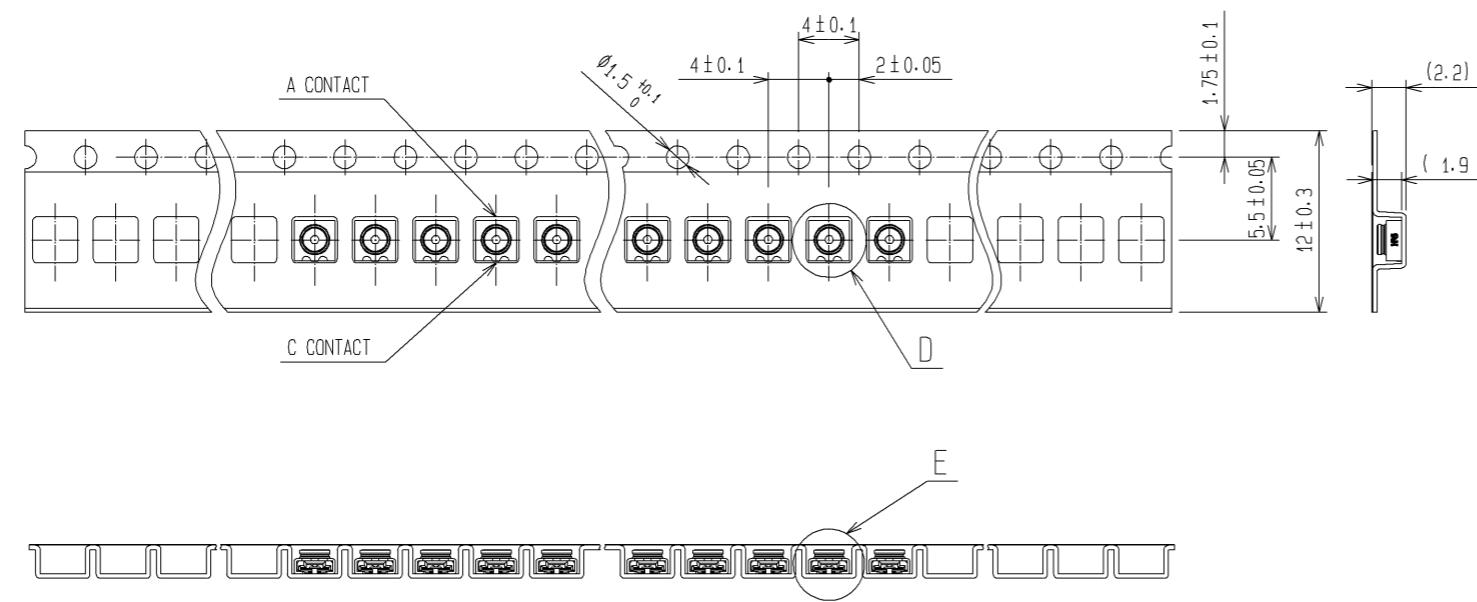

DRAWING OF PACKING
(100PCS PER REEL)

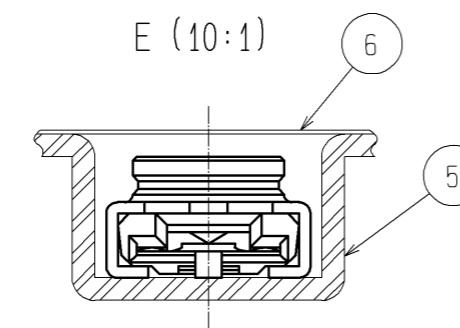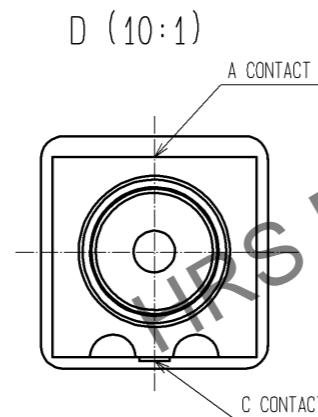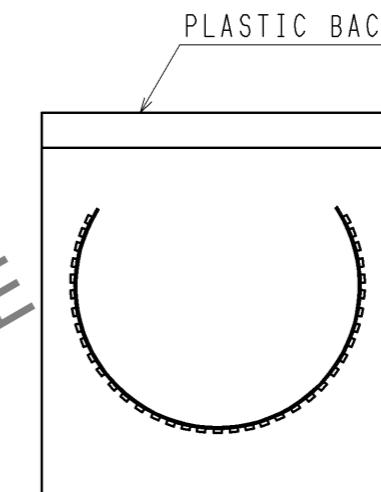

RECOMMENDED REFLOW TEMPERATURE PROFILE

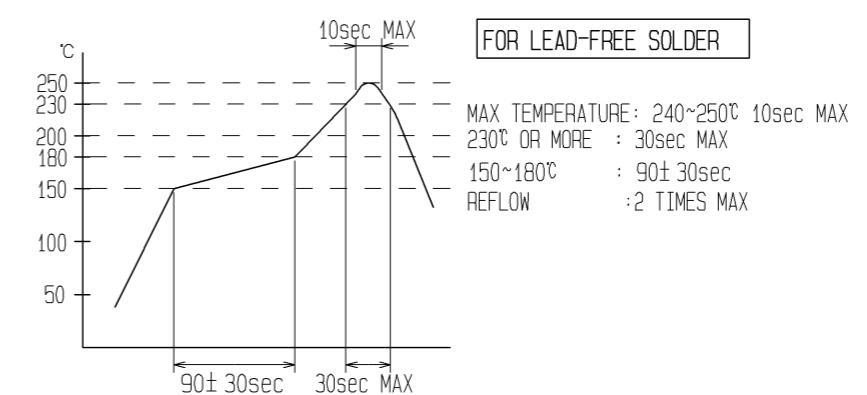

DRAWING NO.	EDC3-180639-04
PART NO.	MS-156HF(01)
CODE NO.	CL358-0238-4-01
	1 2 2