


## Low Jitter Programmable\* Crystal Oscillator: SG-8201CJ, SG-8201CG

### Features

- Crystal oscillator (Programmable\*)
- Output frequency: 1.2 MHz to 170 MHz
- Output: CMOS
- Supply voltage: 1.62 V to 3.63 V
- Frequency tolerance, Operating temperature:  
 $\pm 15 \times 10^{-6}$  / -40 °C to +105 °C  
 $\pm 25 \times 10^{-6}$  / -40 °C to +125 °C
- Phase jitter: 1.1 ps Typ.  
 (Offset freq.: 12 kHz to 20 MHz,  $f_0 = 125$  MHz)



SG-8201CJ



SG-8201CG

### Description

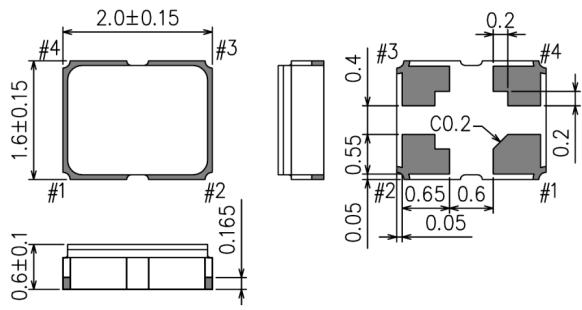
SG-8201CJ and SG-8201CG utilize Epson's new low noise fractional-N PLL technology, where the stability has been improved by ~2x and phase jitter has been reduced <1/25th versus the previous generation of Epson's programmable\* crystal oscillator.

SG-8201CJ and SG-8201CG can be programmed to any frequency from 1.2 MHz to 170 MHz, with wide operating temperature range up to 125°C.


SG-8201CJ and SG-8201CG are ideal for variety of consumer and industrial applications, which requires small form factor and/or operation in harsh environment.

### Outline Drawing and Terminal Assignment

SG-8201CJ



SG-8201CG

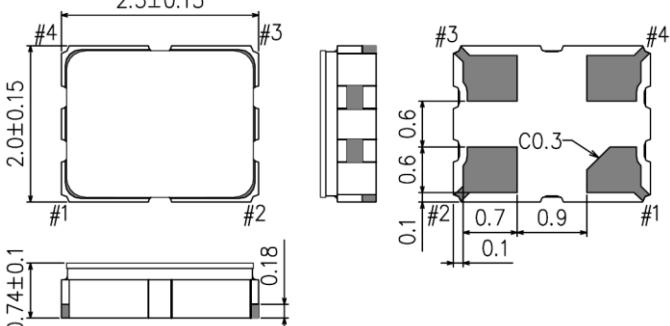

### Terminal Assignment

Pin #	Name	Function	
#1	OE	Output Enable	High <sup>*1</sup> or Open: Specified frequency output from OUT pin Low: OUT pin is low (pull down with 500 kΩ), only output driver is disabled
	OE	Output Enable	Low <sup>*2</sup> or Open: Specified frequency output from OUT pin High: OUT pin is low (pull down with 500 kΩ), only output driver is disabled
	ST	Standby	High <sup>*1 *3</sup> : Specified frequency output from OUT pin Low: OUT pin is low (pull down with 500 kΩ) Device goes to standby mode. Supply current reduces to the least as I_std
	ST	Standby	Low <sup>*2 *3</sup> : Specified frequency output from OUT pin High: OUT pin is low (pull down with 500 kΩ) Device goes to standby mode. Supply current reduces to the least as I_std
#2	GND	Ground	
#3	OUT	Clock output	
#4	V <sub>CC</sub>	Power supply	

\*1 If fixing it at High, please connect to V<sub>CC</sub> directly.

\*2 If fixing it at Low, please connect to GND directly.

\*3 If necessary to use Open, please select Output Enable function.

\* Programming with new writer is expected to be available from 2025.

## [ 1 ] Product Name / Product Number

## (1-1) Product Name (Standard Form)

SG-8201CJ: X1G005981xxxx16

SG-8201CG: X1G006191xxxx16

(Please contact Epson for details)

## (1-2) Product Number / Ordering Code

SG-8201CJ 25.000000MHz T B H P A  
 ① ② ③ ④⑤⑥⑦⑧

①Model ②Size ③Frequency ④Supply voltage (T: 1.8 V to 3.3 V Typ.)

⑤Frequency tolerance ⑥Operating temperature ⑦Function ⑧Rise/Fall time

②Size	
CJ	2.0 mm × 1.6 mm
CG	2.5 mm × 2.0 mm

⑦Function	
P	Output enable (#1pin = OE)
Q	Output enable (#1pin = $\bar{OE}$ )
S	Standby (#1pin = ST)
T	Standby (#1pin = ST)

⑧Rise/Fall time	
A	Default
B	Faster
C	Fast
D	Slow
E	Slower

⑤Frequency tolerance	
/	⑥Operating temperature
BH	$\pm 15 \times 10^{-6}$ / -40 °C to +105 °C
DJ	$\pm 25 \times 10^{-6}$ / -40 °C to +125 °C

## [ 2 ] Absolute Maximum Ratings

Parameter	Symbol	Specification			Unit	Conditions
		Min.	Typ.	Max.		
Maximum supply voltage	GND-V <sub>CC</sub>	-0.3	-	4	V	GND = 0 V
Input voltage	V <sub>IN</sub>	GND - 0.3	-	V <sub>CC</sub> + 0.3	V	#1 pin
Storage temperature range	T <sub>stg</sub>	-55	-	+125	°C	

## [ 3 ] Operating Range

Parameter	Symbol	Specification			Unit	Conditions
		Min.	Typ.	Max.		
Supply voltage	V <sub>CC</sub>	1.62	-	3.63	V	
Supply voltage	GND	0.0	0.0	0.0	V	
Input voltage	V <sub>IN</sub>	GND	-	V <sub>CC</sub>	V	#1 pin
Operating temperature range	T <sub>use</sub>	-40	+25	+105	°C	
		-40	+25	+125	°C	
CMOS load condition	L <sub>CMOS</sub>	-	-	15	pF	

\* Power supply startup time (0 %V<sub>CC</sub> → 90 %V<sub>CC</sub>) should be between 5  $\mu$ s and 500 ms\* A 0.01  $\mu$ F to 0.1  $\mu$ F or over bypass capacitor should be connected between V<sub>CC</sub> and GND pins located close to the device

## [ 4 ] Frequency Characteristics

(Unless stated otherwise [ 3 ] Operating Range)

Parameter	Symbol	Specification			Unit	Conditions
		Min.	Typ.	Max.		
Output frequency	f <sub>o</sub>	1.2		170	MHz	
		-15	-	+15	$\times 10^{-6}$	T <sub>use</sub> = -40 °C to +105 °C
		-25	-	+25	$\times 10^{-6}$	T <sub>use</sub> = -40 °C to +125 °C
Frequency aging *2	f <sub>age</sub>	Included in frequency tolerance			$\times 10^{-6}$	+25 °C, First year

\*1 Frequency tolerance includes initial frequency tolerance, frequency / temperature characteristics, frequency / voltage coefficient, frequency / load coefficient and frequency aging (+25 °C, first year)

\*2 Frequency aging is estimated from environmental reliability tests; expected amount of the frequency variation. This is not intended to be a guarantee of the product life cycle.

## [ 5 ] Electrical Characteristics (Unless stated otherwise [ 3 ] Operating Range)

Parameter	Symbol	Specification			Unit	Conditions	
		Min.	Typ.	Max.			
Start-up time	t_str	-	-	3	ms	t = 0 at V <sub>CC</sub> > 1.62 V	
Current consumption (No load) V <sub>CC</sub> = 1.62 V to 1.98 V	I <sub>CC</sub>	-	5.2	7.0	mA	1.2 MHz ≤ f <sub>o</sub> ≤ 25 MHz	
		-	5.4	7.3		25 MHz < f <sub>o</sub> ≤ 50 MHz	
		-	5.7	7.7		50 MHz < f <sub>o</sub> ≤ 75 MHz	
		-	6.2	8.2		75 MHz < f <sub>o</sub> ≤ 100 MHz	
		-	6.9	9.4		100 MHz < f <sub>o</sub> ≤ 125 MHz	
		-	7.8	10.4		125 MHz < f <sub>o</sub> ≤ 170 MHz	
Current consumption (No load) V <sub>CC</sub> = 2.25 V to 2.75 V	I <sub>CC</sub>	-	5.4	7.2	mA	1.2 MHz ≤ f <sub>o</sub> ≤ 25 MHz	
		-	5.7	7.6		25 MHz < f <sub>o</sub> ≤ 50 MHz	
		-	6.3	8.2		50 MHz < f <sub>o</sub> ≤ 75 MHz	
		-	6.9	9.1		75 MHz < f <sub>o</sub> ≤ 100 MHz	
		-	7.9	10.7		100 MHz < f <sub>o</sub> ≤ 125 MHz	
		-	9.2	12.4		125 MHz < f <sub>o</sub> ≤ 170 MHz	
Current consumption (No load) V <sub>CC</sub> = 2.97 V to 3.63 V	I <sub>CC</sub>	-	5.6	7.5	mA	1.2 MHz ≤ f <sub>o</sub> ≤ 25 MHz	
		-	6.1	8.1		25 MHz < f <sub>o</sub> ≤ 50 MHz	
		-	7.0	9.1		50 MHz < f <sub>o</sub> ≤ 75 MHz	
		-	7.9	10.4		75 MHz < f <sub>o</sub> ≤ 100 MHz	
		-	9.1	12.4		100 MHz < f <sub>o</sub> ≤ 125 MHz	
		-	11.2	15.0		125 MHz < f <sub>o</sub> ≤ 170 MHz	
Disable current	I <sub>dis</sub>	-	5.0	7.2	mA	V <sub>CC</sub> = 1.62 V to 1.98 V	
		-	5.0	7.3		V <sub>CC</sub> = 2.25 V to 2.75 V	
		-	5.1	7.4		V <sub>CC</sub> = 2.97 V to 3.63 V	
Stand-by current	I <sub>std</sub>	-	0.3	15.0	μA	V <sub>CC</sub> = 1.62 V to 1.98 V	
		-	0.3	15.0		V <sub>CC</sub> = 2.25 V to 2.75 V	
		-	0.5	15.0		V <sub>CC</sub> = 2.97 V to 3.63 V	
Output voltage (DC characteristics)	V <sub>OH</sub>	90 % V <sub>CC</sub>	-	-	V	Rise/Fall time	
	V <sub>OL</sub>	-	-	10 % V <sub>CC</sub>	V	Default 'A' Option *1	Other Options
Symmetry	SYM	45	50	55	%	I <sub>OH</sub>	I <sub>OL</sub>
	tr/tf				ns	fo > 125 MHz	'B'
		-	-	2.0		75 MHz < fo ≤ 125 MHz	'C'
		-	-	2.5		50 MHz < fo ≤ 75 MHz	'D'
		-	-	4.0		fo ≤ 50 MHz	'E'
Input voltage	V <sub>IH</sub>	70 % V <sub>CC</sub>	-	-	V	fo > 125 MHz	
	V <sub>IL</sub>	-	-	30 % V <sub>CC</sub>	V	75 MHz < fo ≤ 125 MHz	
Input capacitance	C <sub>IN</sub>	-	3	5	pF	50 MHz < fo ≤ 75 MHz	
Input pull up resistance (OE)	R <sub>UP1</sub>	-	40	-	kΩ	fo ≤ 50 MHz	
Input pull up resistance (ST)	R <sub>UP1</sub>	-	40	-	kΩ	fo > 125 MHz	
	R <sub>UP2</sub>	-	10	-	MΩ	75 MHz < fo ≤ 125 MHz	
Input pull up resistance (ST)	R <sub>UP1</sub>	-	40	-	kΩ	50 MHz < fo ≤ 75 MHz	
Input pull down resistance (OE)	R <sub>DN1</sub>	-	40	-	kΩ	fo ≤ 50 MHz	
Output pull down resistance	R <sub>DN</sub>	-	500	-	kΩ	fo > 125 MHz	
Output disable time (OE)	t <sub>stp_oe</sub>	-	-	1	μs	75 MHz < fo ≤ 125 MHz	
Output disable time (ST)	t <sub>stp_st</sub>	-	-	1	μs	50 MHz < fo ≤ 75 MHz	
Output enable time (OE)	t <sub>sta_oe</sub>	-	-	100 ns + 2 clock cycles	-	fo ≤ 50 MHz	
Output enable time (ST)	t <sub>sta_st</sub>	-	-	3	ms	fo > 125 MHz	

\*1 Default 'A' Rise/Fall time is dependent on programmed frequency

(Unless stated otherwise [ 3 ] Operating Range)

Parameter	Symbol	Specification			Unit	Conditions
		Min.	Typ.	Max.		
Phase jitter	$t_{PJ}$	-	1.2	-	ps	fo = 25 MHz, Offset frequency: 12 kHz to 5 MHz
		-	1.2	-		fo = 50 MHz, Offset frequency: 12 kHz to 20 MHz
		-	1.2	-		fo = 75 MHz, Offset frequency: 12 kHz to 20 MHz
		-	1.2	-		fo = 100 MHz, Offset frequency: 12 kHz to 20 MHz
		-	1.1	-		fo = 125 MHz, Offset frequency: 12 kHz to 20 MHz
		-	1.4	-		fo = 150 MHz, Offset frequency: 12 kHz to 20 MHz
		-	1.5	-		fo = 170 MHz, Offset frequency: 12 kHz to 20 MHz

## [ 6 ] Thermal Resistance (For Reference Only)

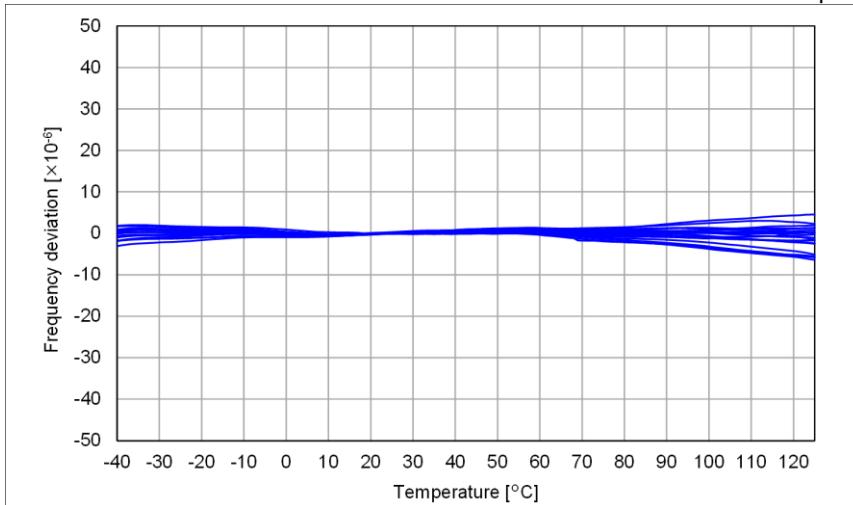
Parameter	Symbol	Specification			Unit	Conditions
		Min.	Typ.	Max.		
Junction temperature	$T_J$	-	-	+150	°C	
Junction to case	$\theta_{jc}$	-	129	-	°C/W	SG-8201CJ
		-	121	-	°C/W	SG-8201CG
Junction to ambient	$\theta_{ja}$	-	257	-	°C/W	SG-8201CJ
		-	208	-	°C/W	SG-8201CG

## [ 7 ] Typical Performance Characteristics (For Reference Only)

The following data shows typical performance characteristics








## (7-1) Frequency / Temperature Characteristics

n = 20 pcs



## (7-2) Current Consumption

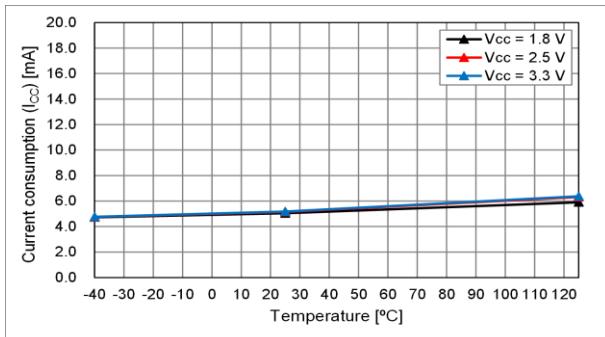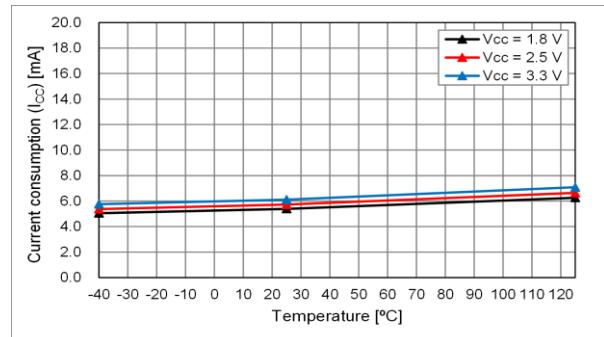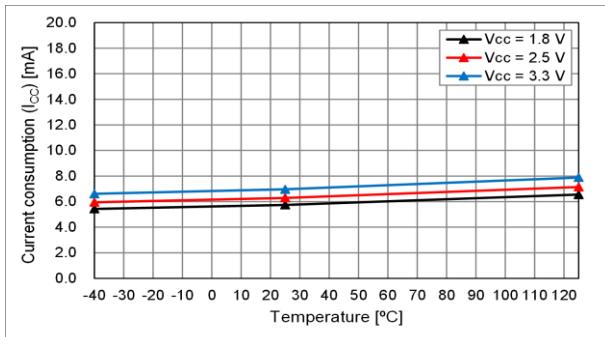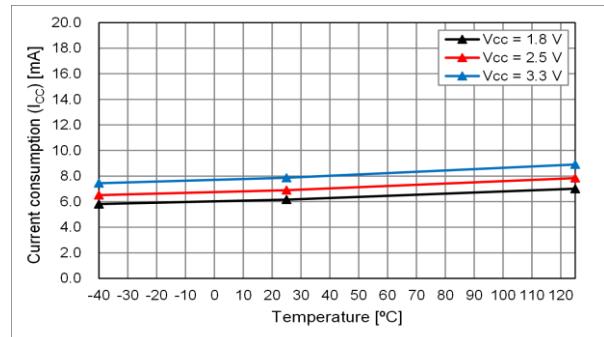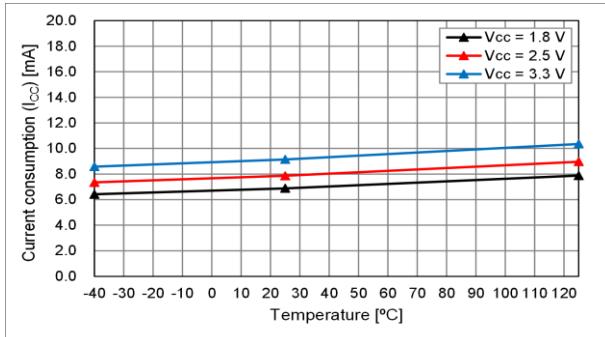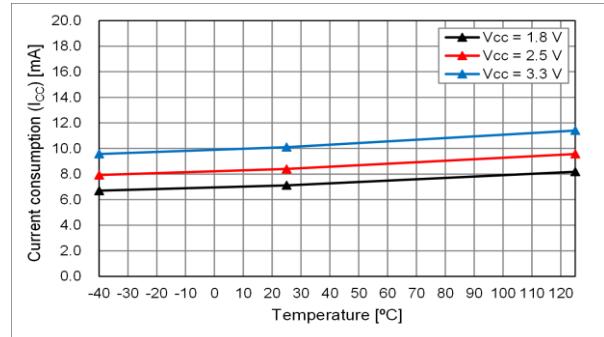
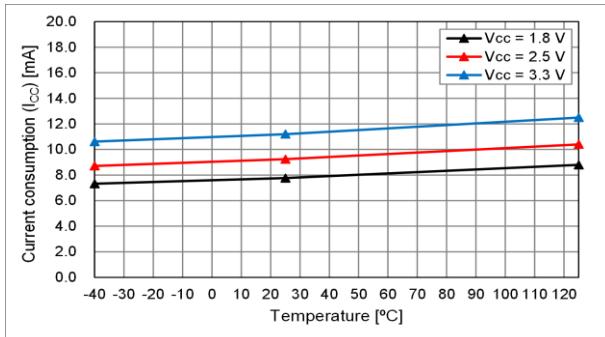
Temperature Characteristic (No load)

 $f_o = 25 \text{ MHz}$  $f_o = 50 \text{ MHz}$  $f_o = 75 \text{ MHz}$  $f_o = 100 \text{ MHz}$  $f_o = 125 \text{ MHz}$  $f_o = 150 \text{ MHz}$  $f_o = 170 \text{ MHz}$ 

## (7-2) Current Consumption [cont'd]





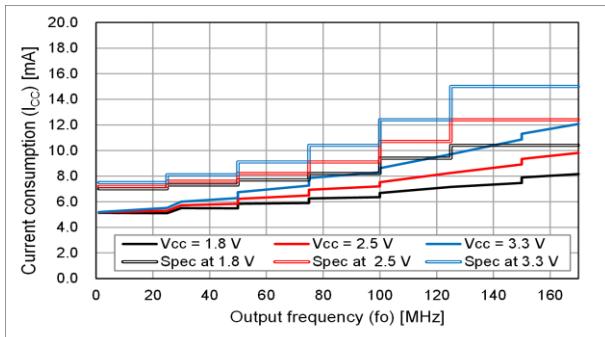
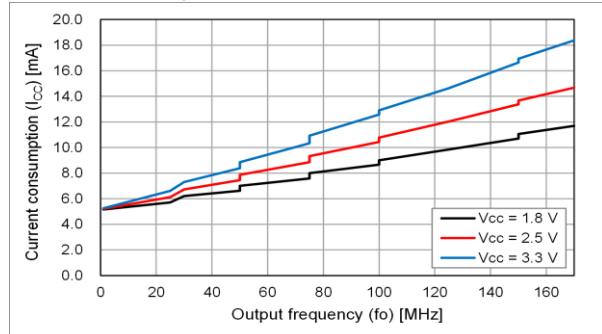
Frequency Dependency ( $T_{use} = +25^{\circ}\text{C}$ )

No load









 $L_{\text{CMOS}} = 15 \text{ pF}$ 

The actual current consumption is the total of the current under the condition of no load and the current to drive the output load ( $fo \times L_{\text{CMOS}} \times V_{\text{cc}}$ ). To reduce the current consumption, it is effective to use lower frequency, lower supply voltage and lower output load.








## (7-3) Rise/Fall Time

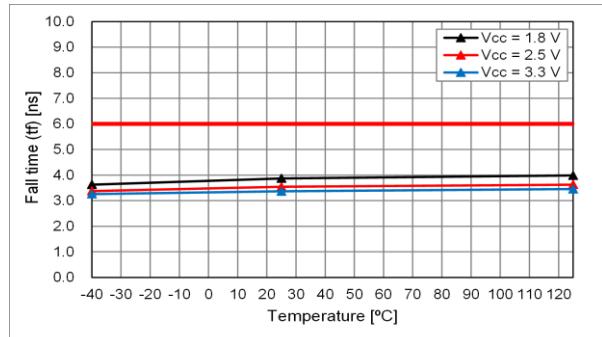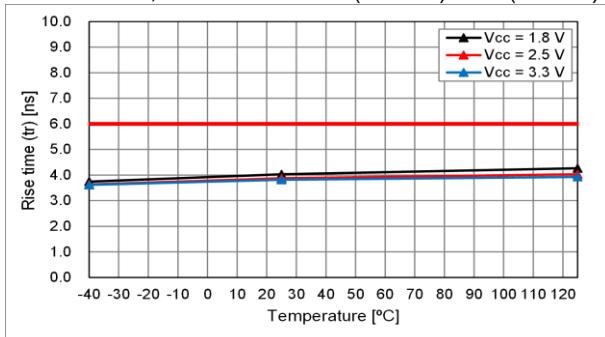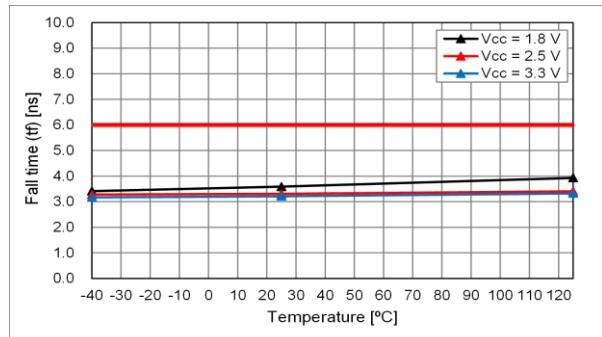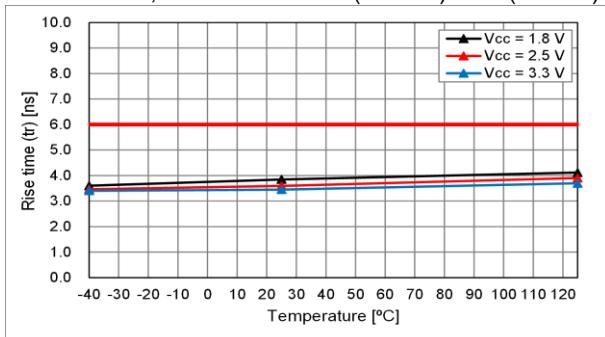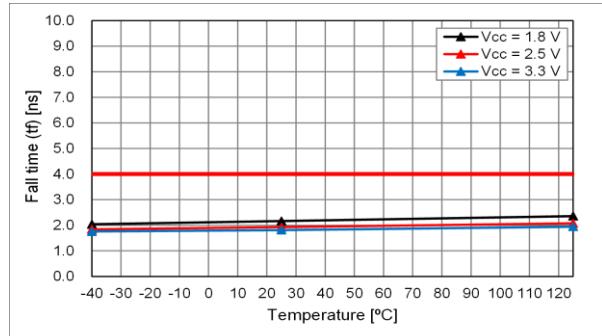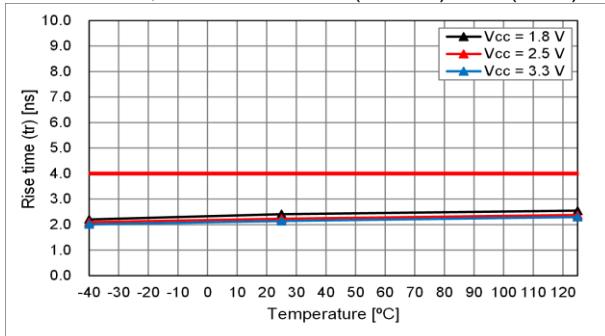Temperature Characteristic ( $20\% - 80\% V_{\text{cc}}$ ,  $L_{\text{CMOS}} = 15 \text{ pF}$ ) $fo = 25 \text{ MHz}$ , Rise/Fall time: A (Default) or E (Slower) $fo = 50 \text{ MHz}$ , Rise/Fall time: A (Default) or E (Slower) $fo = 75 \text{ MHz}$ , Rise/Fall time: A (Default) or D (Slow)









## (7-3) Rise/Fall Time [cont'd]

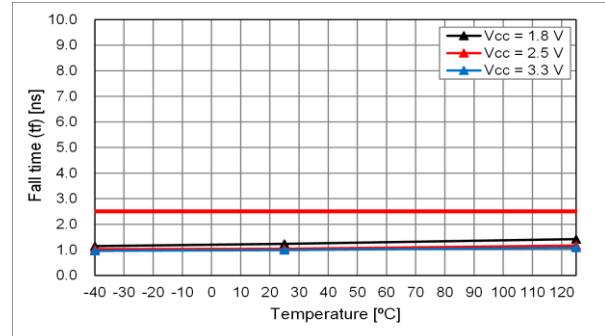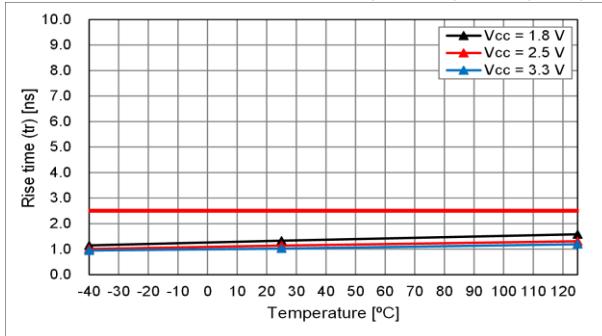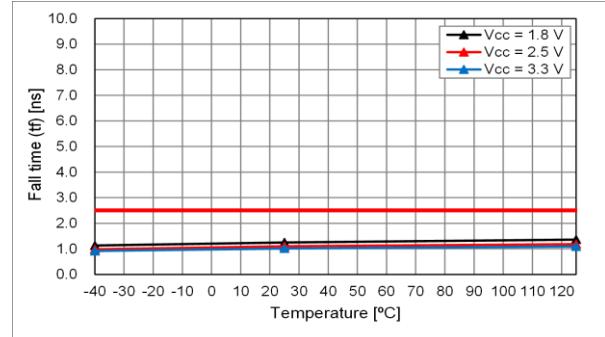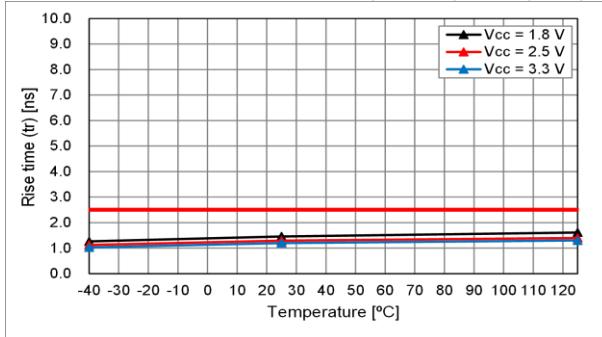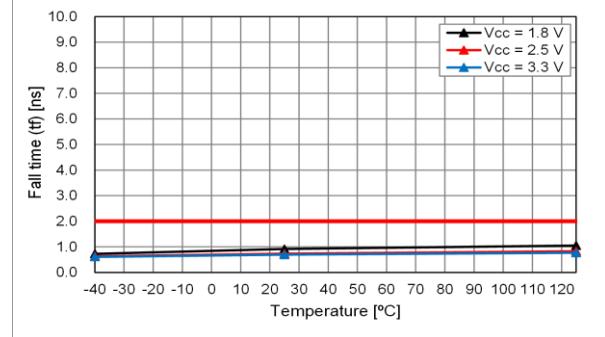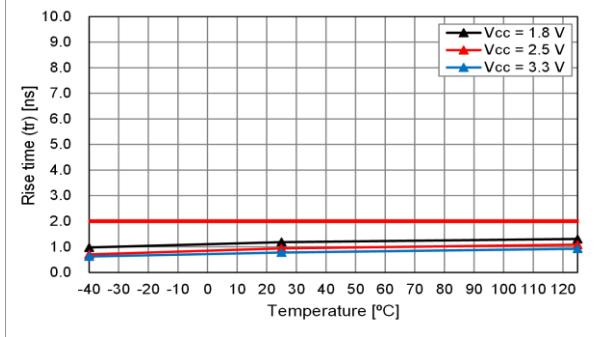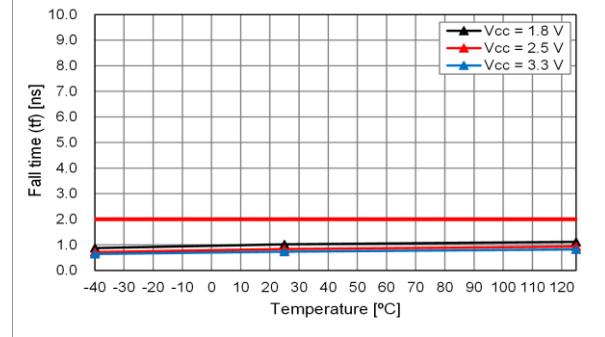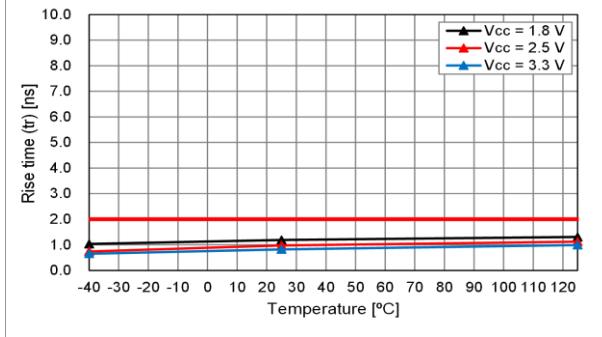Temperature Characteristic (20 % - 80 %V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF)f<sub>o</sub> = 100 MHz, Rise/Fall time: A (Default) or C (Fast)f<sub>o</sub> = 125 MHz, Rise/Fall time: A (Default) or C (Fast)f<sub>o</sub> = 150 MHz, Rise/Fall time: A (Default) or B (Faster)f<sub>o</sub> = 170 MHz, Rise/Fall time: A (Default) or B (Faster)






## (7-4) Symmetry

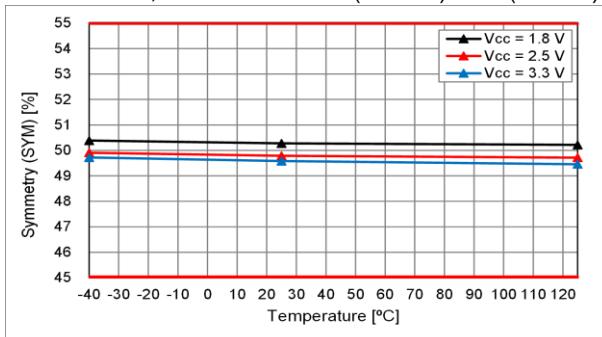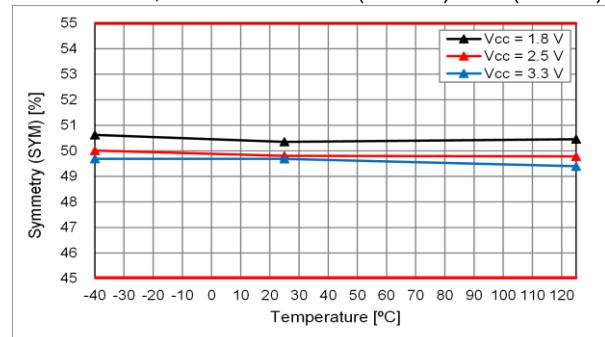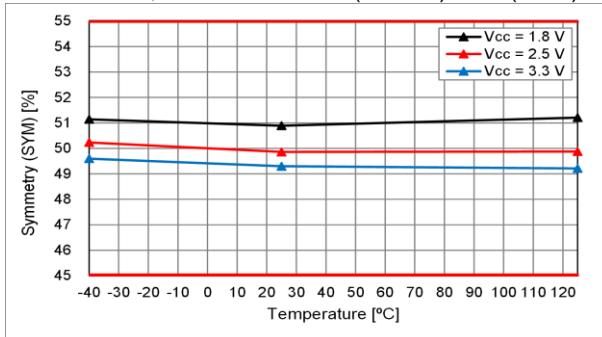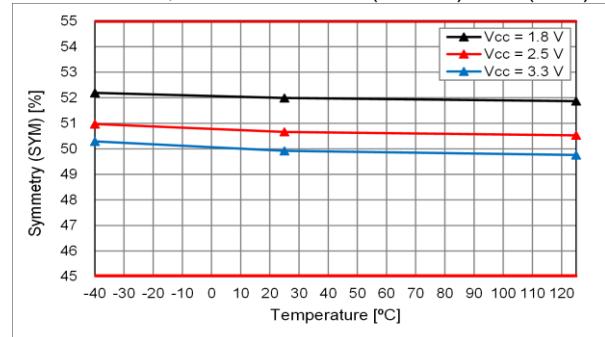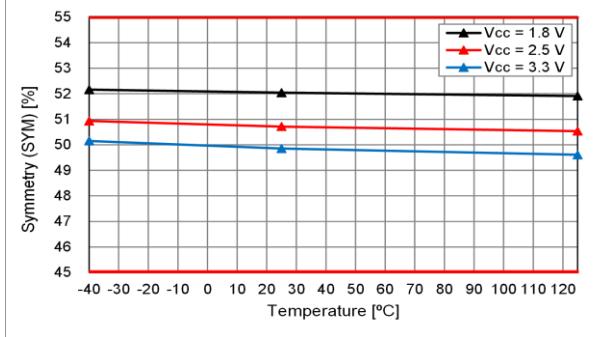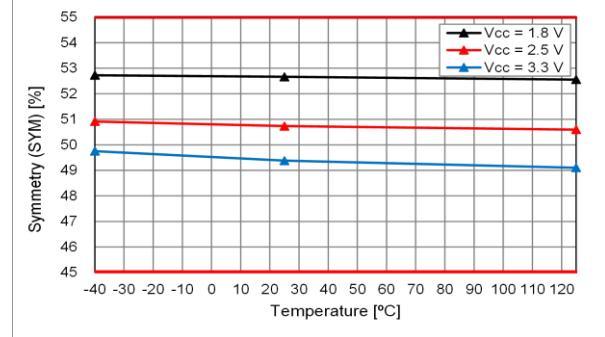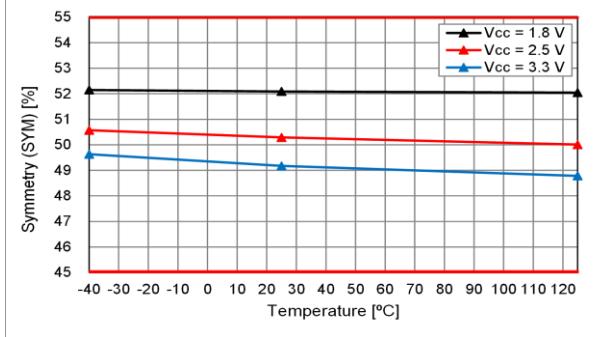Temperature Characteristic ( $L_{CMOS} = 15 \text{ pF}$ ) $f_o = 25 \text{ MHz}$ , Rise/Fall time: A (Default) or E (Slower) $f_o = 50 \text{ MHz}$ , Rise/Fall time: A (Default) or E (Slower) $f_o = 75 \text{ MHz}$ , Rise/Fall time: A (Default) or D (Slow) $f_o = 100 \text{ MHz}$ , Rise/Fall time: A (Default) or C (Fast) $f_o = 125 \text{ MHz}$ , Rise/Fall time: A (Default) or C (Fast) $f_o = 150 \text{ MHz}$ , Rise/Fall time: A (Default) or B (Faster) $f_o = 170 \text{ MHz}$ , Rise/Fall time: A (Default) or B (Faster)

## (7-5) Output Voltage

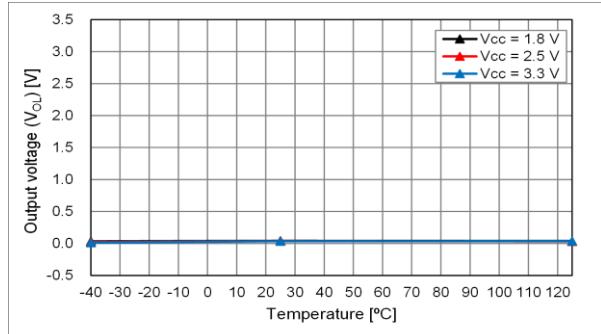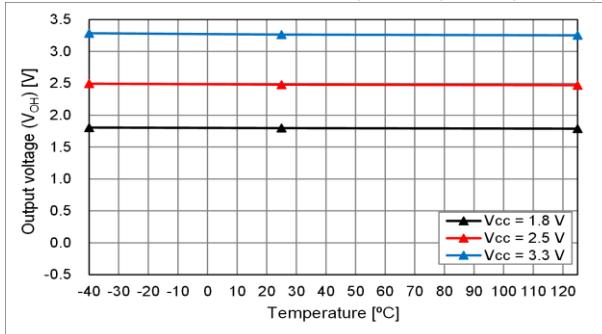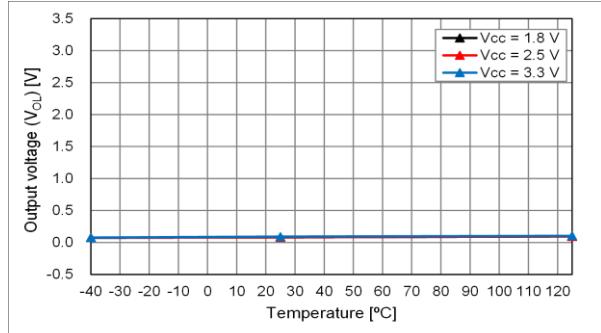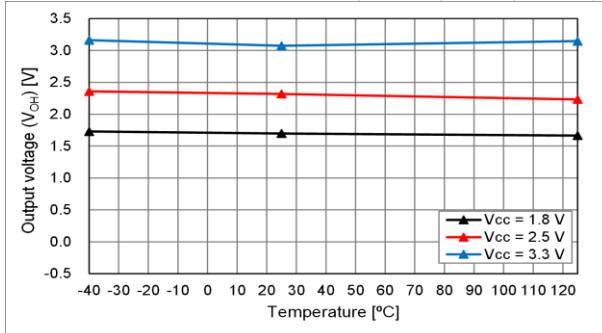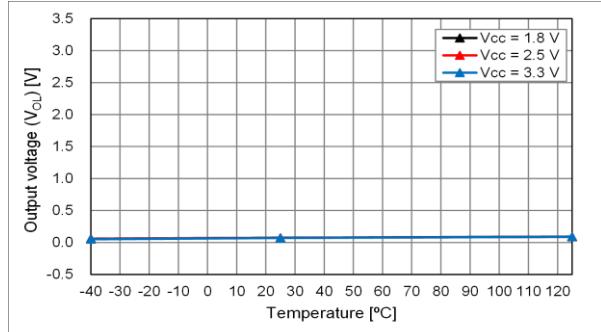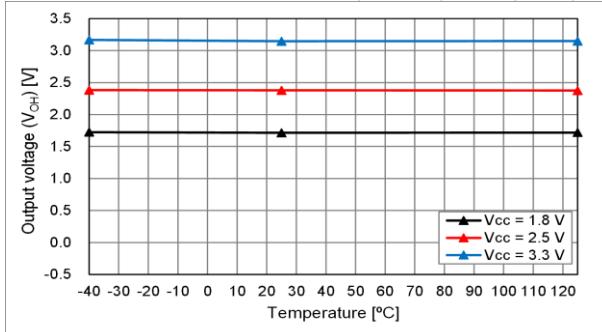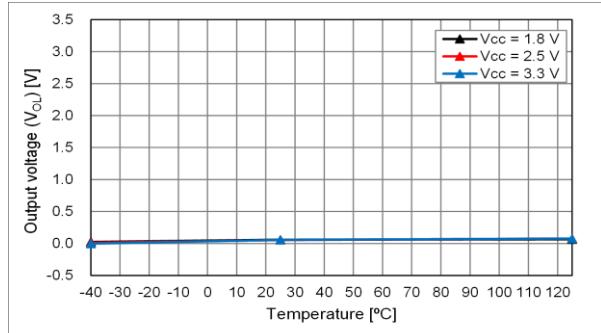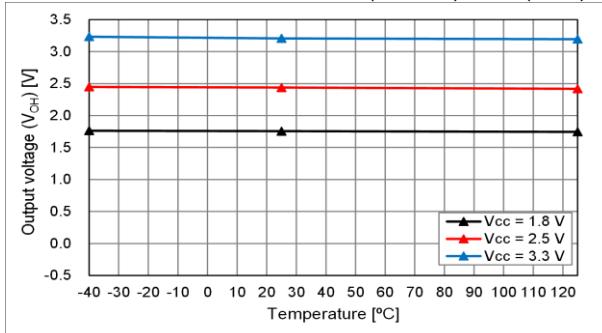Temperature Characteristic ( $L_{CMOS} = 15 \text{ pF}$ ) $f_o = 25 \text{ MHz}$ , Rise/Fall time: A (Default) or E (Slower) $f_o = 50 \text{ MHz}$ , Rise/Fall time: A (Default) or E (Slower) $f_o = 75 \text{ MHz}$ , Rise/Fall time: A (Default) or D (Slow) $f_o = 100 \text{ MHz}$ , Rise/Fall time: A (Default) or C (Fast)


## (7-5) Output Voltage [cont'd]

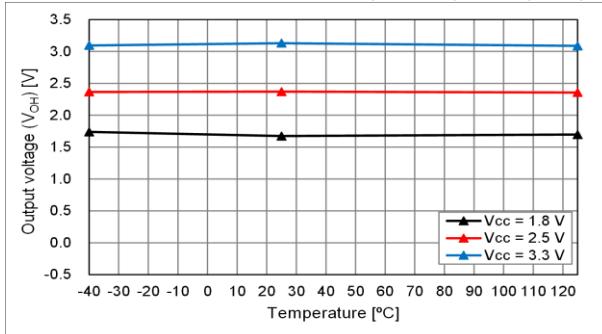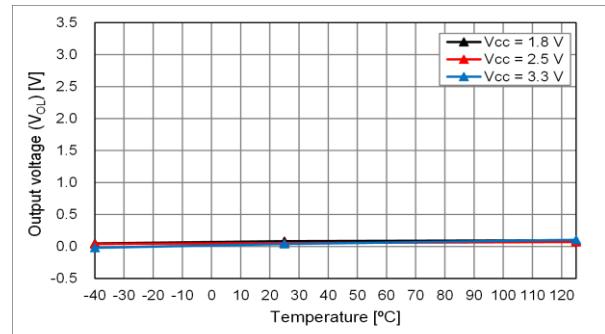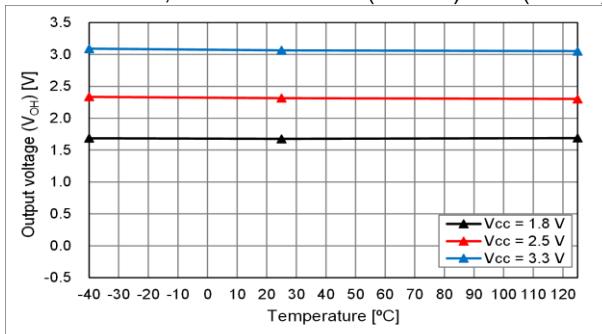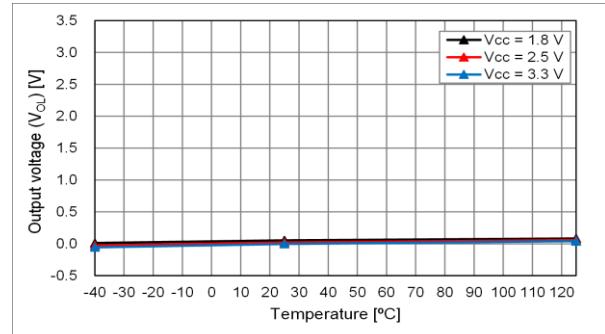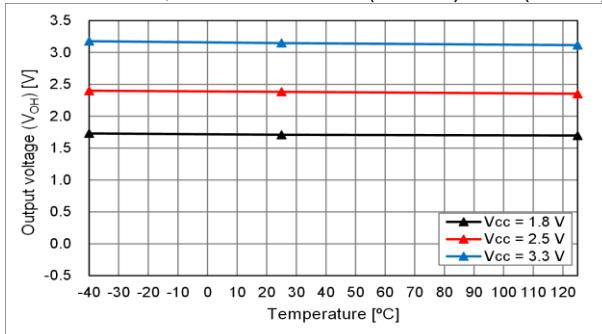Temperature Characteristic ( $L_{CMOS} = 15 \text{ pF}$ ) $f_o = 125 \text{ MHz}$ , Rise/Fall time: A (Default) or C (Fast) $f_o = 150 \text{ MHz}$ , Rise/Fall time: A (Default) or B (Faster) $f_o = 170 \text{ MHz}$ , Rise/Fall time: A (Default) or B (Faster)


## (7-6) Output Waveform

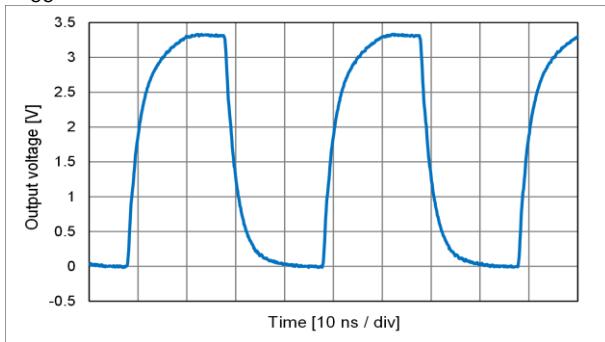$f_o = 25 \text{ MHz}$ ,  $L_{\text{CMOS}} = 15 \text{ pF}$ ,  $T_{\text{use}} = +25^\circ\text{C}$ , Rise/Fall time: A (Default) or E (Slower)


$V_{\text{CC}} = 3.3 \text{ V}$



$V_{\text{CC}} = 2.5 \text{ V}$

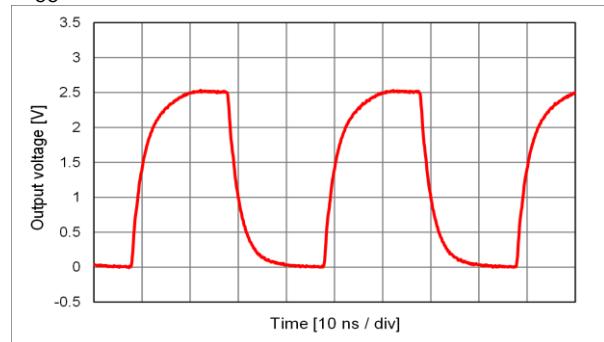


$V_{\text{CC}} = 1.8 \text{ V}$

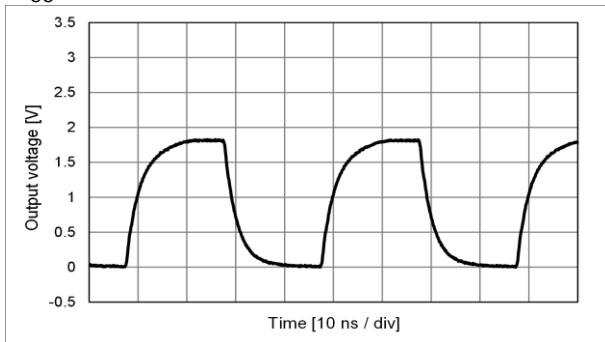


$f_o = 50 \text{ MHz}$ ,  $L_{\text{CMOS}} = 15 \text{ pF}$ ,  $T_{\text{use}} = +25^\circ\text{C}$ , Rise/Fall time: A (Default) or E (Slower)

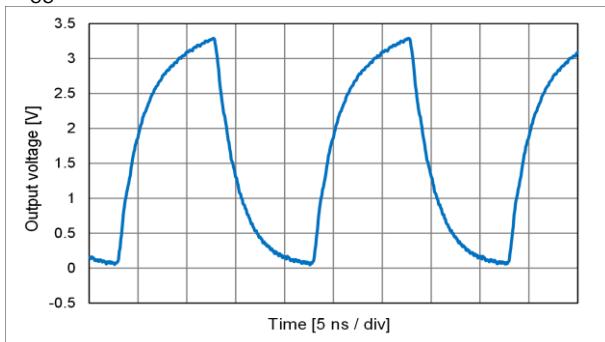
$V_{\text{CC}} = 3.3 \text{ V}$



$V_{\text{CC}} = 2.5 \text{ V}$

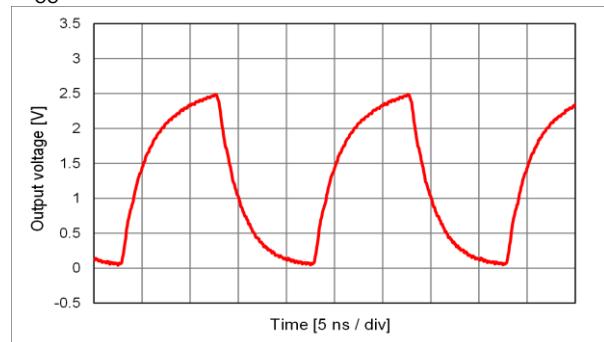


$V_{\text{CC}} = 1.8 \text{ V}$

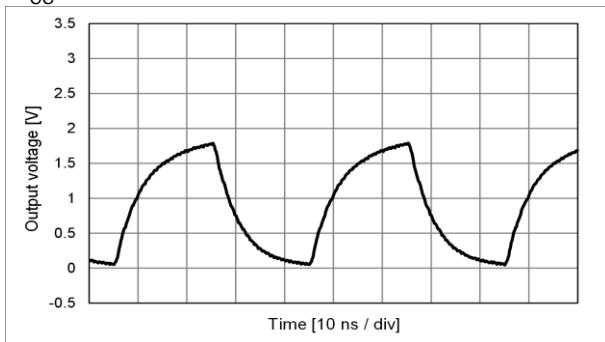


## (7-6) Output Waveform [cont'd]

$f_o = 75 \text{ MHz}$ ,  $L_{\text{CMOS}} = 15 \text{ pF}$ ,  $T_{\text{use}} = +25 \text{ }^\circ\text{C}$ , Rise/Fall time: A (Default) or D (Slow)

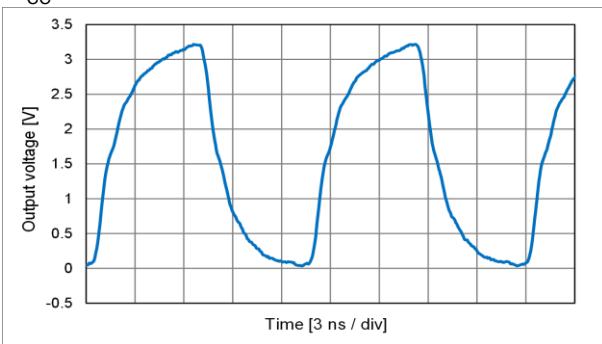
$V_{\text{CC}} = 3.3 \text{ V}$



$V_{\text{CC}} = 2.5 \text{ V}$

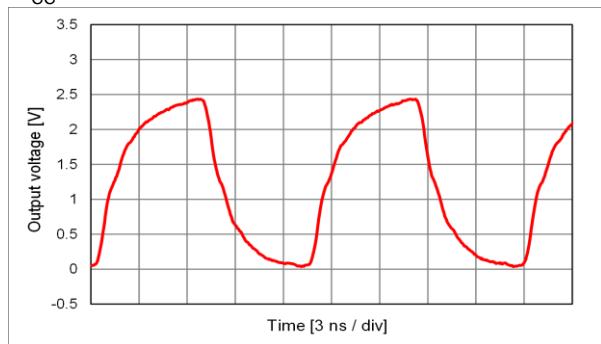


$V_{\text{CC}} = 1.8 \text{ V}$

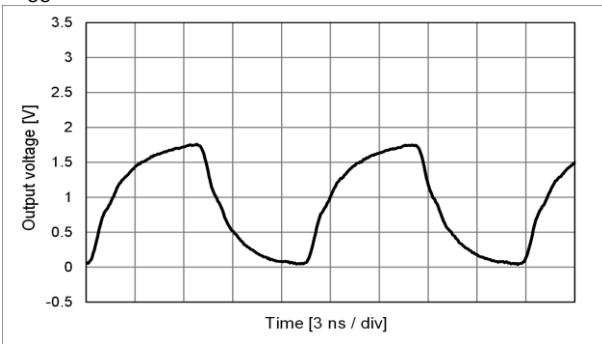


$f_o = 100 \text{ MHz}$ ,  $L_{\text{CMOS}} = 15 \text{ pF}$ ,  $T_{\text{use}} = +25 \text{ }^\circ\text{C}$ , Rise/Fall time: A (Default) or C (Fast)

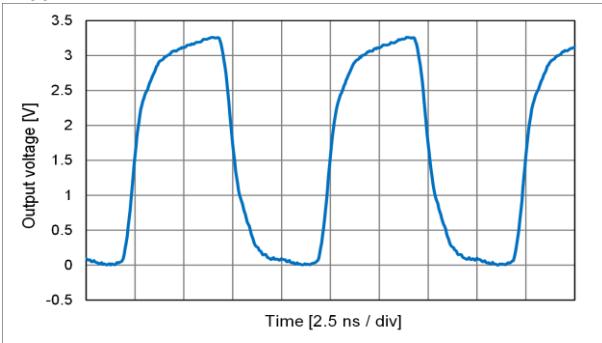
$V_{\text{CC}} = 3.3 \text{ V}$



$V_{\text{CC}} = 2.5 \text{ V}$

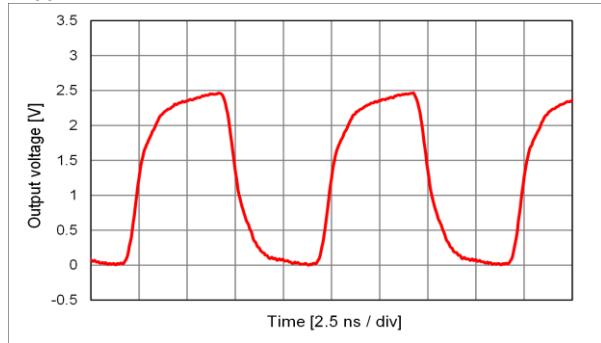


$V_{\text{CC}} = 1.8 \text{ V}$

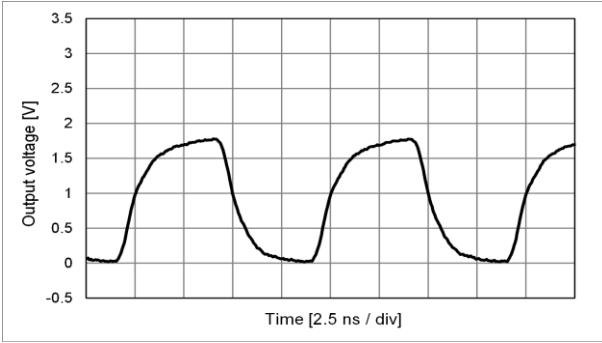


## (7-6) Output Waveform [cont'd]

$f_o = 125 \text{ MHz}$ ,  $L_{\text{CMOS}} = 15 \text{ pF}$ ,  $T_{\text{use}} = +25 \text{ }^\circ\text{C}$ , Rise/Fall time: A (Default) or C (Fast)

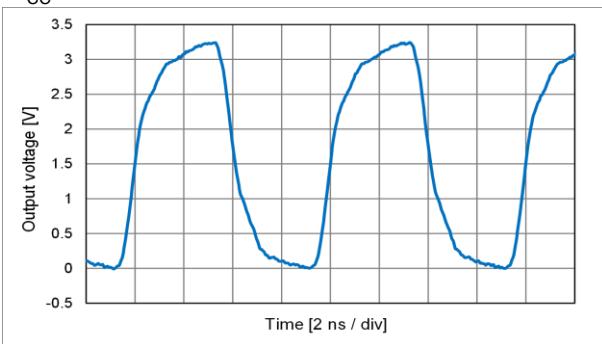
$V_{\text{CC}} = 3.3 \text{ V}$



$V_{\text{CC}} = 2.5 \text{ V}$

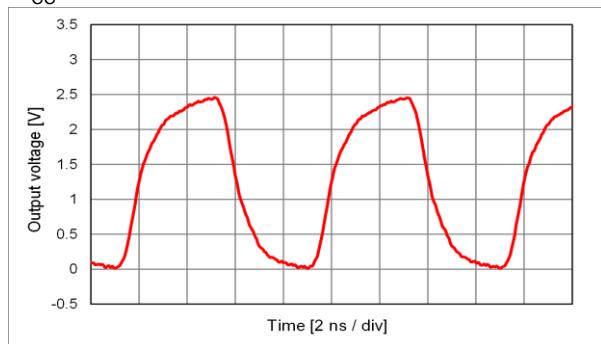


$V_{\text{CC}} = 1.8 \text{ V}$

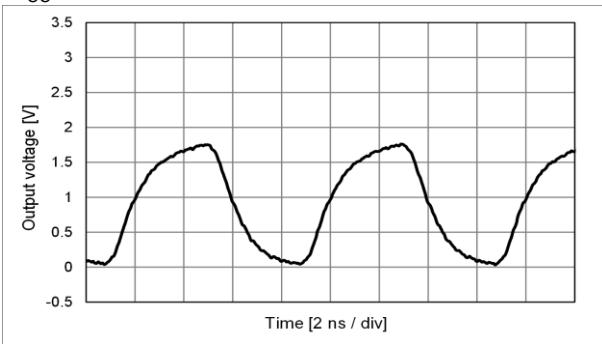

$f_o = 150 \text{ MHz}$ ,  $L_{\text{CMOS}} = 15 \text{ pF}$ ,  $T_{\text{use}} = +25 \text{ }^\circ\text{C}$ , Rise/Fall time: A (Default) or B (Faster)

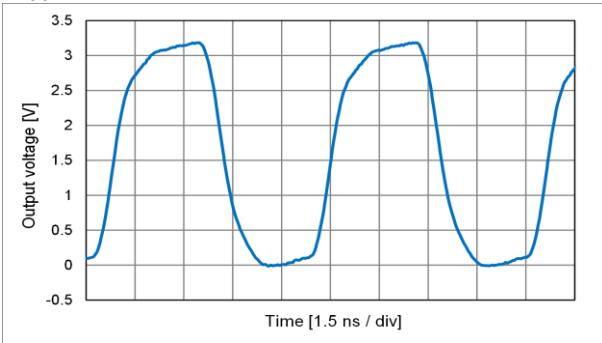
$V_{\text{CC}} = 3.3 \text{ V}$



$V_{\text{CC}} = 2.5 \text{ V}$



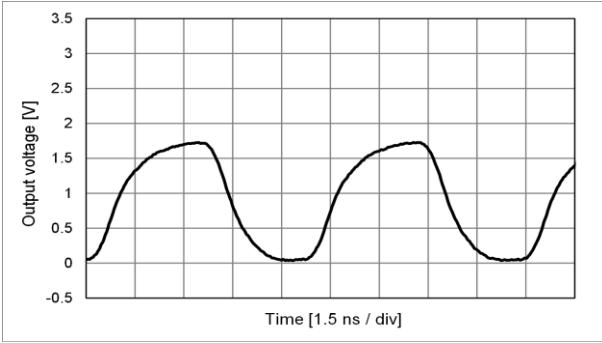
$V_{\text{CC}} = 1.8 \text{ V}$




## (7-6) Output Waveform [cont'd]

$f_o = 170$  MHz,  $L_{CMOS} = 15$  pF,  $T_{use} = +25$  °C, Rise/Fall time: A (Default) or B (Faster)

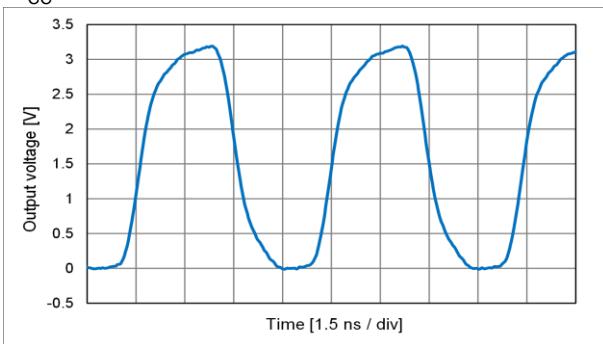
$V_{CC} = 3.3$  V




$V_{CC} = 2.5$  V

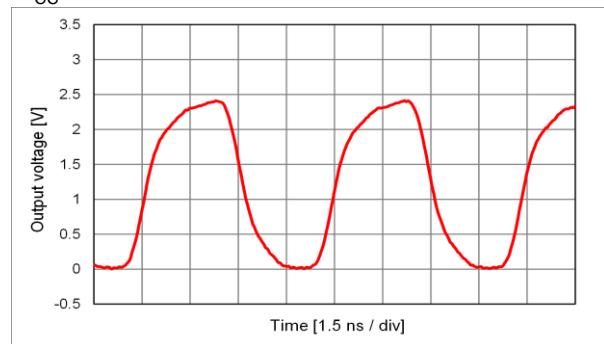

$V_{CC} = 1.8$  V

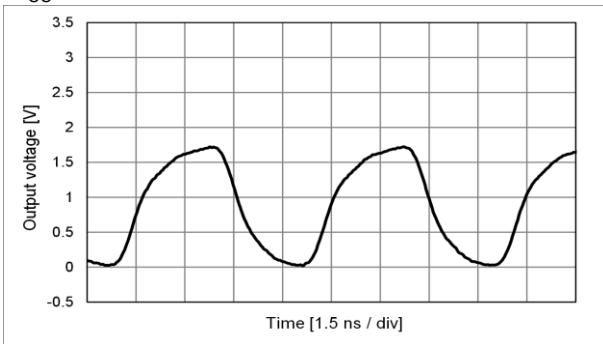


## (7-7) Phase Noise and Phase Jitter

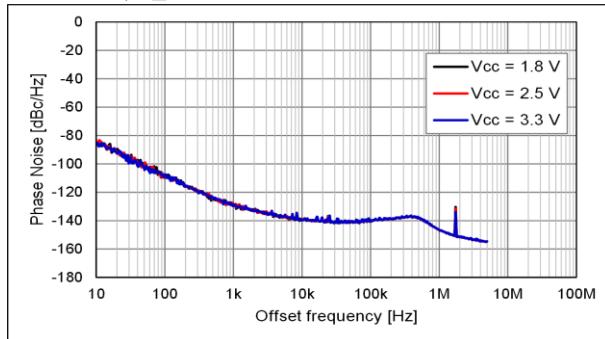 $f_0 = 25 \text{ MHz}$ ,  $T_{\text{use}} = +25 \text{ }^{\circ}\text{C}$ 


Phase jitter: 1.2 ps Typ.

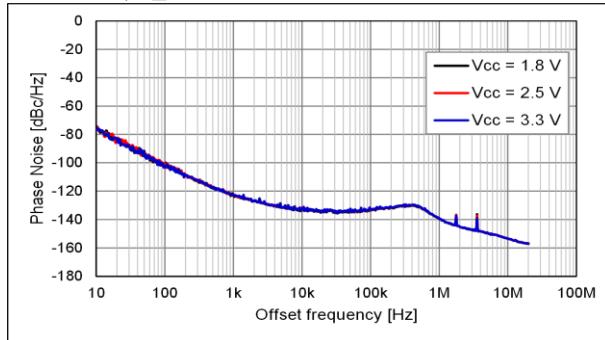Offset frequency: 12 kHz to 5 MHz

 $f_0 = 50 \text{ MHz}$ ,  $T_{\text{use}} = +25 \text{ }^{\circ}\text{C}$ 


Phase jitter: 1.2 ps Typ.

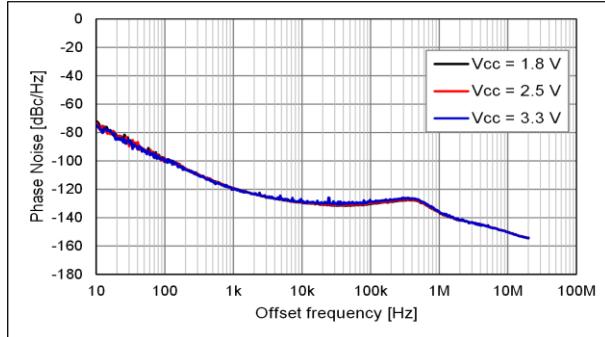Offset frequency: 12 kHz to 20 MHz

 $f_0 = 75 \text{ MHz}$ ,  $T_{\text{use}} = +25 \text{ }^{\circ}\text{C}$ 

Phase jitter: 1.2 ps Typ.

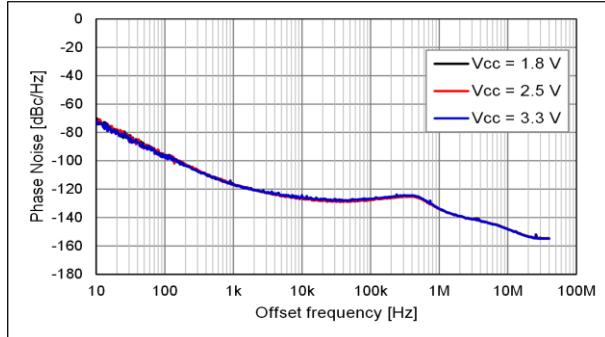
Offset frequency: 12 kHz to 20 MHz

 $f_0 = 100 \text{ MHz}$ ,  $T_{\text{use}} = +25 \text{ }^{\circ}\text{C}$ 

Phase jitter: 1.2 ps Typ.


Offset frequency: 12 kHz to 20 MHz

## (7-7) Phase Noise and Phase Jitter [cont'd]

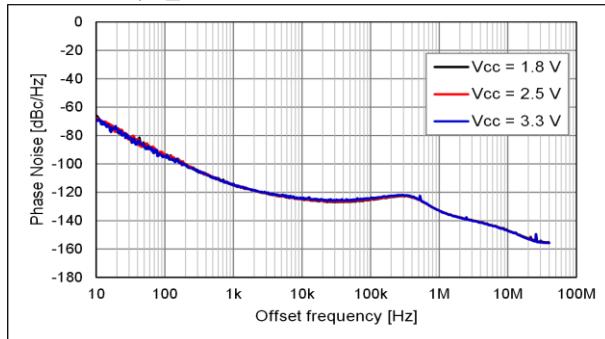 $f_0 = 125 \text{ MHz}$ ,  $T_{\text{use}} = +25 \text{ }^{\circ}\text{C}$ 


Phase jitter: 1.1 ps Typ.

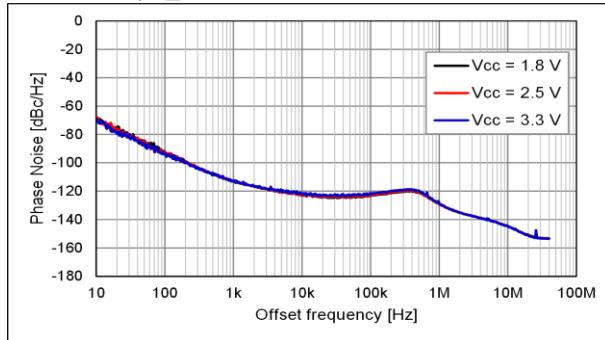Offset frequency: 12 kHz to 20 MHz

 $f_0 = 150 \text{ MHz}$ ,  $T_{\text{use}} = +25 \text{ }^{\circ}\text{C}$ 

Phase jitter: 1.4 ps Typ.

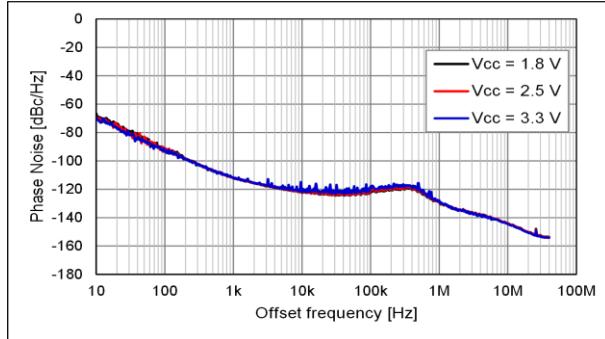Offset frequency: 12 kHz to 20 MHz



 $f_0 = 170 \text{ MHz}$ ,  $T_{\text{use}} = +25 \text{ }^{\circ}\text{C}$ 

Phase jitter: 1.5 ps Typ.


Offset frequency: 12 kHz to 20 MHz

## [ 8 ] Test Circuit
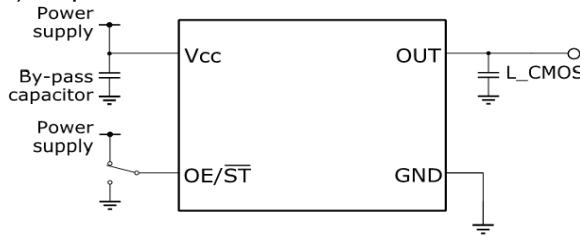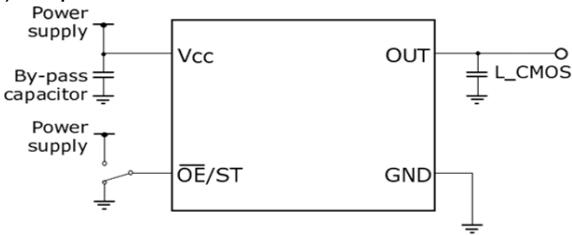
## (8-1) Waveform Observation


(1) #1 pin = OE/ $\overline{ST}$ (2) #1 pin =  $\overline{OE}/ST$ 

## (8-2) Current Consumption Test

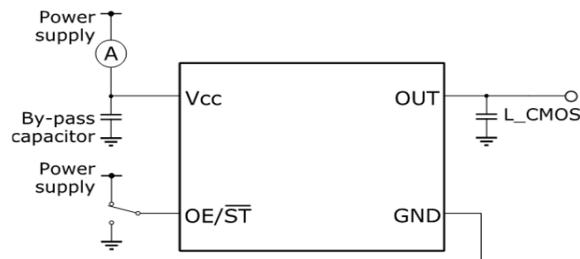(1) #1 pin = OE/ $\overline{ST}$ 

\* Disable current test should be OE = GND.


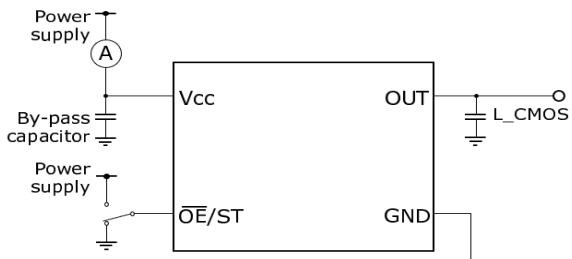
Stand-by current test should be  $\overline{ST}$  = GND.

(2) #1 pin =  $\overline{OE}/ST$ 

\* Disable current test should be  $\overline{OE}$  = V<sub>CC</sub>.

Stand-by current test should be ST = V<sub>CC</sub>.

## (8-3) Jitter (Peak to Peak, RMS, Cycle to Cycle)

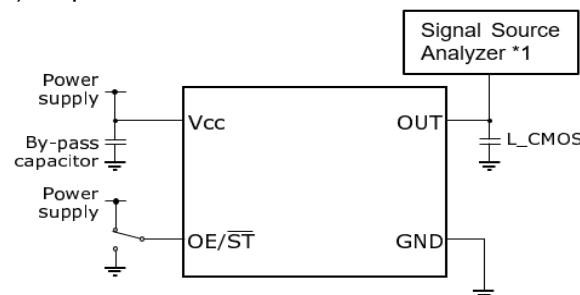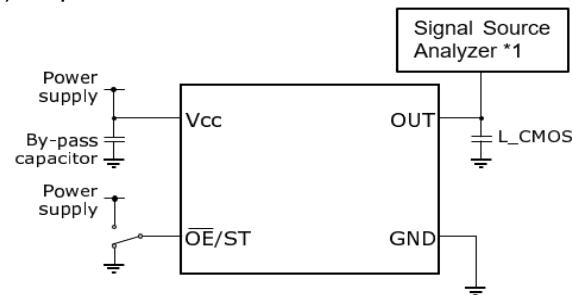(1) #1 pin = OE/ $\overline{ST}$ (2) #1 pin =  $\overline{OE}/ST$ 

\*1 Signal Source Analyzer: Keysight: E5052B, Minimum frequency = 10 MHz

## (8-4) Condition

## (1) Oscilloscope

The bandwidth should be minimum 5 times wider than measurement frequency

The probe ground should be placed closely to the test point and the lead length should be as short as possible

\* It is recommended to use miniature socket. (Don't use earth lead.)

(2) L<sub>CMOS</sub> includes probe capacitance.

(3) A 0.01  $\mu$ F to 0.1  $\mu$ F bypass capacitor should be connected between V<sub>CC</sub> and GND pins located close to the device

(4) Use a current meter with a low internal impedance

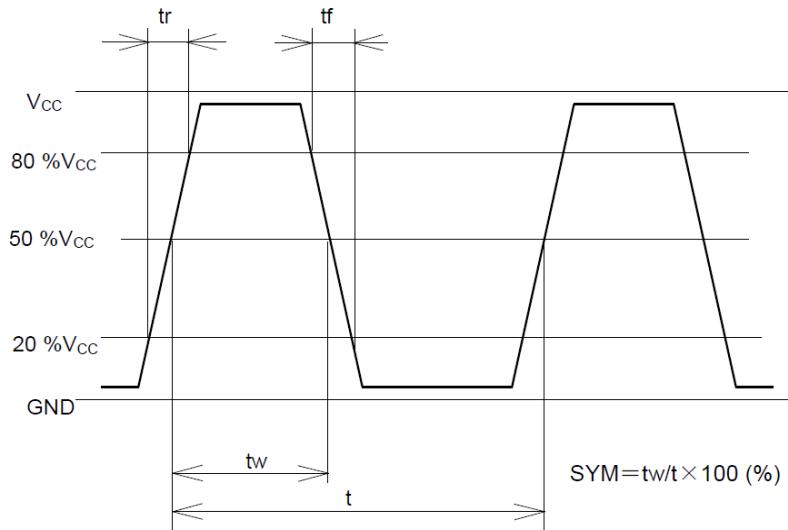
## (5) Power Supply

Power supply startup time (0 %V<sub>CC</sub>  $\rightarrow$  90 %V<sub>CC</sub>) should be between 5  $\mu$ s and 500 ms

Power supply impedance should be as low as possible and GND line should be as short as possible

## [ 9 ] Timing Chart


## (9-1) Output Waveform and Level



## (9-2) OE/ST Function and Timing

OE terminal	Osc. circuit	Output status
High or Open	Oscillation	Specified frequency: Enable
Low	Oscillation	Low (Weak pull down <sup>3</sup> ): Disable

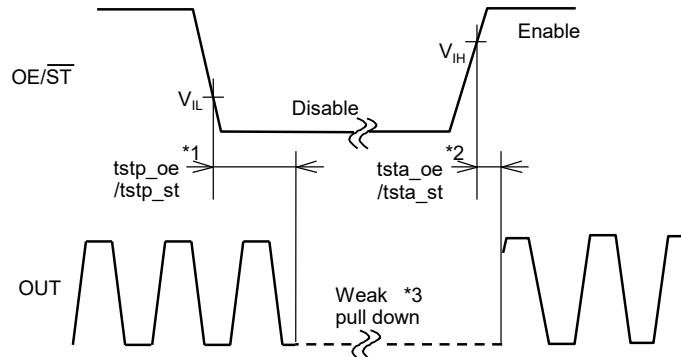ST terminal	Osc. circuit	Output status
High	Oscillation	Specified frequency: Enable
Low	Oscillation stop	Low (Weak pull down <sup>3</sup> ): Disable



\*1 The period from  $OE/\overline{ST} = V_{IL}$  to  $OUT =$  Disable (Low, weak pull down)

\*2 The period from  $OE/\overline{ST} = V_{IH}$  to  $OUT =$  Enable

\*3 Pulled down with Output pull down resistance ( $R_{DN}$ )

\* Judging the start of output when output waveform is observed.

\*  $OE/\overline{ST}$  terminal voltage level should not exceed supply voltage when using  $OE/\overline{ST}$  function.  
Please note that  $OE/\overline{ST}$  rise time should not exceed supply voltage rise time at the start-up.


\* Please do not use the  $\overline{ST}$  terminal with the open state.

If output should be enabled with the open state, please use Output Enable function.

(9-3)  $\bar{OE}/ST$  Function and Timing

$\bar{OE}$ terminal	Osc. circuit	Output status
Low or Open	Oscillation	Specified frequency: Enable
High	Oscillation	Low (Weak pull down <sup>*3</sup> ): Disable

ST terminal	Osc. circuit	Output status
Low	Oscillation	Specified frequency: Enable
High	Oscillation stop	Low (Weak pull down <sup>*3</sup> ): Disable

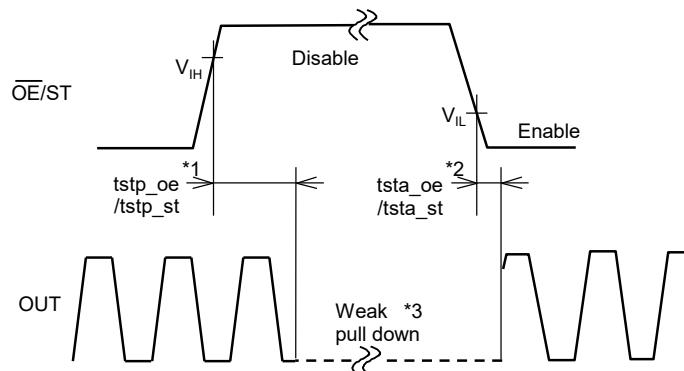

\*1 The period from  $\bar{OE}/ST = V_{IH}$  to  $OUT =$  Disable (Low, weak pull down)

\*2 The period from  $\bar{OE}/ST = V_{IL}$  to  $OUT =$  Enable

\*3 Pulled down with Output pull down resistance ( $R_{DN}$ )

\* Judging the start of output when output waveform is observed.


\*  $\bar{OE}/ST$  terminal voltage level should not exceed supply voltage when using  $\bar{OE}/ST$  function.

\* Please do not use the ST terminal with the open state.

If output should be enabled with the open state, please use Output Enable function.

## [ 10 ] Outline Drawing and Recommended Footprint

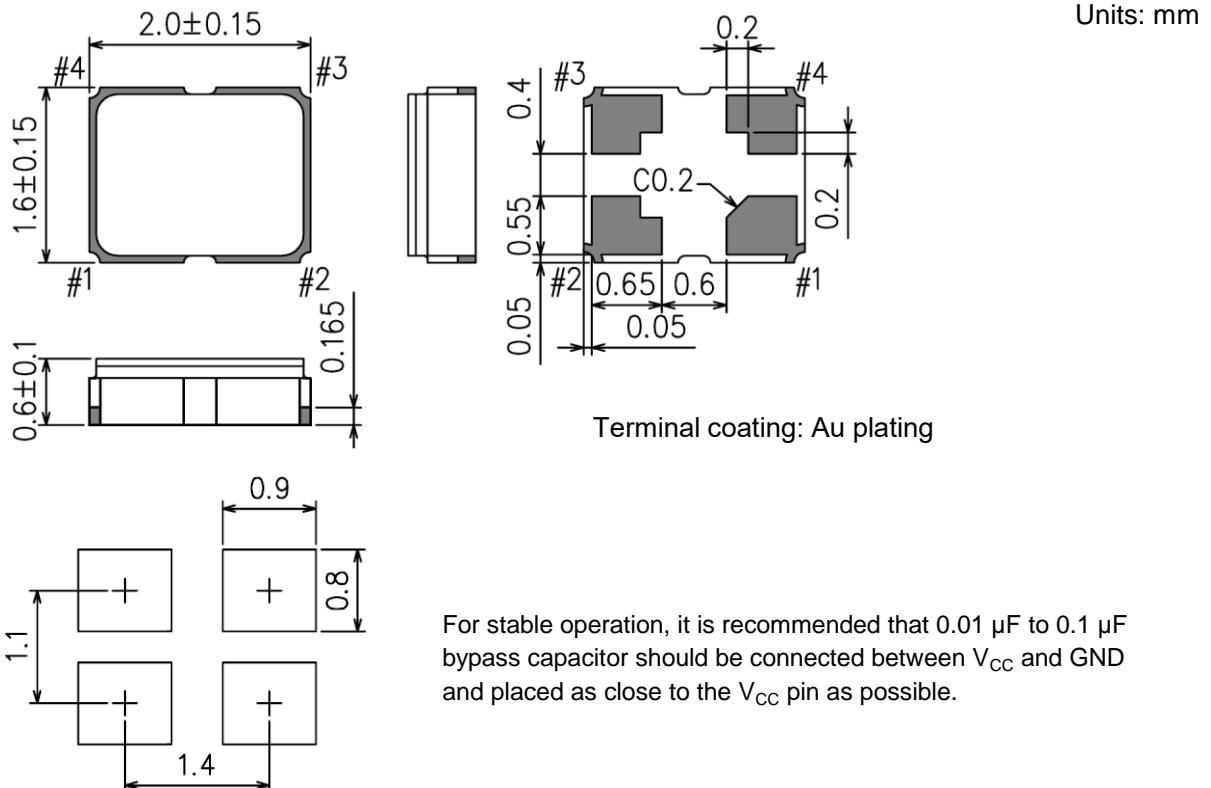(10-1) SG-8201CJ




Reference Weight Typ.: 7.3 mg

## Terminal Assignment

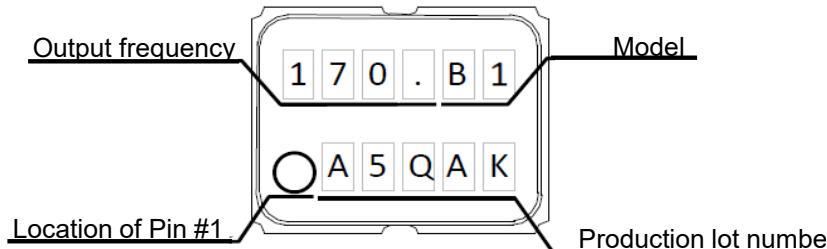Pin #	Name	Function	
#1	OE	Output Enable	High <sup>*1</sup> or Open: Specified frequency output from OUT pin Low: OUT pin is low (pull down with 500 kΩ), only output driver is disabled
	OE	Output Enable	Low <sup>*2</sup> or Open: Specified frequency output from OUT pin High: OUT pin is low (pull down with 500 kΩ), only output driver is disabled
	ST	Standby	High <sup>*1 *3</sup> : Specified frequency output from OUT pin Low: OUT pin is low (pull down with 500 kΩ) Device goes to standby mode. Supply current reduces to the least as I_std
	ST	Standby	Low <sup>*2 *3</sup> : Specified frequency output from OUT pin High: OUT pin is low (pull down with 500 kΩ) Device goes to standby mode. Supply current reduces to the least as I_std
#2	GND	Ground	
#3	OUT	Clock output	
#4	V <sub>CC</sub>	Power supply	


<sup>\*1</sup> If fixing it at High, please connect to V<sub>CC</sub> directly.<sup>\*2</sup> If fixing it at Low, please connect to GND directly.<sup>\*3</sup> If necessary to use Open, please select Output Enable function.

## Marking



## (10-2) SG-8201CG

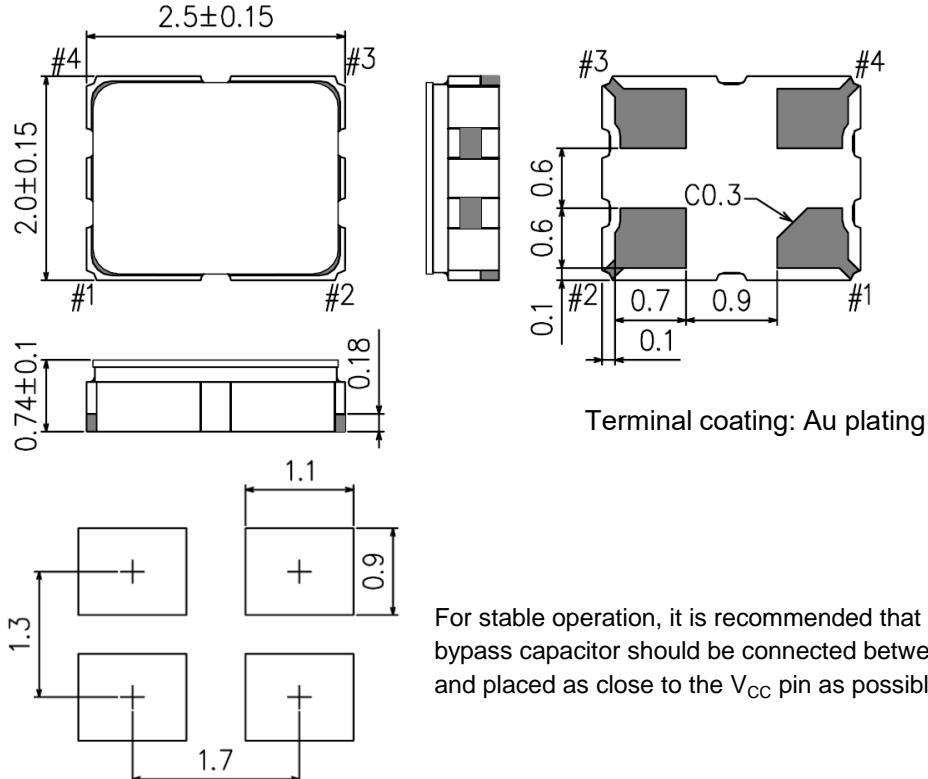Units: mm




Reference Weight Typ.: 12 mg

## Terminal Assignment

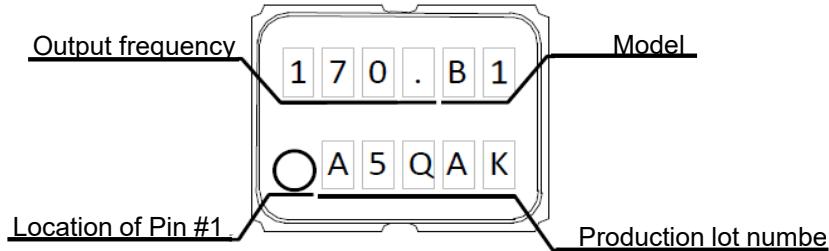Pin #	Name	Function	
#1	OE	Output Enable	High <sup>*1</sup> or Open: Specified frequency output from OUT pin Low: OUT pin is low (pull down with 500 k $\Omega$ ), only output driver is disabled
	$\bar{OE}$	Output Enable	Low <sup>*2</sup> or Open: Specified frequency output from OUT pin High: OUT pin is low (pull down with 500 k $\Omega$ ), only output driver is disabled
	$\bar{ST}$	Standby	High <sup>*1 *3</sup> : Specified frequency output from OUT pin Low: OUT pin is low (pull down with 500 k $\Omega$ ) Device goes to standby mode. Supply current reduces to the least as I_std
	ST	Standby	Low <sup>*2 *3</sup> : Specified frequency output from OUT pin High: OUT pin is low (pull down with 500 k $\Omega$ ) Device goes to standby mode. Supply current reduces to the least as I_std
#2	GND	Ground	
#3	OUT	Clock output	
#4	$V_{CC}$	Power supply	

<sup>\*1</sup> If fixing it at High, please connect to  $V_{CC}$  directly.<sup>\*2</sup> If fixing it at Low, please connect to GND directly.<sup>\*3</sup> If necessary to use Open, please select Output Enable function.

## Marking




## [ 11 ] Moisture Sensitivity Level

Parameter	Specification	Conditions
MSL	LEVEL 1	IPC/JEDEC J-STD-020D.1

## [ 12 ] Reflow Profiles

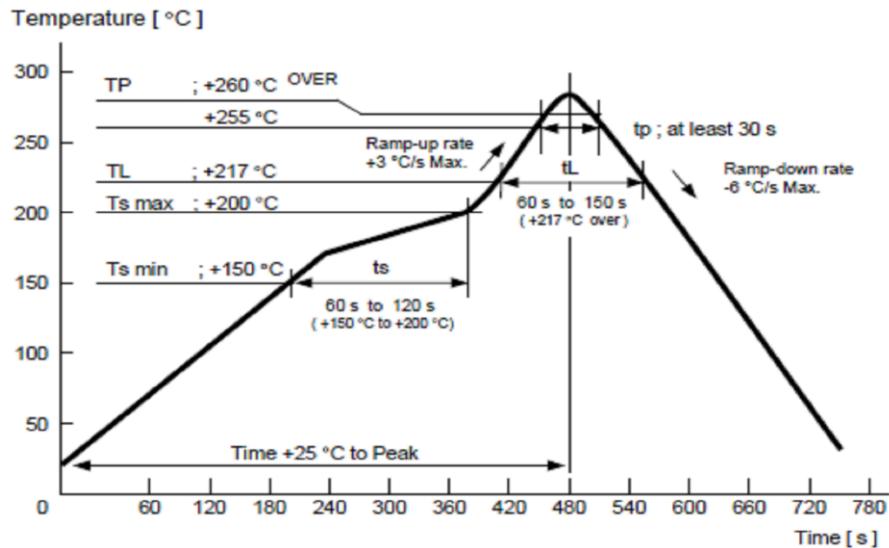IPC/JEDEC J-STD-020D.1



## [ 13 ] Packing Information

## (13-1) SG-8201CJ

## (1) Packing Quantity

The last two digits of the Product Number (X1G005981xxxx~~xx~~) are a code that defines the packing quantity. The standard is "16" for a 3 000 pcs/Reel.

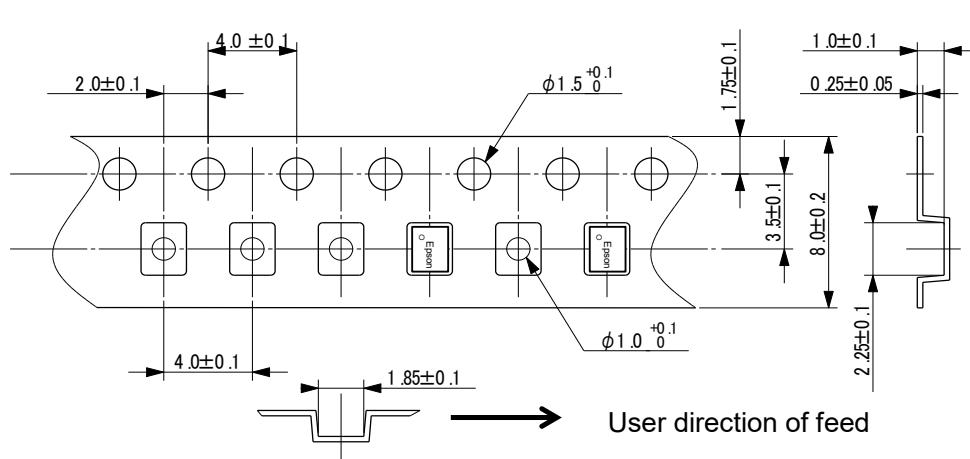
## (2) Taping Specification

Subject to EIA-481, IEC-60286 and JIS C0806

## 1) Tape Dimensions

Carrier Tape Material: PS (Polystyrene)


Top Tape Material: PET (Polyethylene Terephthalate) + PE (Polyethylene)



Units: mm

## 2) Reel Dimensions

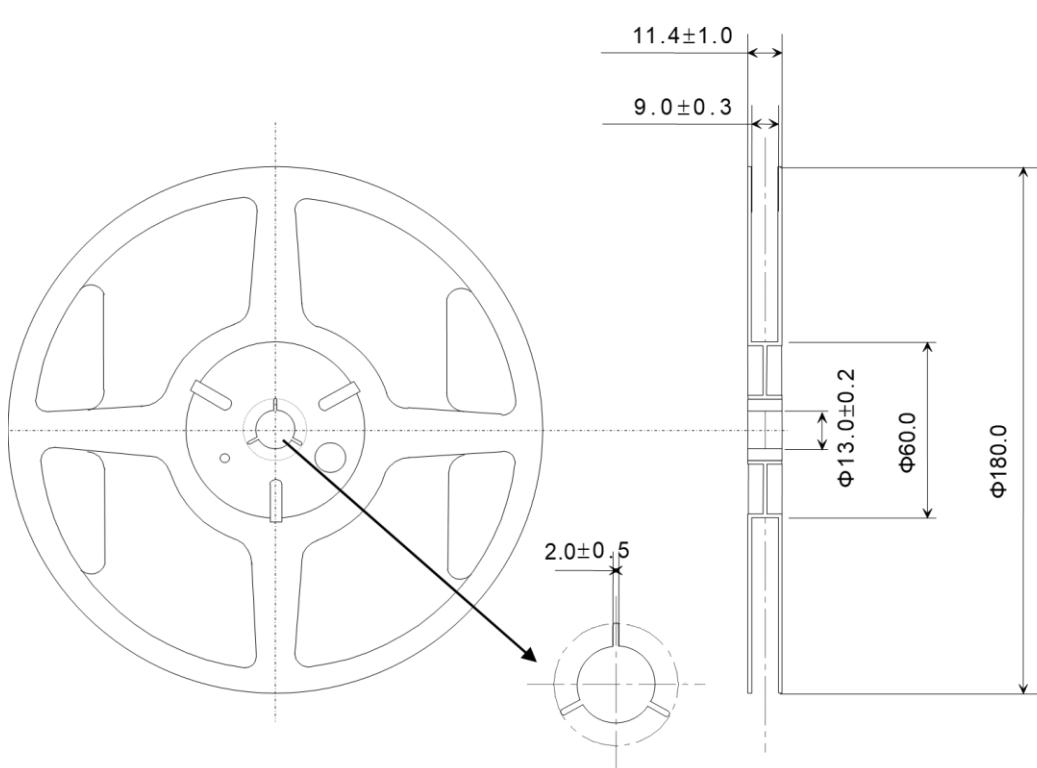Reel Material: PS (Polystyrene)



Units: mm

## 3) Storage Environment

We recommend to keep less than +30 °C and 85 %RH of humidity in a packed condition, and to use it less than 6 months after delivery.

## (13-2) SG-8201CG

## (1) Packing Quantity

The last two digits of the Product Number (X1G006191xxxx~~xx~~) are a code that defines the packing quantity. The standard is "16" for a 3 000 pcs/Reel.

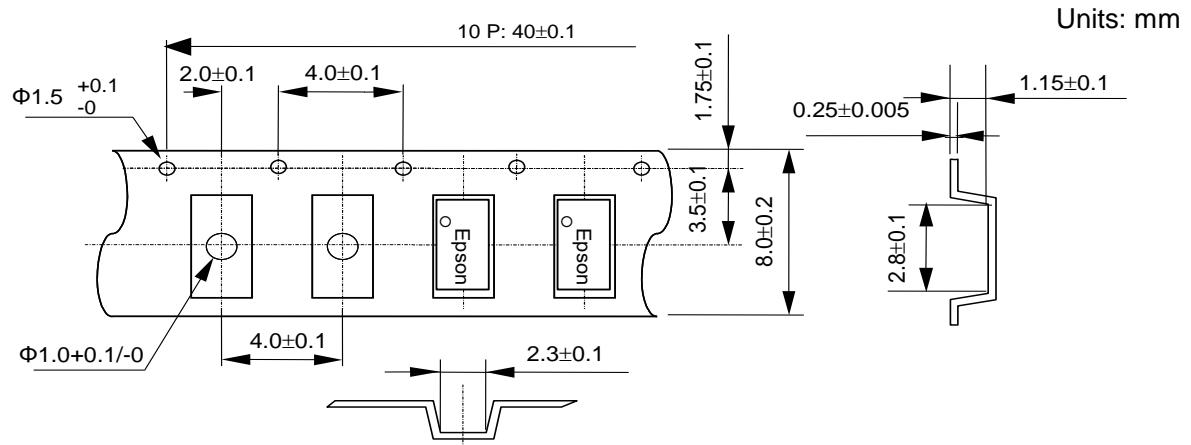
## (2) Taping Specification

Subject to EIA-481, IEC-60286 and JIS C0806

## 1) Tape Dimensions


Carrier Tape Material: PS (Polystyrene)

Top Tape Material: PET (Polyethylene Terephthalate) + PE (Polyethylene)



## 2) Reel Dimensions

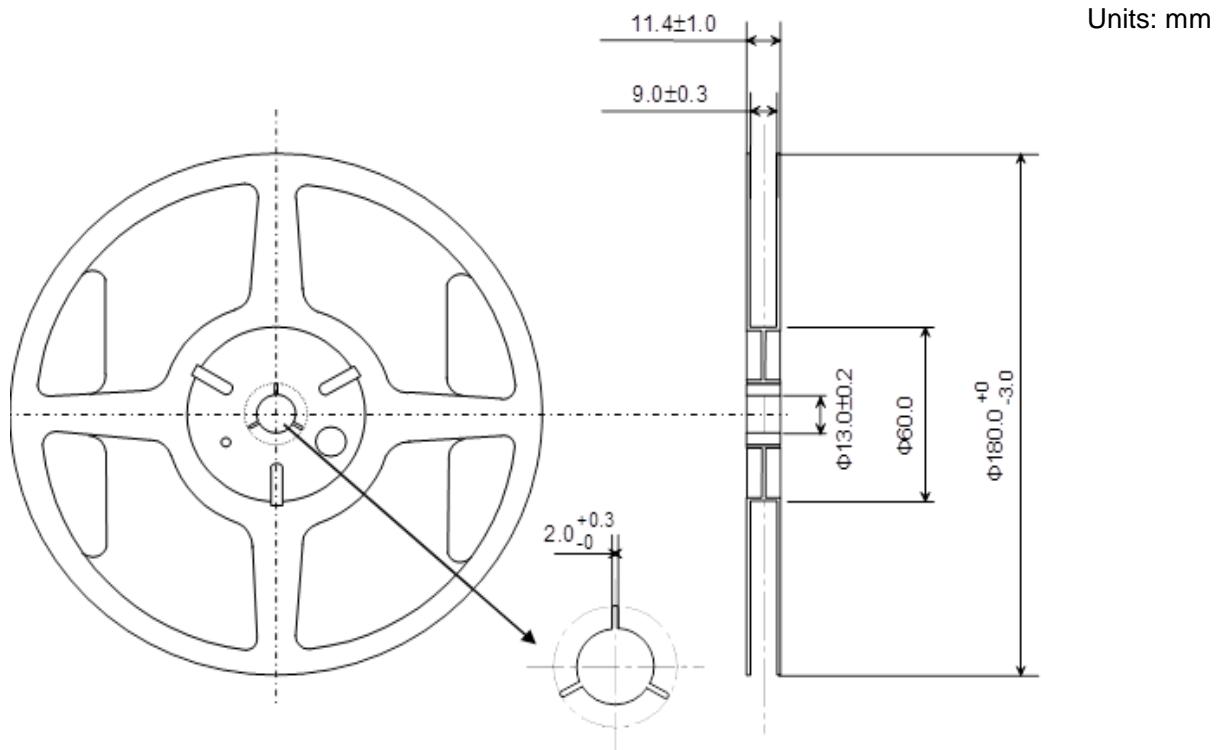Reel Material: PS (Polystyrene)



## 3) Storage Environment

We recommend to keep less than +30 °C and 85 %RH of humidity in a packed condition, and to use it less than 6 months after delivery.

## [ 14 ] Handling Precautions

Prior to using this product, please carefully read the section entitled "Precautions" on our Web site (<https://www5.epsondevice.com/en/information/#precaution>) for instructions on how to handle and use the product properly to ensure optimal performance of the product in your equipment.

Before using the product under any conditions other than those specified therein, please consult with us to verify and confirm that the performance of the product will not be negatively affected by use under such conditions.

In addition to the foregoing precautions, in order to avoid the deteriorating performance of the product, we strongly recommend that you DO NOT use the product under ANY of the following conditions:

- (1) Do not expose this product to excessive mechanical shock or vibration.
- (2) This product can be damaged by mechanical shock during the soldering process depending on the equipment used, process conditions, and any impact forces experienced. Always follow appropriate procedures, particularly when changing the assembly process in any way and be sure to follow applicable process qualification standards before starting production.
- (3) These devices are sensitive to ESD, use appropriate precautions during handling, assembly, test, shipment, and installation.
- (4) The use of ultrasonic technology for cleaning, bonding, etc. can damage the Xtal unit inside this product. Please carefully check for this consideration before using ultrasonic equipment for volume production with this product.
- (5) Noise and ripple on the power supply may have undesirable affects on operation and cause degradation of phase noise characteristics. Evaluate the operation of this device with appropriate power supplies carefully before use.
- (6) When applying power, ensure that the supply voltage increases monotonically for proper operation. On power down, do not reapply power until the supplies, bypass capacitors, and any bulk capacitors are completely discharged since that may cause the unit to malfunction.
- (7) Aging specifications are estimated from environmental reliability tests and expected frequency variation over time. They do not provide a guarantee of aging over the product lifecycle.
- (8) The metal cap on top of the device is directly connected to the GND terminal. Take necessary precautions to prevent any conductor not at ground potential from contacting the cap as that could cause a short circuit to GND.
- (9) To avoid any issues due to interference of other signal lines, please take care not to place signal lines near the product as this may have an adverse affect on the performance of the product.
- (10) A bypass capacitor of the recommended value(s) must be connected between the V<sub>CC</sub> and GND terminals of the product. Whenever possible, mount the capacitor(s) on the same side of the PCB and as close to the product as possible to keep the routing traces short.
- (11) Power supply connections to V<sub>CC</sub> and GND pins should be routed as thick as possible while keeping the high frequency impedance low in order to get the best performance.
- (12) The use of a filter or similar element in series with the power supply connections to protect from electromagnetic radiation noise may increase the high frequency impedance of the power supply line and may cause the oscillator to not operate properly. Please verify the design to ensure sufficient operational margin prior to use.
- (13) Keep PCB routing from the output terminal(s) to the load as short as possible for best performance.
- (14) The Enable (OE/̄OE/ST/̄ST) input terminal is high impedance and so susceptible to noise. Connect it to a low impedance source when used and when not used it is recommended to connect it to Vcc for OE/̄ST inputs and GND for ̄OE/ST inputs.
- (15) Do not short the output to GND as that will damage the product. Always use with an appropriate load resistor connected.
- (16) This product should be reflowed no more than 3 times.

### [Availability of mounting conditions]

Reflow on the board	Available
Reflow under the board	The parts may fall. Please judge whether it is possible to implement.
Soldering pot/bath (Dip soldering system, Flow soldering system)	<b>Not Available</b>
Soldering iron	Available

- (17) Product failures during the warranty period only apply when the product is used according to the recommended operating conditions described in the specifications. Products that have been opened for analysis or damaged will not be covered. It is recommended to store and use in normal temperature and humidity environments described in the specifications to ensure frequency accuracy and prevent moisture condensation. If the product is stored for more than one year, please confirm the pin solderability prior to use.
- (18) If the oscillation circuit is exposed to condensation, the frequency may change or oscillation may stop. Do not use in any conditions where condensation occurs.
- (19) Do not store or use the product in an environment where it can be exposed to chemical substances that are corrosive to metal or plastics such as salt water, organic solvents, chemical gasses, etc. Do not use the product when it is exposed to sunlight, dust, corrosive gasses, or other materials for long periods of time.
- (20) When using water-soluble solder flux make sure to completely remove the flux residue after soldering. Pay particular attention when the residues contain active halogens which will negatively affect the product and its performance.
- (21) Terminals on the side of the product are internally connected to the IC, be careful not to cause short-circuits or reduce the insulation resistance of them in any way.
- (22) Precautions for PLL cascade connection  
This product uses a PLL (Phase Locked Loop) circuit to synthesize the required output frequency from the crystal oscillation. Therefore, if the output of this oscillator is further cascaded into a PLL, the jitter of the PLL may become large. Especially for applications such as image processing and communication synchronization, please be sure to check and approve it in advance.
- (23) Should any customer use the product in any manner contrary to the precautions and/or advice herein, such use shall be done at the customer's own risk.

## PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

## WORKING FOR HIGH QUALITY

In order to provide high quality and reliable products and services that meet customer needs, Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired IATF 16949 certification that is requested strongly by major manufacturers as standard.

### ■ Explanation of marks used in this datasheet

	●Pb free.
	<p>●Complies with EU RoHS directive.  <small>*About the products without the Pb-free mark.</small>          Contains Pb in products exempted by EU RoHS directive          (Contains Pb in sealing glass, high melting temperature type solder or other)</p>

### NOTICE: PLEASE READ CAREFULLY BELOW BEFORE THE USE OF THIS DOCUMENT

1. The content of this document is subject to change without notice. Before purchasing or using Epson products, please contact with sales representative of Seiko Epson Corporation ("Epson") for the latest information and be always sure to check the latest information published on Epson's official web sites and resources.
2. This document may not be copied, reproduced, or used for any other purposes, in whole or in part, without Epson's prior consent.
3. Information provided in this document including, but not limited to application circuits, programs and usage, is for reference purpose only. Epson makes no guarantees against any infringements or damages to any third parties' intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, any intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
4. Epson has prepared this document carefully to be accurate and dependable, but Epson does not guarantee that the information is always accurate and complete. Epson assumes no responsibility for any damages you incurred due to any misinformation in this document.
5. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed. regarding Epson products (including, but not limited to this document, specifications, data sheets, manuals, and Epson's web site). Using technical contents such as product data, graphic and chart, and technical information, including programs, algorithms and application circuit examples under this document, you shall evaluate your products thoroughly both in stand-alone basis and within your overall systems. You shall be solely responsible for deciding whether to adopt/use Epson products with your products.
6. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document or for any damages (whether direct or indirect) incurred by any third party that you give, transfer or assign Epson products.
7. For more details or other concerns about this document, please contact our sales representative.
8. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

#### ●Disclaimer

1. Epson products are designed for use in general electronic equipment applications that do not require extremely high reliability or safety.
2. Epson does not represent or warrant that its products will not cause a failure for any particular application, except for cases where the failure is a direct result caused by defects in materials and workmanship of this product. If a product fails due to defects in materials and workmanship, to the maximum extent permitted by law, we will, at our sole discretion, refund or replace the affected product.
3. When products for used directly or indirectly in certain devices or applications (ex. Nuclear power, aerospace, infrastructure facilities, medical equipment, etc.) which are connected to or affect safety of human life or property, Customer is solely responsible for determining Customer shall implement necessary and proper safety design and measures (including redundant design, malfunction prevention design, etc.) to ensure reliability and safety before using the products in/with customer's Equipment.
4. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed. Furthermore, any defects caused by this are not covered by the warranty.

©Seiko Epson Corporation 2025

IATF 16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.