





CITEL

DATA LINE SPD - UL497B - I_{max} 1kA - I_n 1kA

DD15-24V



- Data Line Surge Protector for RS Networks • 9, 15 and 25-Pin D-Sub Connectors • Supports Data Rates Up to 40Mbps • Fast and Easy Installation • Ideal for Equipment Level Protection • UL497B Listed

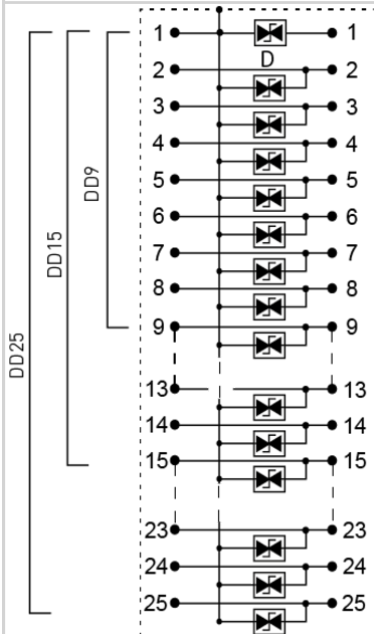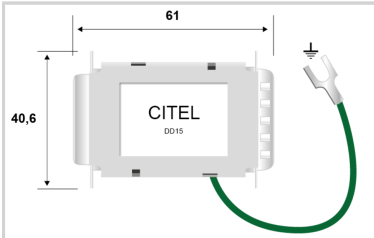

D: Clamping diode

Electrical Characteristics		
Network		RS232, RS485, 4-20mA
Max. DC operating voltage	Uc	40 Vdc
Max. frequency	f max.	> 10 MHz
Max. data rate		< 40 Mbps
Insertion loss		< 1 dB
Max. load current @25°C	IL	750 mA
Nominal discharge current C2 Category	I _n	5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	I _n L/PE	300 A
Total Maximum discharge current max. total withstand @ 8/20 µs	I _{max} Total	20 kA
Protection mode(s)		Common/Differential mode
Protection Level C3 (10/1000µs), 300 applications@10 A, X-X (Line/Line)	Up	18 V
Protection Level C3 (10/1000µs), 300 applications@10 A, X-C (Line/Earth)	Up	20 V
Max. capacitance	C	< 30 pF
Impulse current 2 x 10/350µs Test - D1 Category	I _{imp}	2.5 kA
Capacitance @1MHz, X-C (Line/Earth)	C	< 500 pF
DATA SPD TYPE		UL497B LISTED
VOLTS	(V)	24
WIRES		15W+GROUND
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-50
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	20
MCOV	(V)	28/
IMAX 8/20µs	(kA)	1
I _{imp} 10/350µs	(kA)	
DATA SPEED	(Mbps)	up to 10MHz
Installation		
Operating Temperature _{Min}	°C	-40.0000
Operating Temperature _{Max}	°C	85.0000
Operating Temperature _{Min}	°F	-40.0000
Operating Temperature _{Max}	°F	85.0000
Operating Relative Humidity _{Max}	%RH	95
Operating Altitude _{Min}	Ft	2000.0000
Operating Altitude _{Max}	Ft	6500.0000
Housing/Enclosure material		Thermoplastic
Flammability ratingUL 94		V0
Mounting		D-Sub connector
IP Environmental rating/IP		IP20
Installation Location		Indoor
Accessories		90° Stainless steel bracket
Product DimensionL	mm	61.0000
Product DimensionW	mm	40.6000
Product DimensionL	In	2.4000
Product DimensionW	In	1.5900
Miscellaneous		
Individual Pack		Yes
Storage Temperature _{Min}	°C	-40.0000
Storage Temperature _{Max}	°C	85.0000
Storage Temperature _{Min}	°F	-40.0000
Storage Temperature _{Max}	°F	85.0000
Storage Relative Humidity _{Max}	%RH	95.0000



CITEL

DATA LINE SPD - UL497B - I_{max} 1kA - In 1kA

DD15-24V

Installation	
Cable type	Serial cable
Mechanical Characteristics	
Technology	Diode écrêtage
Connection to Network	D-Sub 15 pts male/female Input/output
Format	In/out D-Sub connector unit
Failsafe mode	Short-circuit - transmission cut-off - fault mode 2
Pinout	all wires transmitted and protected
TECHNOLOGY	SAD
NETWORK CONFIGURATION	15W+G
CONNECTION METHOD	15-pin D-Sub connector
MOUNTING	SURFACE MOUNT
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DIMENSIONS	See diagram
WEIGHT	0.30 lbs
SPARE PART	n/a
Standards	
Certification	UL 497B
UL STANDARD	UL497B
UL CATEGORY	QVGQ
UL FILE NUMBER	E184939
STANDARDS	IEC 61643-21
ENVIRONMENTAL STANDARDS	ROHS
Part number	
6214	

