

Precision Metal Film Resistors

OBSOLETE

GP Series

- Meets requirements of MIL-R-10509
- Flame-retardant coatings are standard
- 10 ohm - 10 megohm resistance range
- Resistance range tolerance of $\pm 0.1\%$ - 1%
- Temperature coefficients from ± 25 to $\pm 100\text{ppm}/^\circ\text{C}$



All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical Data

| IRC Type | IRC Power Rating (watts) | | MIL Reference | Maximum Working Voltage | Resistance Temperature Coefficient ($\pm\text{ppm}/^\circ\text{C}$) | Tolerance & Resistance Range | | | | | |
|------------|--------------------------|---------|---------------|-------------------------|---|------------------------------|---------------------|---------------------------|--|--|--|
| | @ 70°C | @ 125°C | | | | +1% | $\pm 5\%$ | $\pm .25$ and $\pm 0.1\%$ | | | |
| | | | | | | | | | | | |
| GP-50 (T0) | 1/8 | 1/10 | RN50 | 200 | 100 | 10 - 2.37 Meg | 10 ohm - 499K ohm | 100 ohm - 100K ohm | | | |
| GP-50 (T2) | 1/8 | 1/10 | RN50 | 200 | 50 | 10 ohm - 1 Meg | 10 ohm - 499K ohm | 100 ohm - 100K ohm | | | |
| GP-50 (T9) | 1/8 | 1/10 | RN50 | 200 | 25 | 49.9 ohm - 499K ohm | 49.9 ohm - 499K ohm | 100 ohm - 100K ohm | | | |
| GP-55 (T0) | 1/4 | 1/8 | RN55 | 250 | 100 | 10 ohm - 10 Meg | 10 ohm - 499K ohm | 30 ohm - 300K ohm | | | |
| GP-55 (T2) | 1/4 | 1/8 | RN55 | 250 | 50 | 10 ohm - 4.99 Meg | 10 ohm - 499K ohm | 30 ohm - 300K ohm | | | |
| GP-55 (T9) | 1/4 | 1/8 | RN55 | 250 | 25 | 30 ohm - 499K ohm | 30 ohm - 499K ohm | 30 ohm - 300K ohm | | | |
| GP-60 (T0) | 1/2 | 1/4 | RN60 | 350 | 100 | 10 ohm - 10 Meg | 10 ohm - 499K ohm | 100 ohm - 100K ohm | | | |
| GP-60 (T2) | 1/2 | 1/4 | RN60 | 350 | 50 | 10 ohm - 4.99 Meg | 10 ohm - 499K ohm | 100 ohm - 100K ohm | | | |
| GP-60 (T9) | 1/2 | 1/4 | RN60 | 350 | 25 | 49.9 ohm - 499K ohm | 49.9 ohm - 499K ohm | 100 ohm - 100K ohm | | | |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

www.ttelectronics.com/resistors

OBsolete

Environmental Data

| Environmental (% ΔR) | MIL-R-10509 | | Char. C | EIA RS-196 Class 1 |
|--------------------------------------|---------------------------------|-----------------|-----------------|-----------------------|
| | Typical | Char. D | | |
| Moisture Resistance | ± 0.5 | ± 1.5 | ± 0.5 | ± 1.5 |
| Thermal Shock | ± 0.25 | ± 0.5 | ± 0.25 | - |
| Load life @ 70°C - 1000 hours | ± 0.5 | ± 1.0 | ± 0.5 | ± 2.0 |
| Shock and Vibration | ± 0.25 | ± 0.5 | ± 0.25 | - |
| Resistance to Soldering Heat | ± 0.1 | ± 0.5 | ± 0.1 | - |
| Terminal Strength | ± 0.2 | ± 0.2 | ± 0.2 | - |
| Dielectric Withstand Voltage | ± 0.25 | ± 0.5 | ± 0.25 | ± 0.5 |
| Short Time Overload | ± 0.25 | ± 0.5 | ± 0.25 | ± 0.5 |
| Operating Temperature Range | -55°C to +165°C | -55°C to +165°C | -55°C to +165°C | |
| Maximum Pulse Voltage | GP50 400V, GP55 500V, GP60 600V | | | |
| Insulation Resistance | 10,000 meg min. | | | |
| Voltage Coefficient | 100ppm/V | | | |


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

www.ttelelectronics.com/resistors


Physical Data

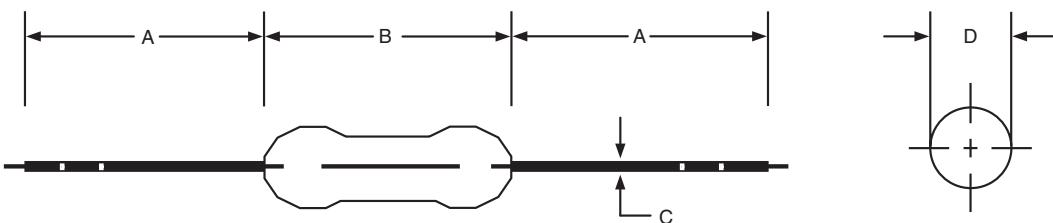

Dimensions (inches and (mm))

| Dimension | GP50 | GP55 | GP60 |
|-----------|-----------------------------------|----------------------------|----------------------------|
| A | 1.10 ± .08 (28.0 ± 2.0) | 1.10 ± .08 (28.0 ± 2.0) | 1.10 ± .08 (28.0 ± 2.0) |
| B | 0.13 + .01/-0.00 (3.2 + 0.2/-0.0) | 0.24 ± .01 (6.0 ± 0.3) | 0.33 ± .02 (8.5 ± 0.5) |
| C | 0.018 ± .001 (0.45 ± 0.02) | 0.023 ± .002 (0.60 ± 0.05) | 0.027 ± .002 (0.70 ± 0.05) |
| D | 0.073 ± .006 (1.85 ± 0.15) | 0.09 ± .01 (2.4 ± 0.2) | 0.11 ± .01 (2.8 ± 0.3) |

Construction

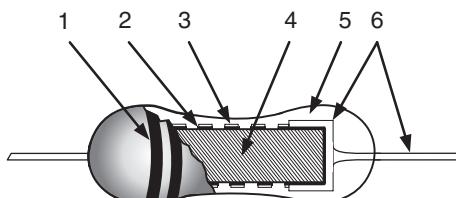

1. COLOR BANDS.

The resistors are permanently color banded for resistance value and tolerance in accordance with EIA specifications.

2. HELIXING.

The units are helixed to a predetermined base to final value ratio to obtain the best TCR, noise and stability characteristics.

3. FILM.

Metal-film resistors have a homogeneous film of metal alloy applied by vacuum deposition.

4. SUBSTRATES.

The substrates are of a proprietary non alkaline ceramic, prepared and processed under exacting conditions to guarantee the utmost in uniformity and surface characteristics.

5. INSULATION.

The resistors are coated with multiple layers of a baked-on fire-retardant synthetic resin which provides the units with a high degree of mechanical and electrical protection in the most adverse operating conditions.

6. TERMINATIONS.

Positive contact is provided to the resistance element by precision-made end caps. The lead wires are attached by using proprietary welding techniques.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.


All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn


www.ttelectronics.com/resistors

Performance Curves


High-Frequency Characteristics (Typical)

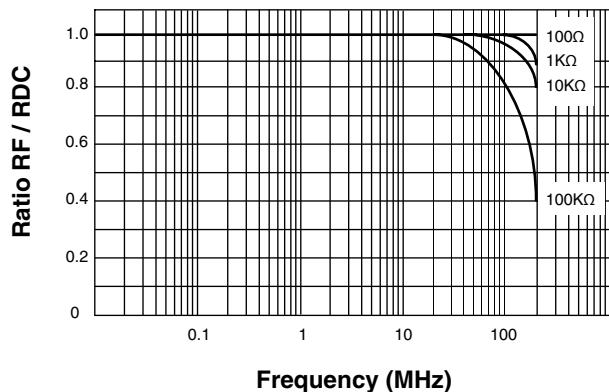

Derating Curve (Typical)

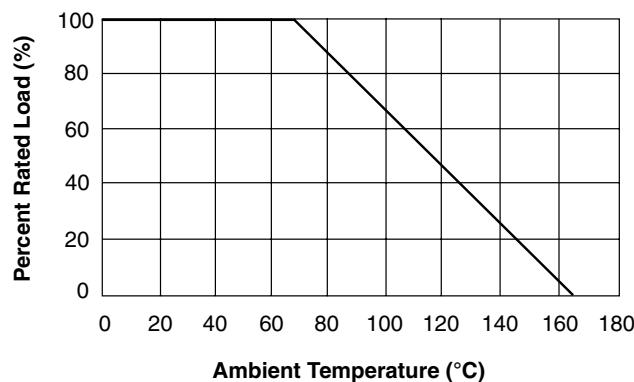

Current Noise (Typical)

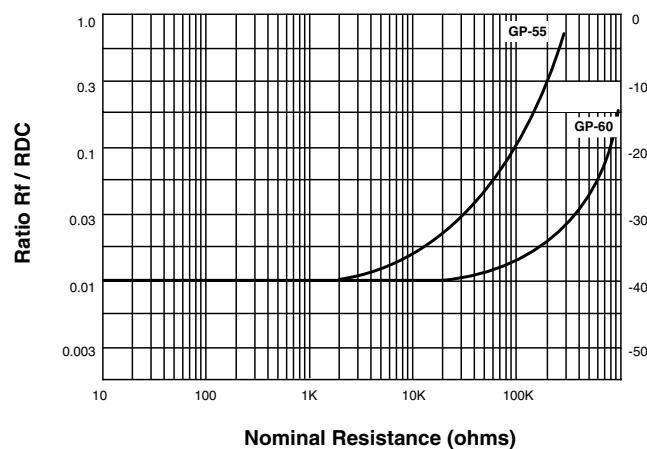

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

www.ttelectronics.com/resistors

Ordering Procedure

Example: GP551001001FLFLTR (GP55 with TCR = $\pm 100\text{ppm}/^\circ\text{C}$ at 1 kilohm $\pm 1\%$, Pb-free)

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| G | P | 5 | 5 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | F | L | F | L | T | R |
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | | | | | | |

| 1 Type | 2 TCR | 3 Value | 4 Tolerance | 5 Finish | 6 Packing |
|-----------|--------------------------------|-----------------------------------|------------------|--------------|-------------------|
| GP50 | 25 = 25ppm/ $^\circ\text{C}$ | 3 digits + multiplier | B = $\pm 0.1\%$ | LF = Pb-free | LTR = Tape & reel |
| GP55 | 50 = 50ppm/ $^\circ\text{C}$ | R = ohms for values < 100 ohms | C = $\pm 0.25\%$ | | |
| GP60 | 100 = 100ppm/ $^\circ\text{C}$ | | D = $\pm 0.5\%$ | | |
| | | | F = $\pm 1\%$ | | |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

www.ttelectronics.com/resistors