



**Fair-Rite Products Corp.**

Your Signal Solution®



# Multi-Aperture cores (2868015302)



Part Number: 2868015302

68 MULTI-APERTURE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

**Multi-aperture cores are used in suppression applications and in balun (balance-unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.**

All multi-aperture cores are supplied burnished.

Our "Multi-Aperture Core Kit" (part number 0199000036) is available for prototype evaluation.

**For any multi-aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

[Catalog Drawing](#)

[3D Model](#)

**Weight:** 18.2 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	20.00	$\pm 0.40$	0.787	—
B	25.40	$\pm 0.70$	1.00	—
C	9.80	$\pm 0.25$	0.386	—
E	10.25	$\pm 0.25$	0.404	—
H	5.00	$\pm 0.2$	0.197	—

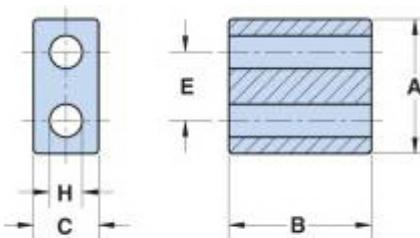


Figure 3

**Chart Legend**

+ Test frequency

Electrical Properties	
A <sub>L</sub> (nH)	96 Min

Multi-aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and A<sub>L</sub> value. The high frequency 67 material is controlled for A<sub>L</sub> value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

#### [Catalog Drawing](#)

Multi-aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi-aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi-hole beads are tested for A<sub>L</sub> value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [ferrites@fair-rite.com](mailto:ferrites@fair-rite.com) • [www.fair-rite.com](http://www.fair-rite.com)