

**AANI-NI-0014**[Request Samples](#)[Check Inventory](#)

5.50 x 3.90 x 0.49 mm
RoHS/RoHS II Compliant
MSL Level = 1

Features


- Low cost
- Low profile antenna integrated along PCB edge
- Robust performance even when employed in solutions requiring “potting/coating/over-mold”
- Based on Technology Patented by Abracon
- Highly efficient
- Wide Coverage: 6.24 – 8.74 GHz
- Low Return Loss: < -7.4 dB

Applications

- Applications utilizing UWB Channels 5, 6, 8, 9, and 10 (6.24 - 8.74 GHz)
- Wireless Remote Control
- Real-Time Location
- Digital Keys
- Hands-Free Payment
- Indoor Navigation
- Object Detection

Product Image

The Stamped Metal Niche antenna is implemented on an evaluation board in the image below.

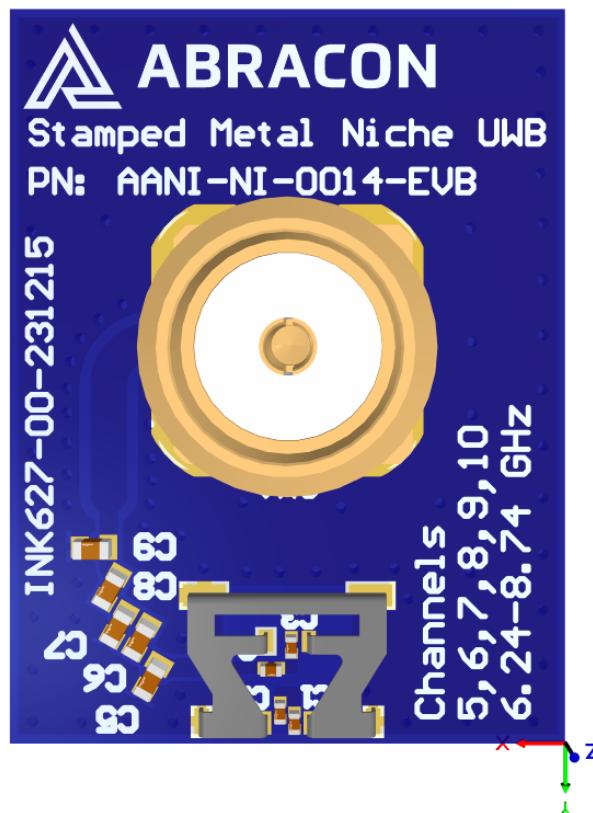



AANI-NI-0014

Request Samples



Check Inventory



5.50 x 3.90 x 0.49 mm
 RoHS/RoHS II Compliant
 MSL Level = 1

Electrical Specification

Parameter	Specification					Unit
UWB Channel	5	6	8	9	10	-
Operating Frequency	6240 - 6739	6739 - 7238	7238 - 7738	7738 - 8237	8237 - 8736	MHz
Return Loss	< -8.9	< -7.5	< -7.4	< -7.7	< -9.1	dB
Polarization	Linear					-
Peak Gain	2.8	3.4	2.2	2.5	2.8*	dBi
Efficiency	> -1.9 (65)	> -2.0 (63)	> -2.1 (62)	> -2.6 (55)	> -2.3 (59)*	dB (%)
Impedance	50					Ω

Note: All measurements were conducted on the evaluation board in free space. Performance will vary depending on the ground plane, application, and environment.


*Channel 10 radiation measurements (efficiency/gain) are limited up to 8500 MHz.

Mechanical Specification

Parameter	Specification
Antenna Dimension	5.50 x 3.90 x 0.49 mm
Evaluation board Dimension	15 x 20 mm
Mounting Type	Surface Mount

Product Dimensions


The Stamped Metal Niche antenna is 5.50 x 3.90 x 0.49 mm in size, see dimensions in millimeters below. Drawing is shown by first angle projection.

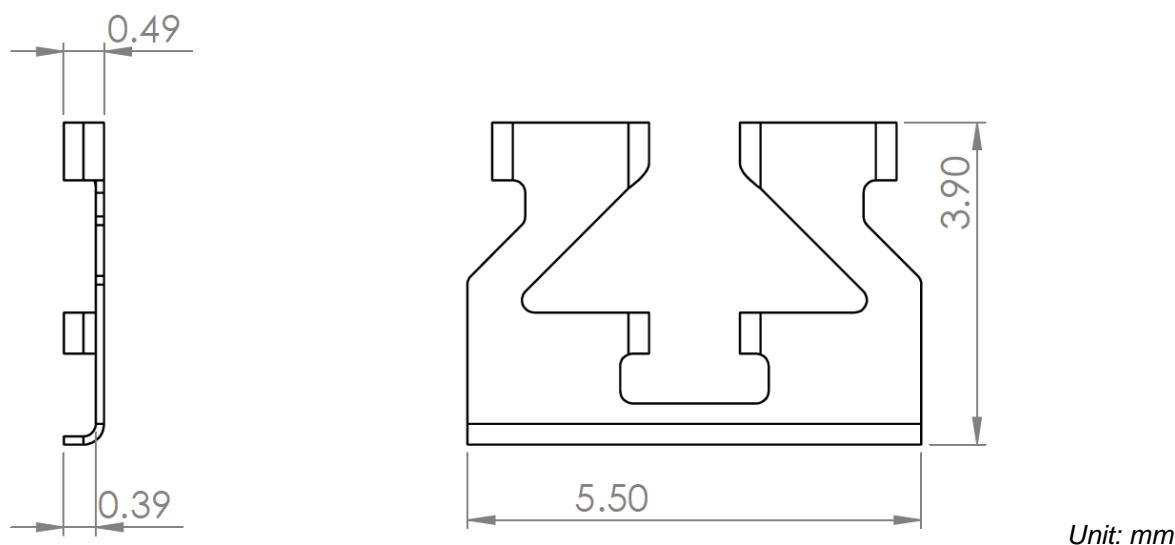

**AANI-NI-0014**[Request Samples](#)[Check Inventory](#)**5.50 x 3.90 x 0.49 mm****RoHS/RoHS II Compliant****MSL Level = 1**

Antenna Footprint

The dimensions of the copper cutout and solder pad positions are shown in the image below. The antenna and the footprint are symmetrical. This means that the antenna feed can originate from either side.

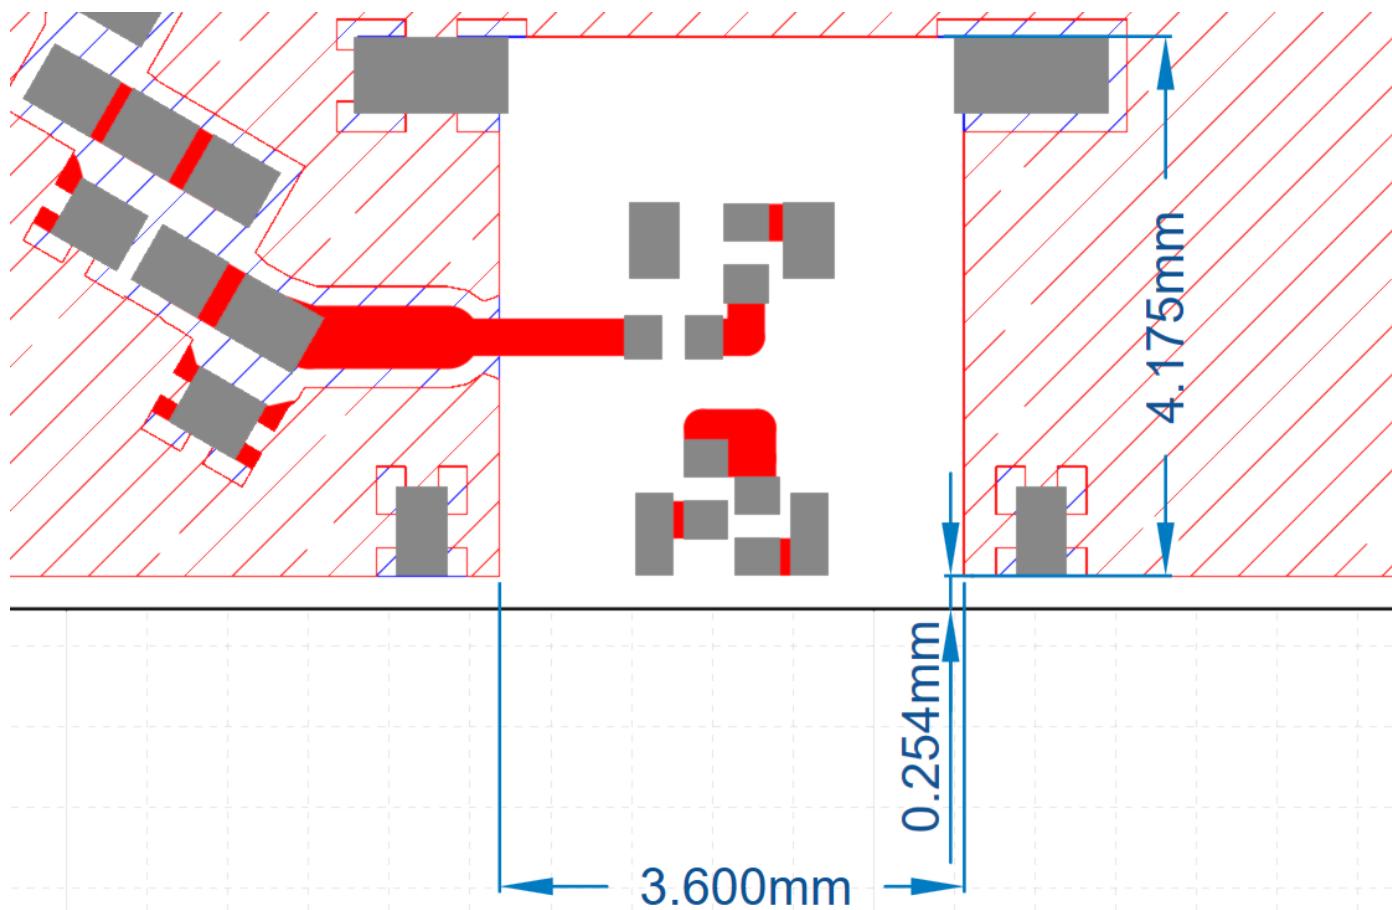


For a detailed antenna footprint, visit Abracan's website.


**AANI-NI-0014**[Request Samples](#)[Check Inventory](#)**5.50 x 3.90 x 0.49 mm****RoHS/RoHS II Compliant****MSL Level = 1**

Measurement Setup

The antenna measurements were all done in free space, with the Stamped Metal Niche antenna implemented on its evaluation board that has a PCB size of 15 by 20 (X by Y) mm.

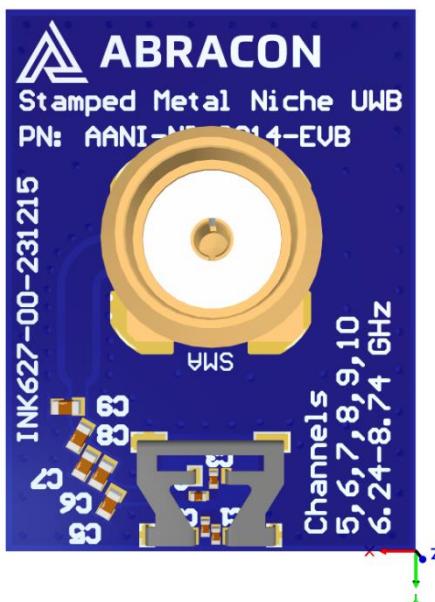


Reflection Characteristics – Return Loss

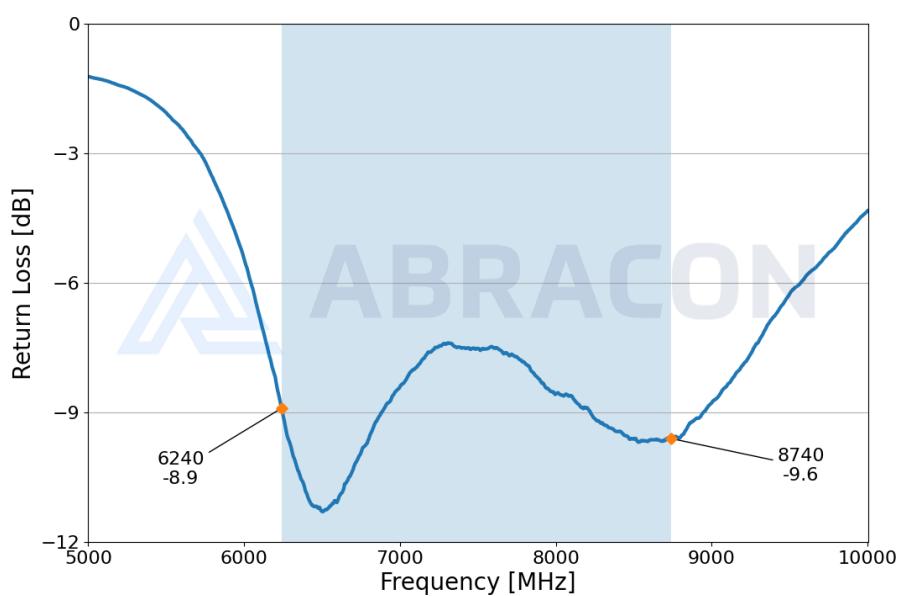


**AANI-NI-0014**[Request Samples](#)[Check Inventory](#)

5.50 x 3.90 x 0.49 mm
RoHS/RoHS II Compliant
MSL Level = 1

Radiation Characteristics – Total Efficiency

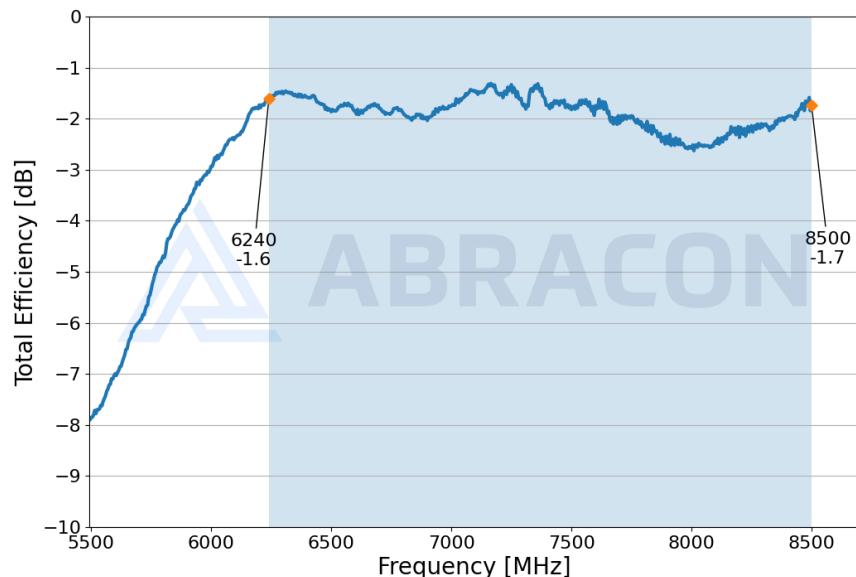

Radiation Characteristics – Maximum Gain

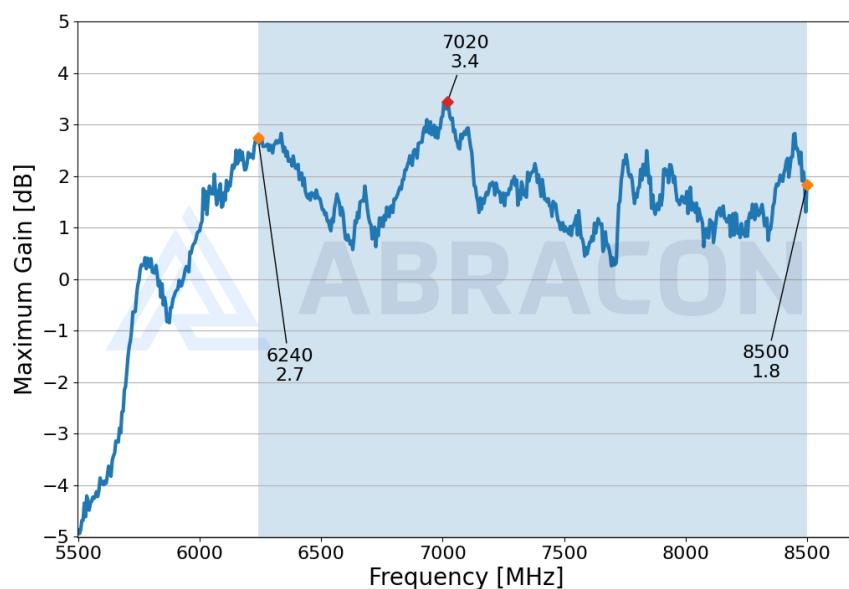



AANI-NI-0014



Request Samples [\(>\)](#)

Check Inventory [\(>\)](#)



5.50 x 3.90 x 0.49 mm
RoHS/RoHS II Compliant
MSL Level = 1

Radiation Characteristics – 2D Pattern @ 6250 MHz



XY-plane:

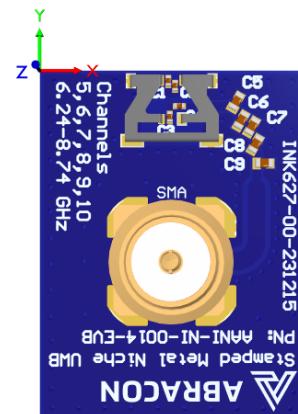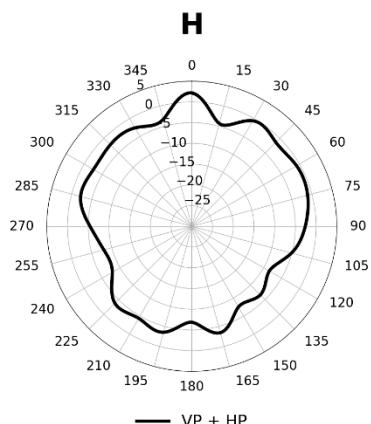

YZ-plane:

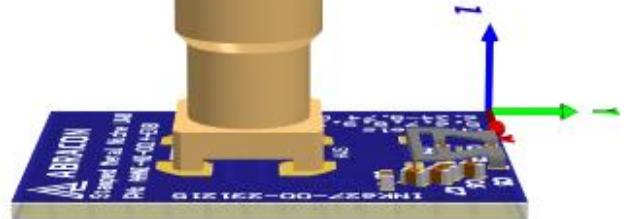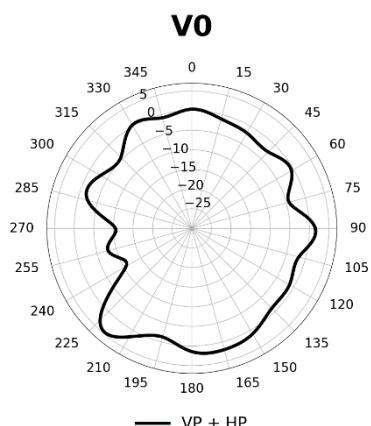

XZ-plane:

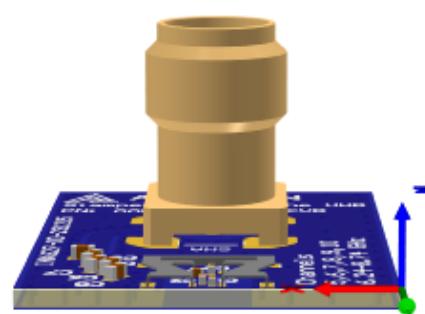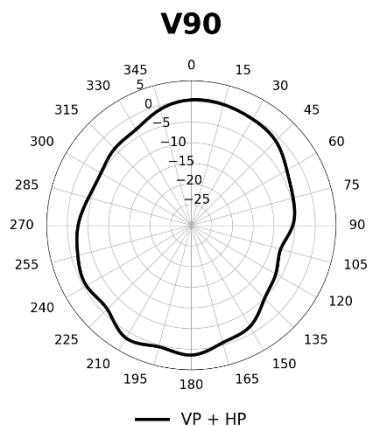

VP: Vertical Polarization
HP: Horizontal Polarization

Unit: dBi



AANI-NI-0014

Request Samples



Check Inventory





5.50 x 3.90 x 0.49 mm

RoHS/RoHS II Compliant



MSL Level = 1

Radiation Characteristics – 2D Pattern @ 6750 MHz



XY-plane:

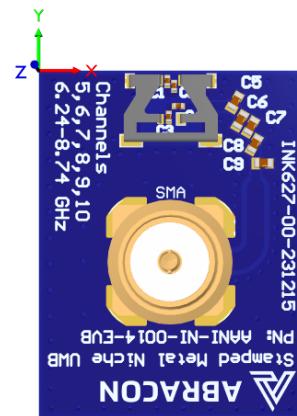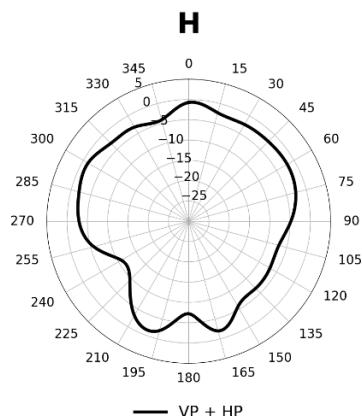

YZ-plane:

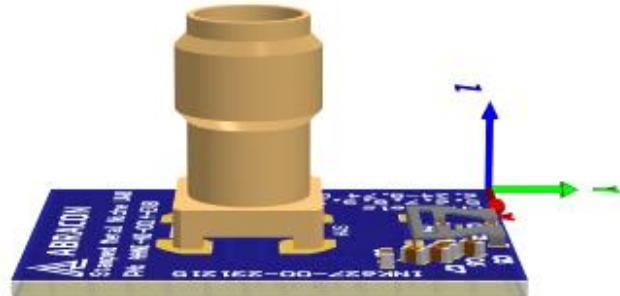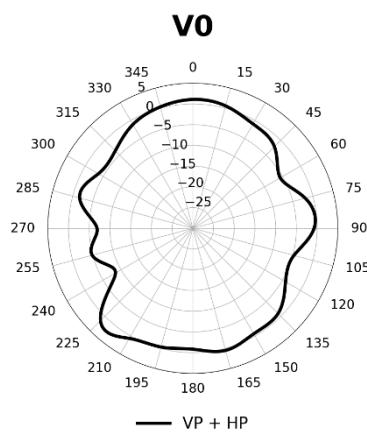

XZ-plane:

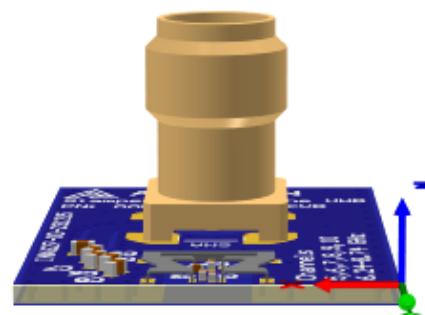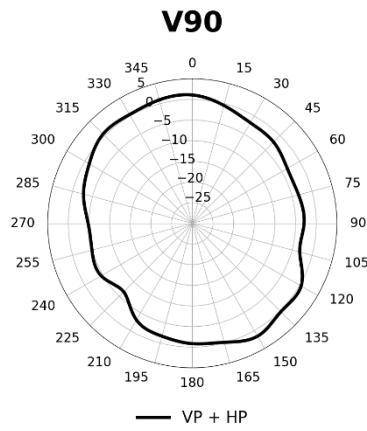

VP: Vertical Polarization

HP: Horizontal Polarization

Unit: dBi



AANI-NI-0014



Request Samples [\(>\)](#)

Check Inventory [\(>\)](#)



5.50 x 3.90 x 0.49 mm
RoHS/RoHS II Compliant
MSL Level = 1

Radiation Characteristics – 2D Pattern @ 8250 MHz



XY-plane:

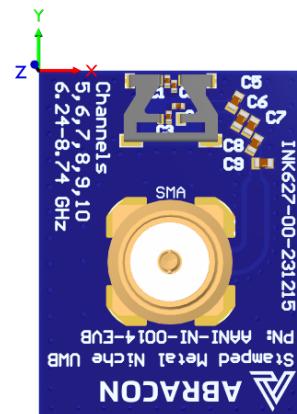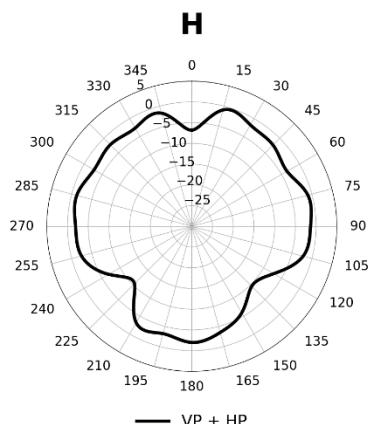

YZ-plane:

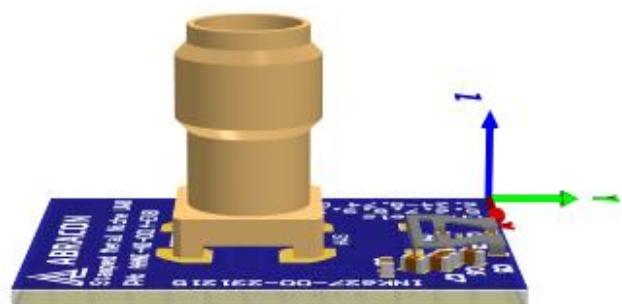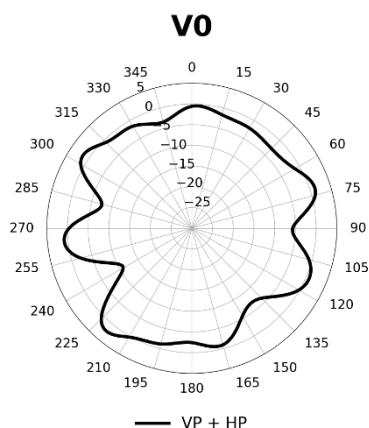

XZ-plane:





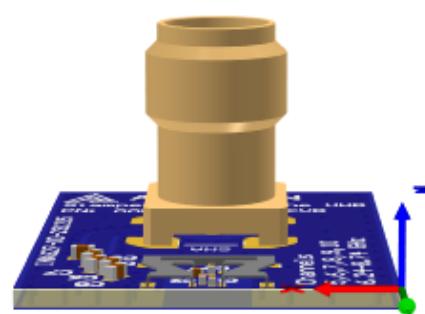
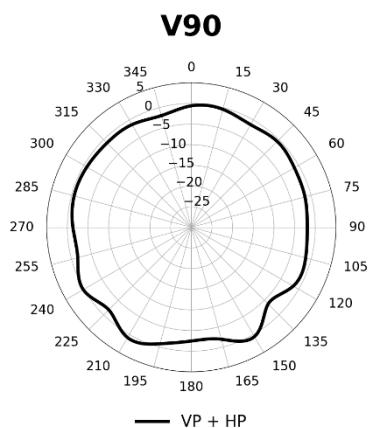


VP: Vertical Polarization
HP: Horizontal Polarization

Unit: dBi

**AANI-NI-0014**[Request Samples](#)[Check Inventory](#)**5.50 x 3.90 x 0.49 mm****RoHS/RoHS II Compliant****MSL Level = 1**

Radiation Characteristics – 3D Pattern

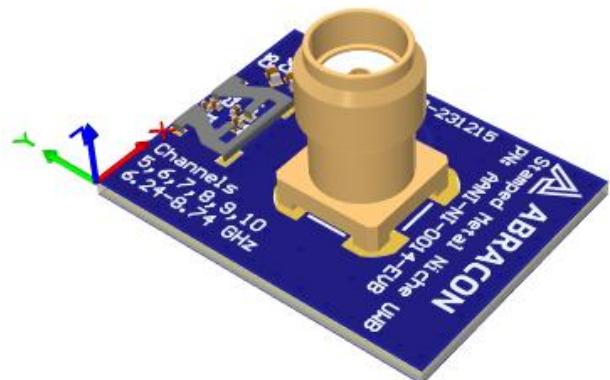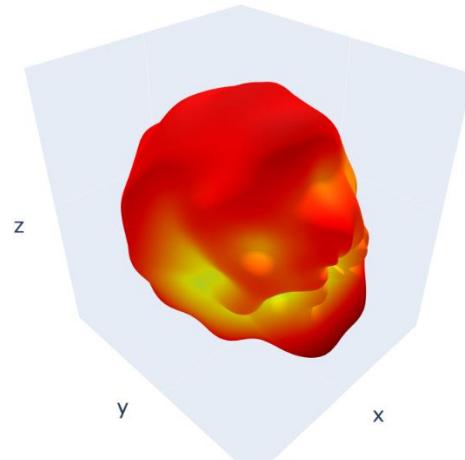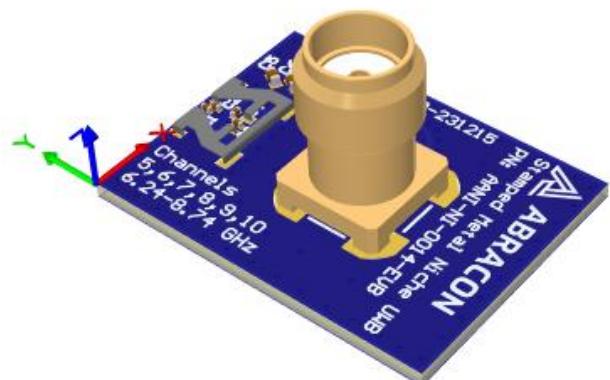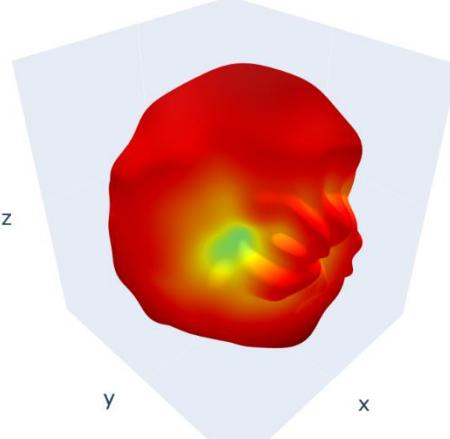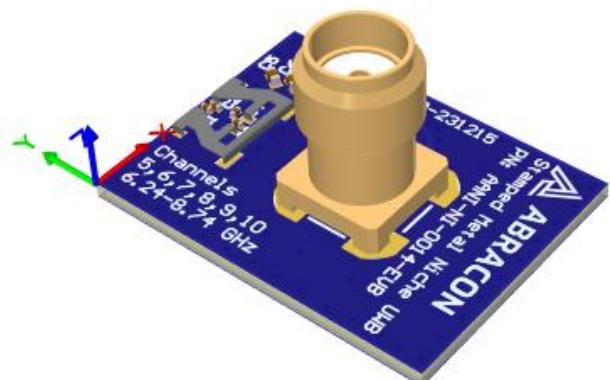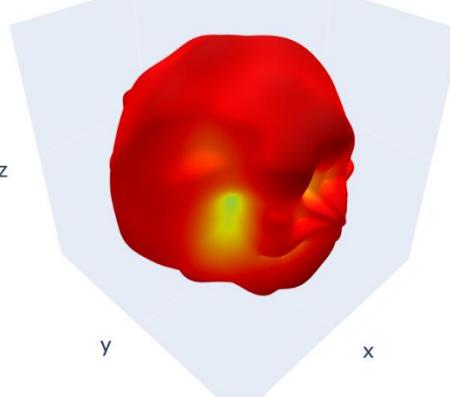
6250 MHz**6750 MHz****8250 MHz**

**AANI-NI-0014**[Request Samples](#)[Check Inventory](#)


5.50 x 3.90 x 0.49 mm
RoHS/RoHS II Compliant
MSL Level = 1

Evaluation Board Outline & Matching Circuit

The evaluation board is developed to showcase the performance of the Stamped Metal Niche antenna on a typical PCB and to simplify antenna testing and evaluation. It has a size of 15 x 20 mm and includes an SMA connector. The performance will vary with different PCB sizes. Abracon can offer support to optimize the antenna for specific applications.

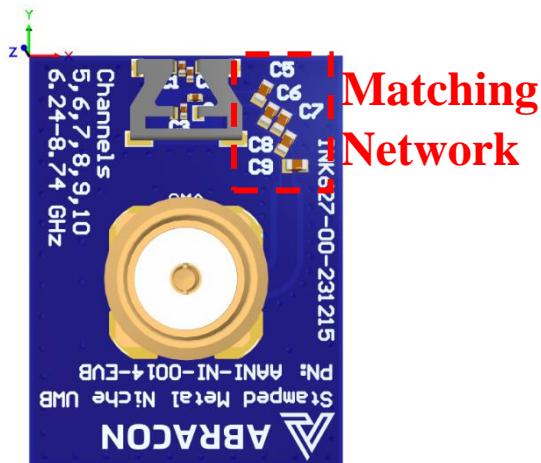

The evaluation board has a matching circuit implemented next to the antenna to enable optimization possibilities for the user. The C1-C4 component footprints are sized for 0201 (0503 metric) SMD components. The C5-C9 component footprints are sized for 0402 (1005 metric) SMD components.

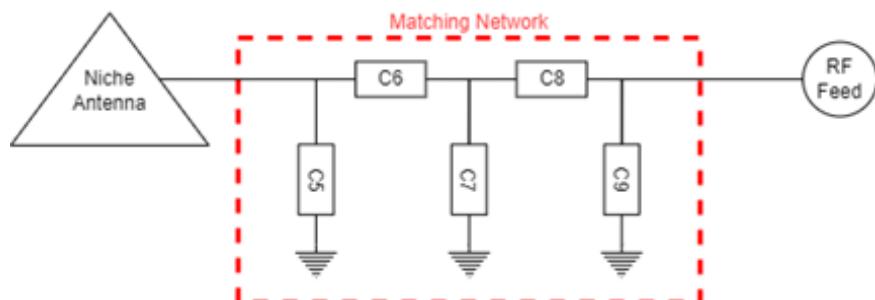

The standard tuning for the evaluation board is the following (can be replaced by equivalent):

- C1, C2 = 0.1 pF (GRM0335C1HR10WA01)
- C3, C4 = 0.4 pF (GJM0335C1HR40WB01)
- C5, C7, C9 = Not Mounted
- C6, C8 = Zero Ohm (KOA Speer RK73Z1ETTP)

However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in the General Implementation Guidelines section below.


**AANI-NI-0014**[Request Samples](#)[Check Inventory](#)

5.50 x 3.90 x 0.49 mm
RoHS/RoHS II Compliant
MSL Level = 1


General Implementation Guidelines for the Stamped Metal Niche Antenna

The antenna can be positioned in different ways, although there are some positions which are more beneficial. The left picture shows a typical PCB with examples on different antenna positions. The optimal positions are options 1 or 3. Options 2 is also possible. The antenna must be placed along the PCB edge, i.e., it cannot be placed in the middle. Option 2 may be the best option for some PCBs depending on dimensions.

Antenna Positions:

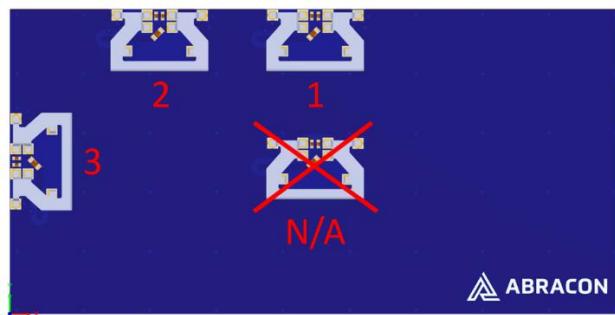

Antenna cutout & via-structure:

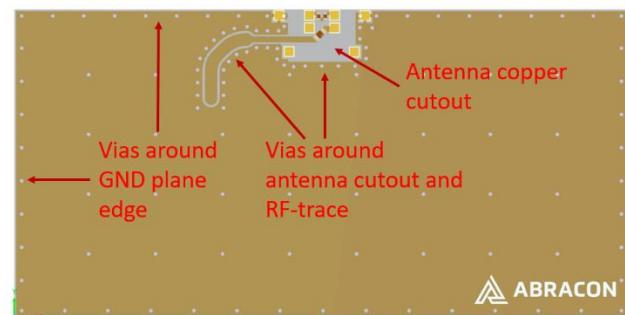

The rectangular copper cutout in the footprint needs to go through all the layers in the PCB stackup, meaning that there cannot be copper on any layer in this area. It is also recommended to have a good via-structure around the cutout and the edge of the ground plane, see the right image above.

It shall also be highlighted that plastic and metal parts in the near proximity of antennas may influence the antenna tuning and/or performance. This aspect should be noted as a general guideline for all antennas. The effects are difficult to estimate without detailed information, but it is common that a plastic housing above the antenna shifts the resonant frequency down. It is recommended to measure the antenna in the actual device after implementation and to implement a matching network on the antenna feed to adjust for the potential frequency shift.

The Stamped Metal Niche antenna shows great performance when potted compared to other antenna solutions and has also shown good performance in proximity of metal and other harsh antenna environments.

Packaging Information

Qty per reel: 7200pcs

Reel size: 13'

Carton box size: 35 x 35 x 40cm

No. of reel per box: 13 reels

Weight per box: about 7.0kg

Qty per box: 93600pcs

ATTENTION: Abracon LLC's products are Commercial-Off-The-Shelf ('COTS'), which are designed, intended, and validated for use in commercial, industrial, and automotive applications. The customer is responsible for testing and verifying the performance of an Abracon solution to meet their system-level requirements.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11-21-23

ABRACON IS
ISO9001-2015
CERTIFIED