

SERIES: DQD20 | DESCRIPTION: DC-DC CONVERTER

FEATURES

- up to 20 W isolated output
- single and dual regulated outputs
- over voltage, input under voltage, short circuit, and over current protections
- remote on/off control
- 1,500 Vdc isolation
- -40 ~ 85°C temperature range, with derating
- certified to IEC/EN 62368-1
- PCB, chassis and DIN-rail mount options




MODEL

MODEL	input voltage		output voltage typ (Vdc)	output current max (mA)	output power max (W)	ripple & noise ¹ max (mVp-p)	efficiency ² typ (%)
	typ (Vdc)	range (Vdc)					
DQD20-24-S3	24	9~36	3.3	5,000	16.5	100	88
DQD20-24-S5	24	9~36	5	4,000	20	100	90
DQD20-24-S9	24	9~36	9	2,222	20	100	90
DQD20-24-S12	24	9~36	12	1,667	20	100	90
DQD20-24-S15	24	9~36	15	1,333	20	100	90
DQD20-24-S24	24	9~36	24	1,111	20	100	89
DQD20-24-S28	24	9~36	28	714	20	100	91
DQD20-24-D5	24	9~36	±5	±2,000	20	200	87
DQD20-24-D9	24	9~36	±9	±1,111	20	200	87
DQD20-24-D12	24	9~36	±12	±833	20	200	90
DQD20-24-D15	24	9~36	±15	±667	20	200	90
DQD20-24-D24	24	9~36	±24	±416	20	200	88
DQD20-48-S3	48	18~75	3.3	5,000	16.5	100	88
DQD20-48-S5	48	18~75	5	4,000	20	100	90
DQD20-48-S9	48	18~75	9	2,222	20	100	90
DQD20-48-S12	48	18~75	12	1,667	20	100	91
DQD20-48-S15	48	18~75	15	1,333	20	100	91
DQD20-48-S24	48	18~75	24	833	20	100	91
DQD20-48-D5	48	18~75	±5	±2,000	20	200	86
DQD20-48-D9	48	18~75	±9	±1,111	20	200	87
DQD20-48-D12	48	18~75	±12	±833	20	200	89
DQD20-48-D15	48	18~75	±15	±667	20	200	89
DQD20-48-D24	48	18~75	±24	±416	20	200	90

Notes: 1. The ripple and noise is measured at 10%~100% load and 20MHz bandwidth. 0% ~10% load ripple & noise is less than or equal to 5%Vo; the ripple & noise test adopts the parallel line test method, see the ripple & noise test instructions for details.
2. The efficiency is tested at full load.
3. Unless otherwise specified, all values or indicators in this manual are tested at Ta=25°C, humidity<75%RH, rated input voltage and rated load (pure resistance load).

PART NUMBER KEY

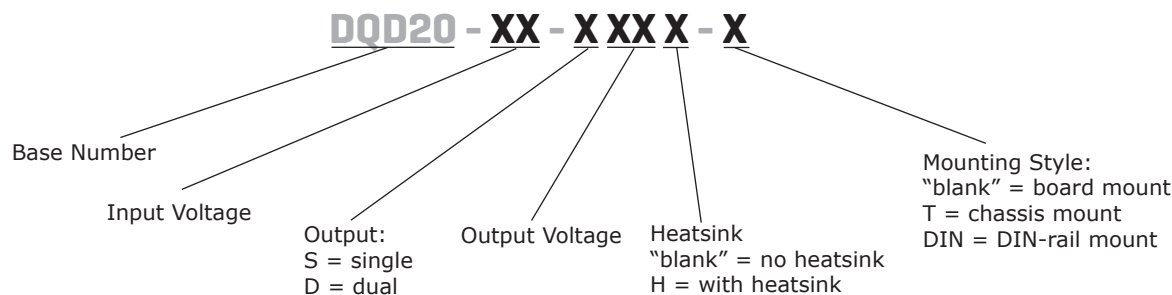

INPUT

parameter	conditions/description		min	typ	max	units
input voltage range	24 Vdc input models		9	24	36	Vdc
	48 Vdc input models		18	48	75	Vdc
input current (full load/no load)	24 Vdc input; 3.3 Vdc output model			781/33		mA
	24 Vdc input; 5, 9 Vdc output model			926/33		mA
	24 Vdc input; 12, 15 Vdc output models			926/5		mA
	24 Vdc input; 24, 28 Vdc output models			915/5		mA
	48 Vdc input; 3.3 Vdc output models			390/17		mA
	48 Vdc input; 5, 9 Vdc output models			463/17		mA
	48 Vdc input; 12, 15, 24 Vdc output models			457/5		mA
	24 Vdc input; ± 5 Vdc output model			957/33		mA
	24 Vdc input; ± 9 Vdc output model			946/6		mA
	24 Vdc input; $\pm 12, \pm 15$ Vdc output model			926/5		mA
	24 Vdc input; ± 24 Vdc output model			947/5		mA
	48 Vdc input; ± 5 Vdc output model			484/17		mA
	48 Vdc input; ± 9 Vdc output model			472/5		mA
	48 Vdc input; $\pm 12, \pm 15$ Vdc output model			468/5		mA
	48 Vdc input; ± 24 Vdc output model			463/5		mA
surge voltage	1 second max					
	24 Vdc input models		-0.7		50	Vdc
	48 Vdc input models		-0.7		100	Vdc
turn-off voltage threshold	at full load					
	24 Vdc input models		5	7	9	Vdc
	48 Vdc input models		11	13	18	Vdc
filter	Pi filter					
no load power consumption	0.1					W
remote on/off ⁴	module on	single outputs	CTRL pin suspended or pulled high (2.5~12 Vdc)			
		dual outputs	CTRL pin suspended or pulled high (3.3~12 Vdc)			
	module off	CTRL pin connected to -Vin or pulled low (0~1.2 Vdc)				
input current when off	3					mA

Notes: 4. The voltage of CTRL pin is relative to -Vin pin.

OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitive load	3.3 Vdc output models			10,000	μ F
	5, ± 5 Vdc output models			5,000	μ F
	9 Vdc output models			3,000	μ F
	± 9 Vdc output models			2,000	μ F
	12, ± 12 Vdc output models			1,000	μ F
	15, ± 15 Vdc output models			800	μ F
	18 Vdc output models			600	μ F
	24, ± 24 , 28 Vdc output models			500	μ F

OUTPUT

parameter	conditions/description	min	typ	max	units
voltage accuracy	single outputs		±1	±2	%
	dual outputs	Vo1 Vo2	±1	±2	%
			±.5	±3	%
voltage regulation	full voltage range, nominal load		±0.2	±0.5	%
load regulation	5% ~ 100% load		±0.5	±1	%
transient response recovery	25% rated load step change				
	single outputs		250	500	µs
	dual outputs		300	500	µs
transient response deviation	25% rated load step change		±5	±8	%
	3.3, 5, ±5 Vdc output models		±3	±5	%
	all other models				
start-up time	at rated input voltage and constant resistance load		10		ms
switching frequency	PWM mode		280		kHz
adjustability	single outputs	via trim	90	110	%
	dual outputs	unavailable			

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over current protection		110		220	%
over voltage protection	single outputs	110		200	%
	dual outputs	120		200	%
short circuit protection	continuous, auto recovery, hiccup				
output overshoot				10	%

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute, 0.5 mA max	1,500			Vdc
	input/output to case for 1 minute, 0.5 mA max	1,000			Vdc
isolation capacitance	input to output, (100 kHz, 0.1V)		1,000		pF
safety approvals ⁵	certified to 62368-1: IEC, EN				
conducted emissions	CISPR32/EN55032 Class B (see recommended circuit)				
radiated emissions	CISPR32/EN55032 Class B (see recommended circuit)				
ESD	IEC/EN61000-4-2 Contact ±6 kV, Air ±8 kV, Perf. Criteria B				
radiated immunity	IEC/EN61000-4-3 10 V/m, Perf. Criteria A (see recommended circuit)				
conducted immunity	IEC/EN61000-4-6 3 Vrms, Perf. Criteria A (see recommended circuit)				
MTBF	as per MIL-HDBK-217F at 25 °C	1,000,000			hours
RoHS	yes				

Notes: 5. Output is only considered as ES1 if the input source meets reinforced insulation requirements from primary AC source or any hazardous voltage source.
Unit maintains only functional insulation from input to output

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		85	°C
max case temperature				105	°C
storage temperature		-55		125	°C
operating humidity	non condensing	5		95	%


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	board mount: 25.4 x 25.4 x 12.5 [1.000 x 1.000 x 0.492 inches]				mm
	board mount with heatsink: 25.4 x 25.4 x 18.0 [1.000 x 1.000 x 0.708 inches]				mm
	chassis mount: 76.0 x 31.5 x 21.3 [2.990 x 1.240 x 0.838 inches]				mm
	chassis mount with heatsink 76.0 x 31.5 x 26.0 [2.990 x 1.240 x 1.023 inches]				mm
	DIN-rail mount: 76.0 x 31.5 x 26.0 [2.990 x 1.240 x 1.023 inches]				mm
	DIN-rail mount with heatsink: 76.0 x 31.5 x 30.8 [2.990 x 1.240 x 1.212 inches]				mm
case material	aluminum				
weight	single output models	board mount	15		g
		board mount with heatsink	19		g
		chassis mount	37		g
		chassis mount with heatsink	40		g
		DIN-rail mount	57		g
		DIN-rail mount with heatsink	60		g
	dual output models	board mount	18		g
		board mount with heatsink	21		g
		chassis mount	39		g
		chassis mount with heatsink	42		g
		DIN-rail mount	59		g
		DIN-rail mount with heatsink	62		g
cooling	natural convection				

MECHANICAL DRAWING

Board Mount

units: mm [inch]
pin diameter tolerance: ±0.10 [±0.004]
general tolerance: ±0.50 [±0.020]

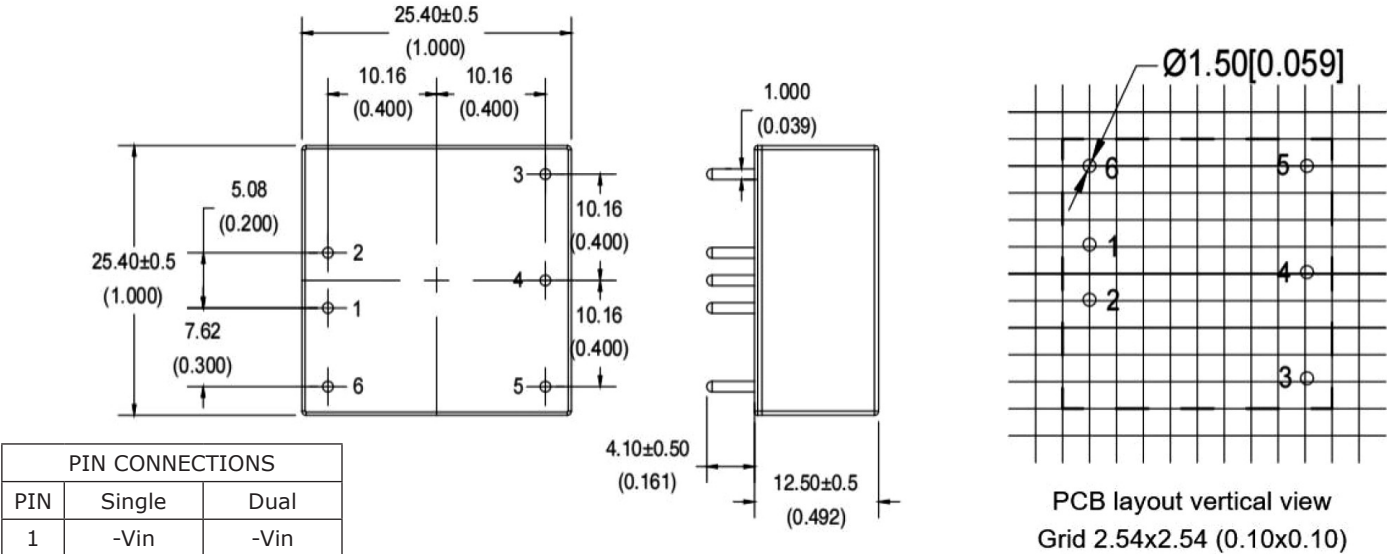


MECHANICAL DRAWING (CONTINUED)

Board Mount with Heatsink


units: mm [inch]

pin diameter tolerance: ± 0.10 [± 0.004]

general tolerance: ± 0.50 [± 0.020]

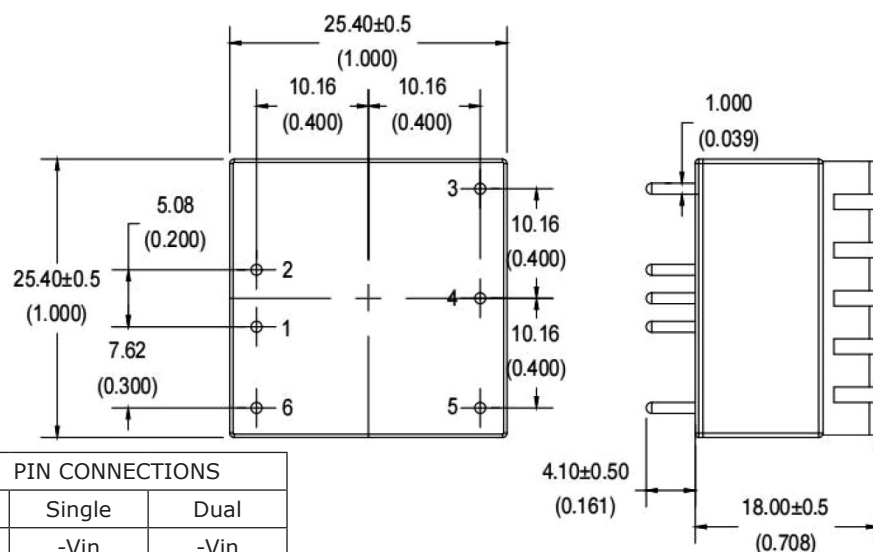

PIN CONNECTIONS		
PIN	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	+Vout	+Vout
4	Trim	COM
5	GND	-Vout
6	Ctrl	Ctrl

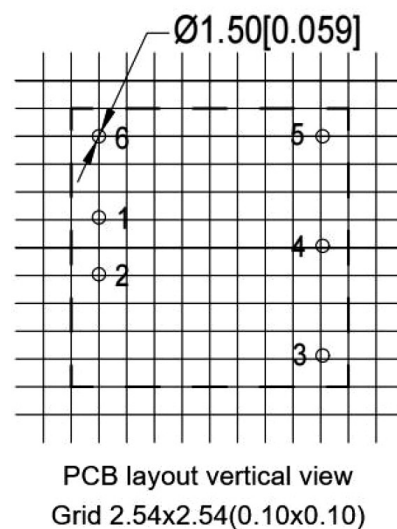

Chassis Mount


units: mm [inch]

pin diameter tolerance: ± 0.10 [± 0.004]

general tolerance: ± 0.50 [± 0.02]

wire range: 24~12 AWG

tightening torque: max 0.4 N·m

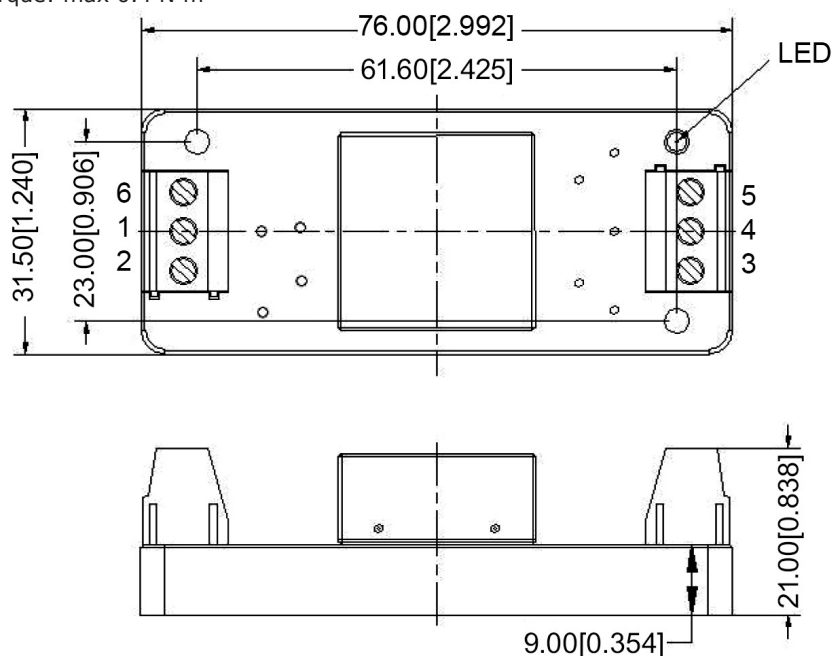


PIN CONNECTIONS		
PIN	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	+Vout	+Vout
4	Trim	COM
5	GND	-Vout
6	Ctrl	Ctrl

MECHANICAL DRAWING (CONTINUED)

Chassis Mount with Heatsink


units: mm [inch]
pin diameter tolerance: ±0.10 [±0.004]
general tolerance: ±0.50 [±0.02]
wire range: 24~12 AWG
tightening torque: max 0.4 N·m

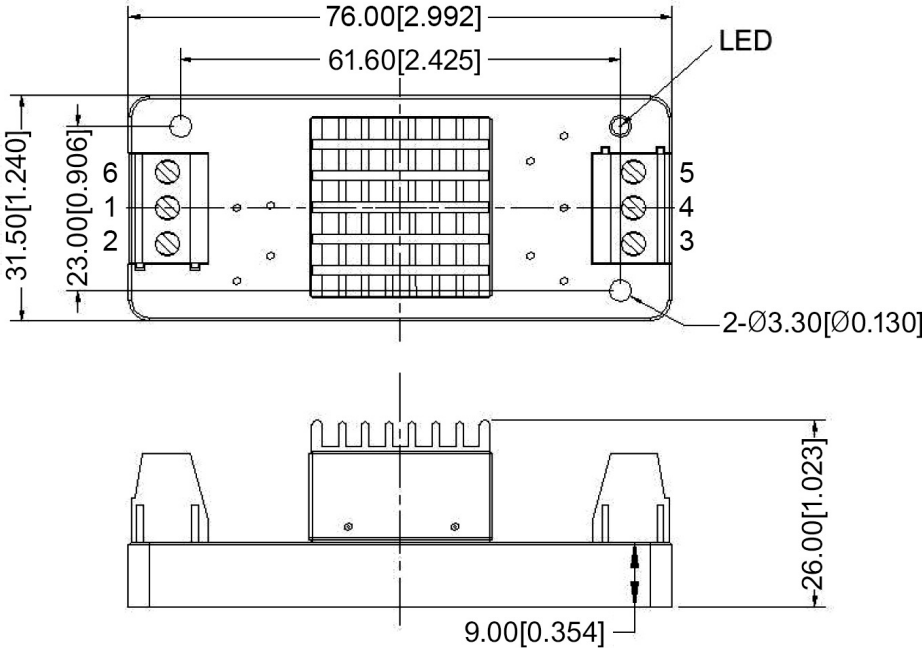

PIN CONNECTIONS		
PIN	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	+Vout	+Vout
4	Trim	COM
5	GND	-Vout
6	Ctrl	Ctrl

DIN-rail Mount

units: mm [inch]
pin diameter tolerance: ±0.10 [±0.004]
general tolerance: ±0.50 [±0.02]
wire range: 24~12 AWG
tightening torque: max 0.4 N·m

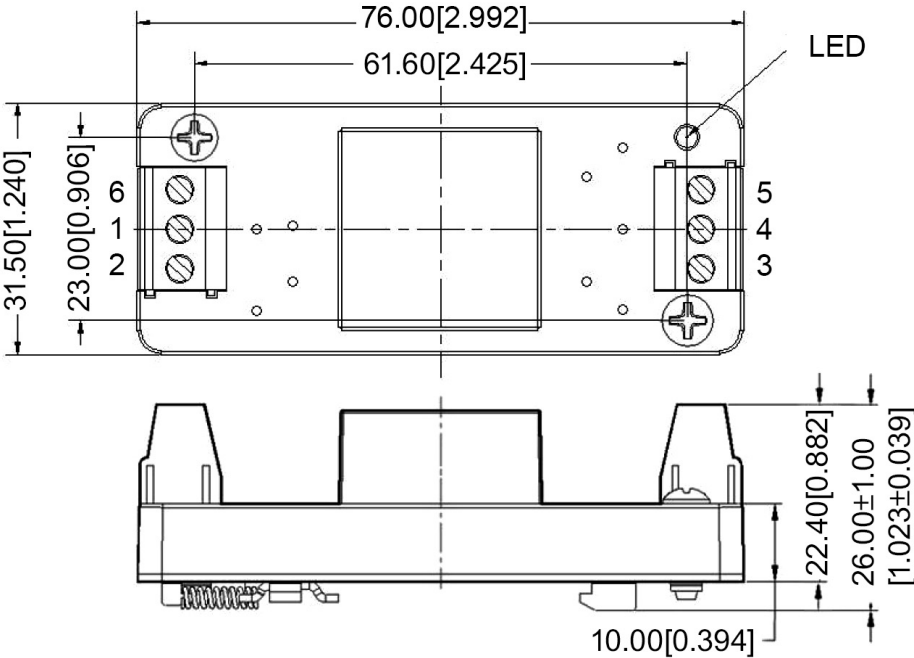


PIN CONNECTIONS		
PIN	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	+Vout	+Vout
4	Trim	COM
5	GND	-Vout
6	Ctrl	Ctrl

MECHANICAL DRAWING (CONTINUED)


DIN-rail Mount with Heatsink
units: mm [inch]
pin diameter tolerance: ± 0.10 [± 0.004]
general tolerance: ± 0.50 [± 0.02]
wire range: 24~12 AWG
tightening torque: max 0.4 N·m

PIN CONNECTIONS		
PIN	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	+Vout	+Vout
4	Trim	COM
5	GND	-Vout
6	Ctrl	Ctrl

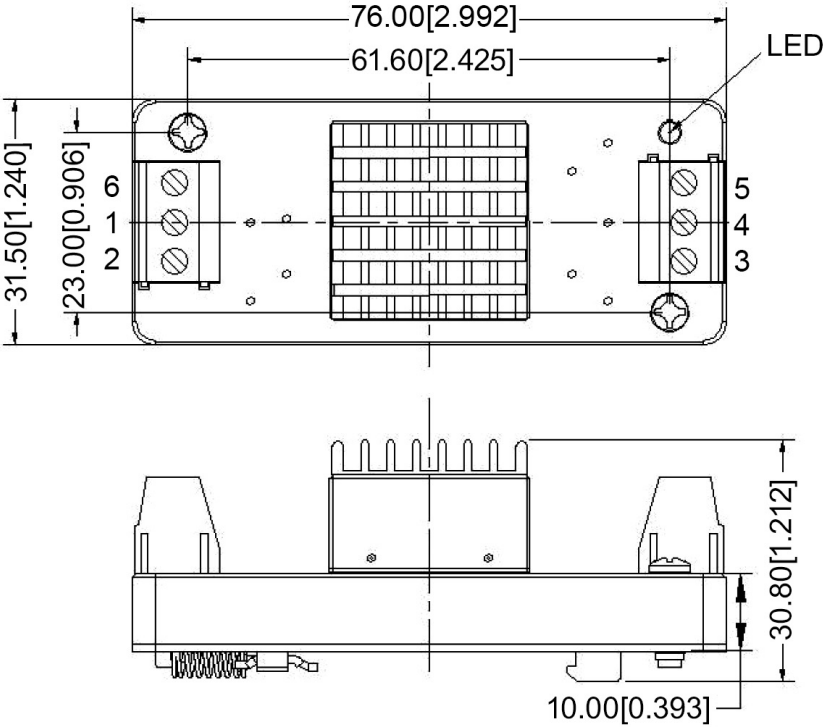

DERATING CURVES


TEMPERATURE DERATING CURVE
single output models without heatsink
(nominal input voltage)

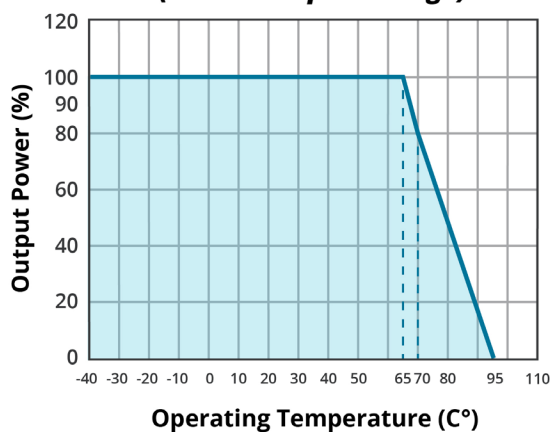

Key

3.3, 5 V output


TEMPERATURE DERATING CURVE
single output models without heatsink
(nominal input voltage)

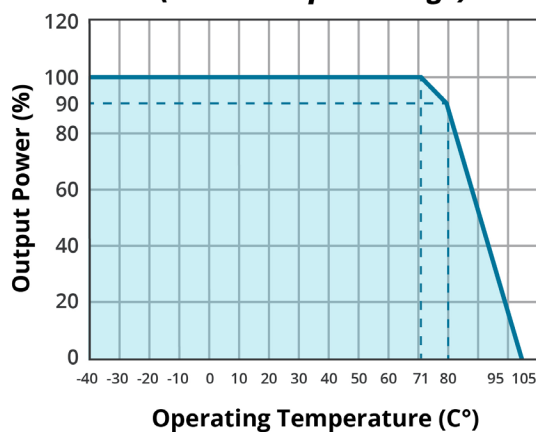

Key

>5 V output


TEMPERATURE DERATING CURVE
single output models with heatsink
(nominal input voltage)

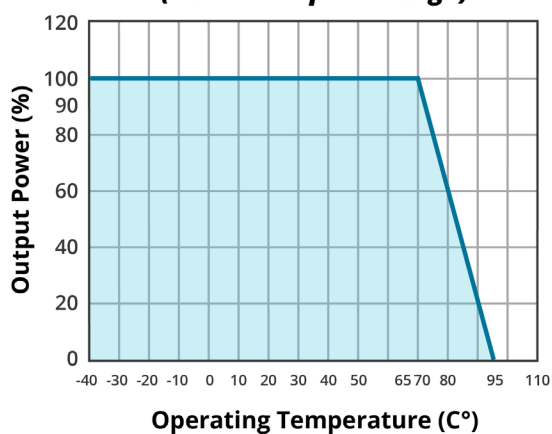

Key

3.3, 5 V output


TEMPERATURE DERATING CURVE
single output models without heatsink
(nominal input voltage)

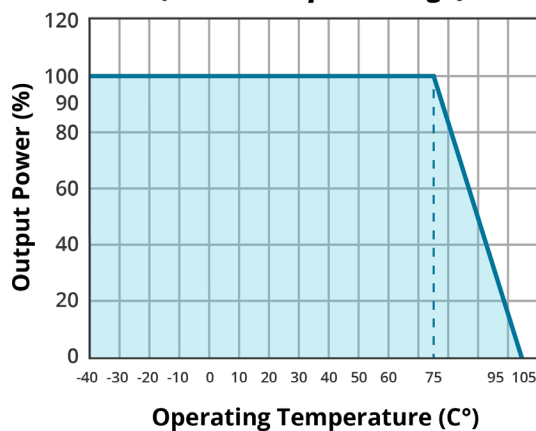

Key

>5 V output







TEMPERATURE DERATING CURVE
single output models without heatsink
(full input voltage)

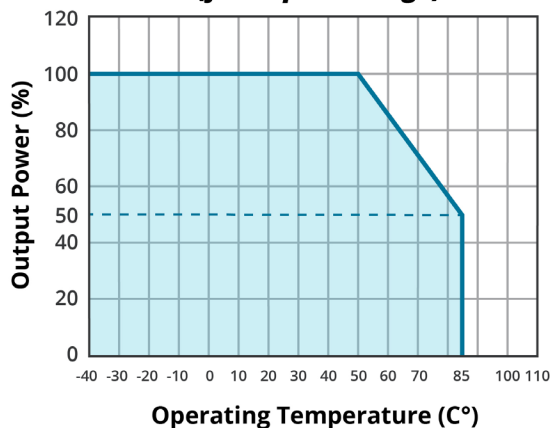

Key

single output
models

EFFICIENCY CURVES

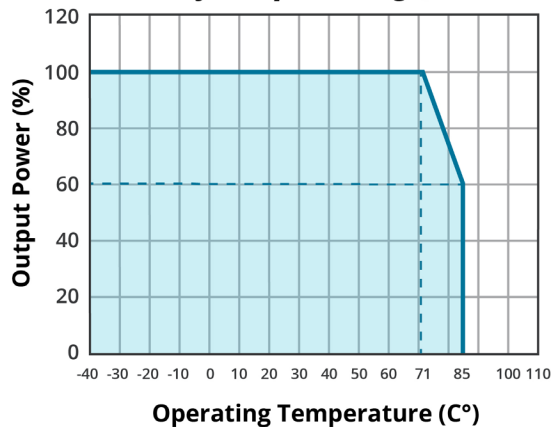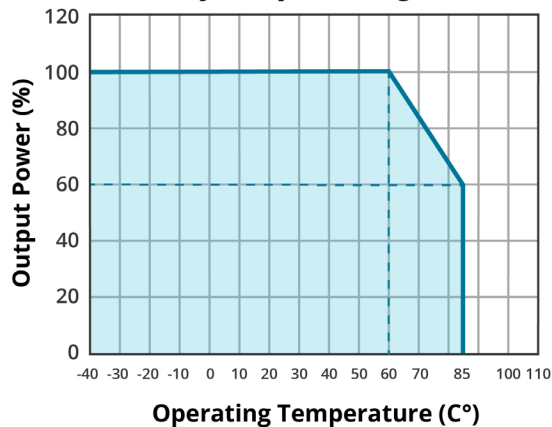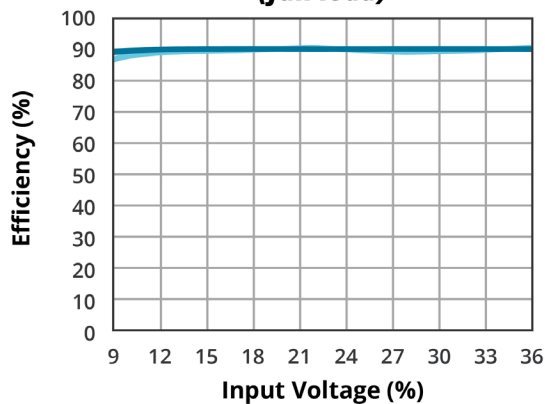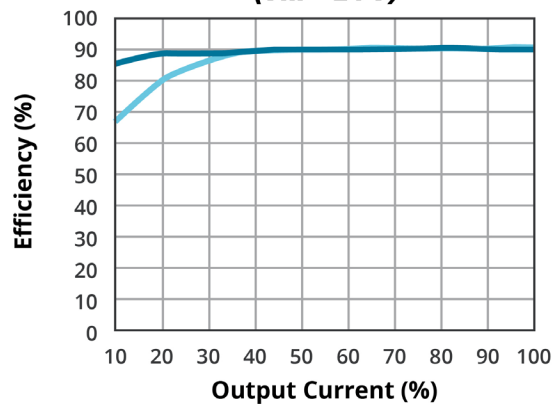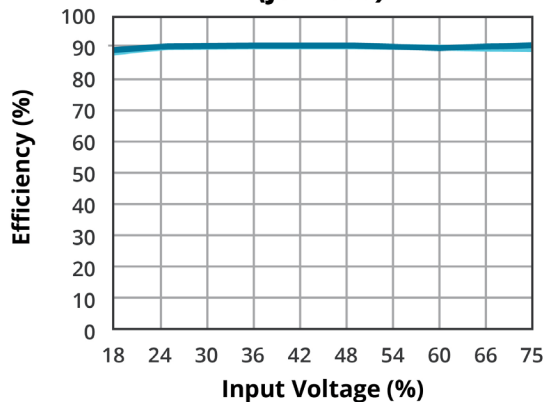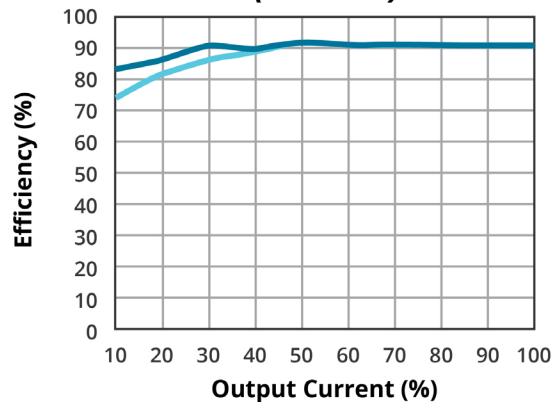TEMPERATURE DERATING CURVE
dual output models
(full input voltage)**TEMPERATURE DERATING CURVE**
dual output models
(full input voltage)**EFFICIENCY VS INPUT VOLTAGE**
(full load)**EFFICIENCY VS OUTPUT CURRENT**
(Vin = 24 V)**EFFICIENCY VS INPUT VOLTAGE**
(full load)**EFFICIENCY VS OUTPUT CURRENT**
(Vin = 48 V)

RIPPLE AND NOISE TEST INSTRUCTION

1. The ripple noise test requires the following setup:
- 12 twisted pair cables.

• An oscilloscope configured to Sample Mode with a bandwidth of 20 MHz.

• A 100 MHz bandwidth probe with the capacitor and ground removed.

• Capacitors C2 (0.1 μ F), a polypropylene capacitor, and C3 (10 μ F), a high-frequency, low-resistance electrolytic capacitor, connected in parallel to the probes and one side of the twisted pair.


• C0 and C1 refer to the application circuit as per the recommended specifications.
2. The ripple noise procedure:
- Connect the module input terminal (INPUT) to the input power supply.

Attach the power output terminal to the electronic load (LOAD) using the power line.

Sample the output from the power output port using a 30 $\pm$ 2 cm twisted pair cable.

Ensure the cable is connected exclusively to the oscilloscope probe, maintaining proper polarity alignment.
3. It is recommended to operate with a minimum 5% load or to connect an electrolytic capacitor with a high-frequency resistance of at least 470 μ F. Failure to do so may result in an increased output voltage ripple.
4. For dual-channel output products, it is advised to maintain a load imbalance within $\pm$ 5%.

Figure 1

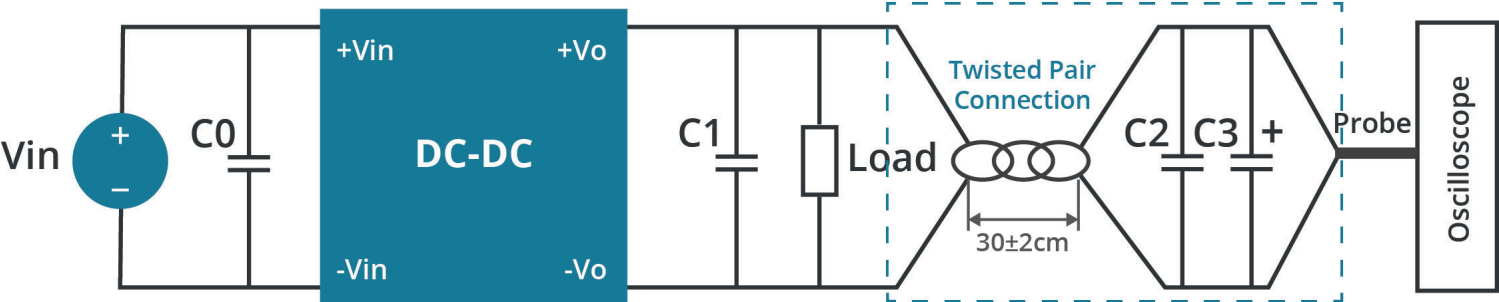

RIPPLE AND NOISE TEST CIRCUIT

Figure 2

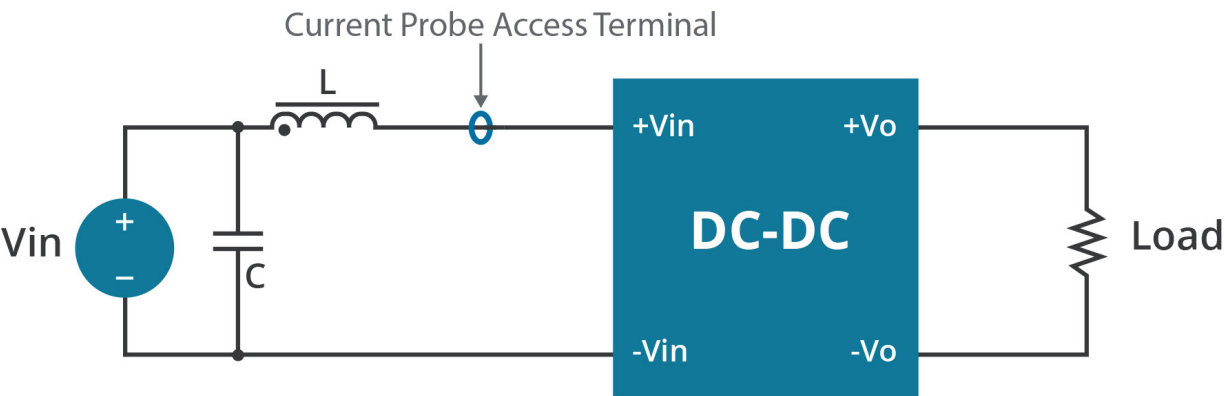


Table 1

COMPONENT	PARAMETER
C	220 μ F/ 100 V
L	4.7 μ H / 15 A

APPLICATION NOTES

Figure 3
Single output

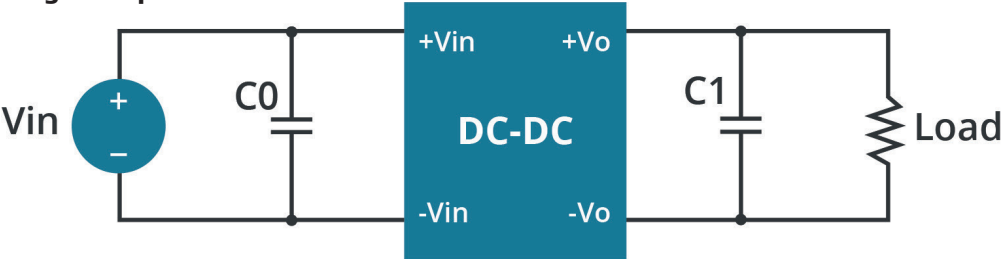


Table 2

COMPONENT	PARAMETER
C0	100 μ F / 100 V
C1	22 μ F / 100 V

Figure 4
Dual output

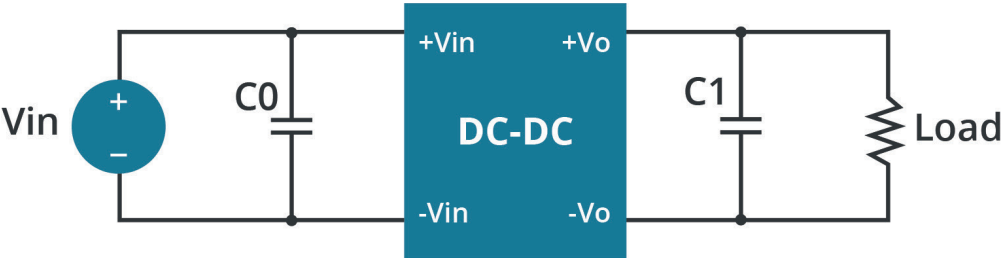


Table 3

COMPONENT	PARAMETER
C0	47-100 μ F / 100 V
C1	100 μ F / 100 V

EMC RECOMMENDED CIRCUIT

Figure 5
Single output

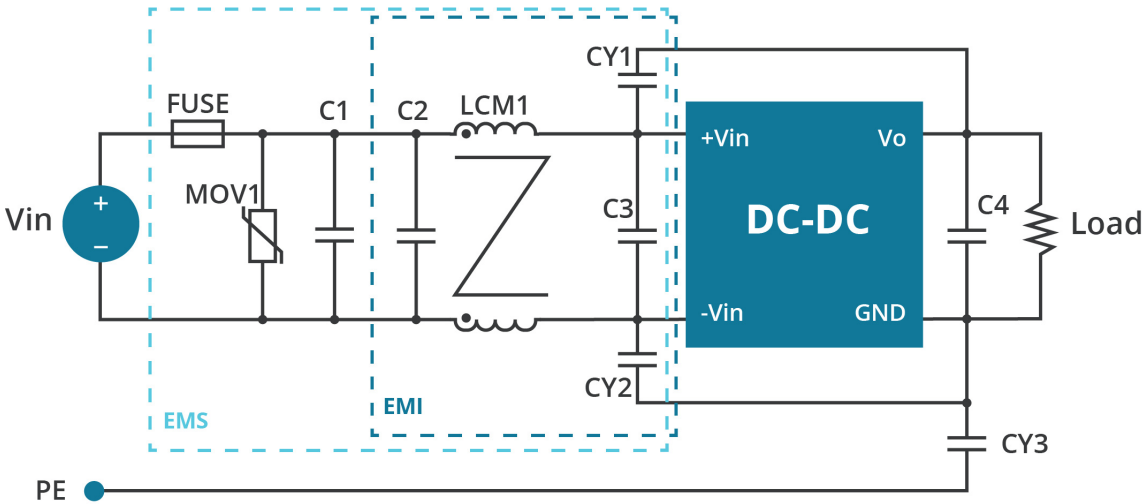


Table 4

COMPONENT	24 Vdc	48 Vdc
Fuse	TBD by customer	
MOV1	14D560K	14D101K
LCM1	5 mH	
C1, C2, C3	330 μ F/50 V	330 μ F/100 V
C4	47 μ F/50 V	47 μ F/50 V
CY1, CY2	2.2 nF/2 kV	

EMC RECOMMENDED CIRCUIT (CONTINUED)

Figure 6
Dual output

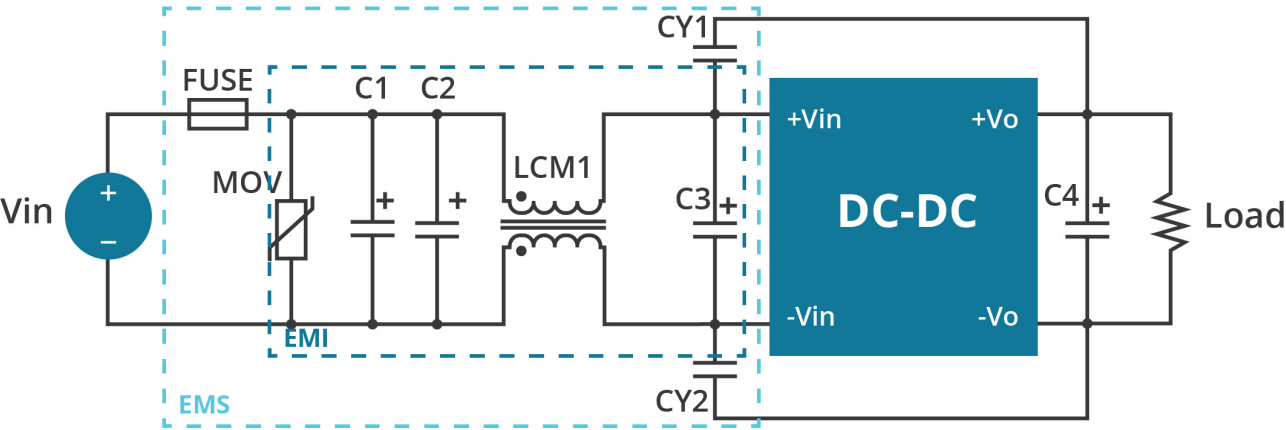



Table 5

COMPONENT	24 Vdc	48 Vdc
Fuse	TBD by customer	
MOV1	14D560K	14D101K
LCM1	5 mH	
C1, C2, C3	330 μ F/50 V	330 μ F/100 V
C4	47 μ F/50 V	47 μ F/50 V
CY1, CY2	2.2 nF/2 kV	


TRIM RESISTOR AND CALCULATION (SINGLE OUTPUT MODELS ONLY)

Figure 7

Trim up

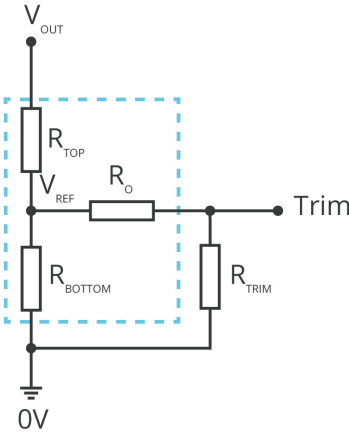

Trim down

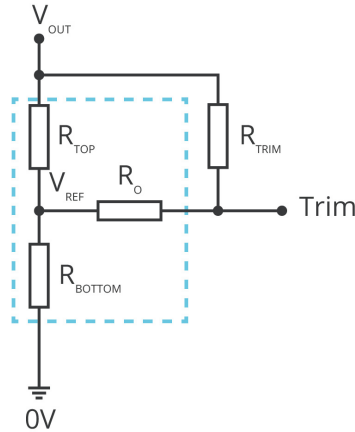

$$R_{TRIM} = \frac{a \cdot R_{BOTTOM}}{R_{BOTTOM} - a} - R_O$$
$$a = \frac{V_{REF}}{V_{OUT} - V_{REF}} \cdot R_{TOP}$$

Formula for Trim up

$$R_{TRIM} = \frac{a \cdot R_{TOP}}{R_{TOP} - a} - R_O$$
$$a = \frac{V_{OUT} - V_{REF}}{V_{REF}} \cdot R_{BOTTOM}$$

Formula for Trim down

Table 6

V _{NOM}	R _{TOP}	R _{BOTTOM}	R _O	V _{REF}
(Vdc)	(kΩ)	(kΩ)	(kΩ)	(V)
3.3	4.22	2.55	18	1.25
5	5.10	5.10	20	2.50
9	9.31	3.58	24	2.50
12	18.0	4.75	33	2.50
15	18.0	3.60	30	2.50
24	30.0	3.48	30	2.50
28	20.0	2.94	30	2.50

Note: Value for R_{TOP}, R_{BOTTOM}, R_O, and V_{REF} refer to Table 6 (fixed internal values).
R_{TRIM}: Trim resistance
a: User-defined parameter, no actual meanings
V_{NOM}: Nominal output voltage
V_{OUT}: Target output voltage

REVISION HISTORY

rev.	description	date
1.0	initial release	05/29/2025

The revision history provided is for informational purposes only and is believed to be accurate.



15575 SW Sequoia Pkwy #100
Portland, OR 97224
800.275.4899

Fax 503.612.2383
belfuse.com
powersupport@belf.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.