

# Integrated Circuits

## Selection Guide

High Voltage, Analog & Mixed Signal ICs,  
Optically Isolated Devices



## Design with Confidence

Supported by our Deep Application Expertise and Extensive Portfolio

### About this guide

IXYS Integrated Circuits, formerly a wholly owned subsidiary of IXYS Corporation, is now part of Littelfuse, Inc. IXYS Integrated Circuits designs, manufactures, and markets a wide variety of semiconductor devices and is a major provider of optically isolated electronic components.

IXYS Integrated Circuits' unique mix of high voltage wafer fabrication, isolation barrier expertise, multi-chip packaging experience, and expertise in analog, mixed signal, and power design, points the way to greater functionality in a smaller footprint at lower cost for your designs.

Topic	Page	Topic	Page
Products	4	Solid State Relay Product Specifications	22-30
Solid State Relays	5-8	Fault Protected Solid State Relay Product Specifications	31-32
IGBT & MOSFET Gate Drivers	9-10	Optically Isolated Power Relay Product Specifications	33
Sic MOSFET & IGBT Gate Drivers	11	Optically Isolated AC Power Switch Product Specifications	34-37
IGBT & MOSFET High-Speed Gate Drivers	12-13	IGBT & MOSFET Low-Side Gate Driver Product Specifications	38-40
High Voltage Isolated Analog Switches	14-15	SIC MOSFET & IGBT Low-Side Gate Driver Product Specifications	41
Optocouplers	16	IGBT & MOSFET High-Speed Gate Driver Product Specifications	42-43
MOSFETs	17	Optically Isolated Gate Driver Product Specifications	44
Non-Volatile Digitally Programmable Capacitors	18	Linear/Standard Optocoupler Product Specifications	45
High Voltage LED Drivers	19	Depletion Mode MOSFET Product Specifications	46
Multifunction Products: SSR/Optocouplers	20	Telecommunication Product Specifications	47
Voltage Monitoring & Sensing IC	21	Multifunction Product: SSR/Optocoupler Product Specifications	48-49

Specifications, descriptions, and illustrative material in this literature are as accurate as known at the time of publication, but are subject to changes without notice. Visit [Littelfuse.com](https://www.littelfuse.com) for more information.

OptoMOS® is a registered trademark of IXYS Integrated Circuits

### Littelfuse: Everywhere, Every Day

Founded in 1927, Littelfuse has become the world's most respected circuit protection brand, with well-established and growing platforms in power control and sensing technologies. Today, we are a global company, offering a diverse and extensive product portfolio—fuses, semiconductors, polymers, ceramics, relays, sensors, and more—serving the electronics, automotive, and industrial markets. Each is manufactured to exacting quality standards and backed by an unwavering commitment to technical support and customer service.

Our history of innovation, combined with our customer-first culture, drives us to collaborate with you to develop safer, more reliable products that are energy efficient and compliant with global regulations. We will partner with you to solve complex problems wherever electrical energy is used, bringing design, engineering, and technical expertise to deliver business results.

### Why Choose Littelfuse

Littelfuse is the global leader in circuit protection solutions. We are the only company to offer all of the pertinent circuit protection technologies, with products that can be used in virtually everything that uses electrical energy. Complementing our wide portfolio of circuit protection products is a global network of design and technical support expertise. We offer decades of design experience to help you address application challenges and achieve regulatory compliance.

#### Your Single Source

Littelfuse offers an extensive circuit protection product line. We design forward-thinking, application-specific solutions to provide assurance that your most demanding requirements will be met. Our goal is to provide the most complete range of options so that you will not have to compromise.

#### Testing Support

Littelfuse can help ensure that your products will withstand most common threats repeatedly and will fail safely under extreme circumstances. We can serve as an independent source to provide assistance as you design by offering lab testing capabilities for customer applications. This testing includes industry-specific required power fault and Electrostatic Discharge (ESD) / Electrically Fast Transients (EFT) / lightning surge conditions.

#### Application Knowledge

For over 90 years, Littelfuse has maintained a focus on circuit protection, and we will continue to adapt as technologies evolve. Engineers and circuit designers around the world have come to rely on Littelfuse products and application knowledge to support their designs.

#### Global Support

Littelfuse stays close to customers. With manufacturing, lab, and design facilities located around the globe, application knowledge and technical support are locally available. Also, we offer a network of regional customer support offices and hundreds of independent authorized distributor contacts to assist you. Visit [Littelfuse.com/contact-us](https://www.littelfuse.com/contact-us) to find local support near you.

#### Standards Compliance Expertise

Most Littelfuse products comply with a wide range of applicable industry and government guidelines as well as our own rigorous quality and reliability criteria. We continually look forward and adapt to changing requirements so that our products will comply with industry-specific national and international standards, such as CCC, CSA, IEC, IEEE, ISO, ITU, Meti, RoHs, Telcordia, TIA, and many more.

#### Operational Excellence

With our global manufacturing footprint, Littelfuse is firmly committed to manufacturing quality products at a competitive price. We build quality into our products and services, striving for zero defects in everything we do, thereby reducing cost and increasing your total satisfaction. We strive to exceed your expectations every day.

#### Quality Assurance

Our global manufacturing facilities abide by strict quality assurance requirements and hold the following quality management system registrations:

- ISO 9001
- ISO14001
- IATF 16949

IXYS Integrated Circuits, formerly a wholly owned subsidiary of IXYS Corporation, is now part of Littelfuse, Inc. IXYS Integrated Circuits designs, manufactures, and markets a wide variety of semiconductor devices and is a major provider of optically isolated electronic components. IXYS Integrated Circuits' unique mix of high voltage wafer fabrication, isolation barrier expertise, multi-chip packaging experience, and expertise in analog, mixed signal, and power design, points the way to greater functionality in a smaller footprint at lower cost for your designs.



### IGBT & MOSFET Drivers

High voltage, low-side, and optically isolated IGBT and MOSFET drivers, many of which are AEC-Q100 qualified.



### SiC-Gate Drivers

Specialized drivers for SiC-MOSFETs and high power IGBTs.



### IGBT & MOSFET Drivers

- High-Side and Low-Side
- Half-Bridge
- 3-Phase



### Solid State Relays (SSR)

One of the industry's broadest lines of optically isolated SSRs, available in a wide selection of configurations, blocking voltages, and load currents.



### Fault Protected Solid State Relays

Active current limiting SSRs with thermal management.




### Normally Open Power Relays

Packages with heat dissipating, isolating ceramic substrate that are heat-sink compatible for higher current applications.



### Optically Isolated AC Power Switches

SCR-based AC Power Switches (zero-cross & rapid turn-on).



### N-Channel Depletion Mode MOSFETs

Normally closed discrete small power MOSFETs.




### LED Drivers

High-efficiency, high-brightness LED drivers with wide input operating voltage range up to 550V<sub>DC</sub>.



### HV Switch Arrays

High voltage isolated analog switch arrays.



### Non-volatile Digitally Programmable Capacitors

Provide capacitive offset trimming for capacitance sensitive circuits.



### Multifunction SSR/Optocouplers

Allows designers to consolidate circuit functions into a single device.



### Telecommunications Market

Phone-line interface and monitoring devices.

## Solid State Relays

IXYS Integrated Circuits' line of solid state relays is one of the broadest in industry. The devices use discrete semiconductor components and the patented OptoMOS® architecture to deliver fast, reliable, bounce-free switching in a compact design. Semiconductor relays are an ideal replacement for larger reed and electromechanical relays. Compared to these old electromagnetic technologies, our OptoMOS® relays offer significantly lower drive current, small package size, no susceptibility to magnetic interaction, and solid state reliability. All of these are key requirements for the design of today's complex, low-power, multi-channel products.


### Features & Benefits

- Low drive current
- High reliability
- No EMI/RFI generation
- AC or DC switching
- Current limiting devices available
- Fault protected versions available
- Low off-state leakage

### Applications

- Instrumentation
- Multiplexers
- Data acquisition/electronic switching
- Meters (Watt-hour, water, gas)
- Medical equipment (patient/equipment isolation)
- Security
- Industrial controls
- Telecomm / datacomm

### Output Configurations

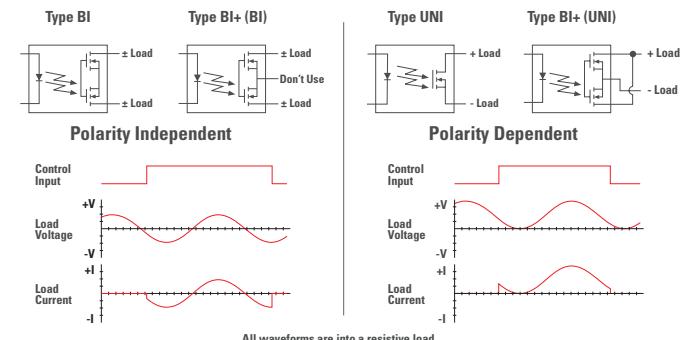

Type BI relays conduct load current in both directions.

Type BI+ relays, in BI configuration, conduct load current in both directions.

Type UNI relays conduct load current from the positive terminal to the negative terminal only.

Type BI+ relays, in UNI configuration with output MOSFETs wired in parallel, enable higher load current from positive terminal to negative terminal only.

The accompanying SSR tables reference these types (BI, BI+, & UNI) for all devices listed.



4-Pin  
SOP



4-Pin  
Surface  
Mount



6-Pin  
Surface  
Mount



8-Pin  
Surface  
Mount



8-Pin  
SOP



4-Pin  
DIP



6-Pin  
DIP



8-Pin  
DIP



6-Pin  
Flatpack  
(8-Pin  
Body)



4-Pin  
V-DIP



Power  
SOIC



8-Pin  
Flatpack



16-Pin  
SOIC



Power  
SIP

Note – Images are to scale

## Fault Protected Relays

### Active Current Limiting SSRs with Voltage Triggered Shutdown & Thermal Management

All of the Fault Protected Solid State Relays (SSR) listed below feature Active Current Limiting and Thermal Management while the CPC1540, CPC1563, and CPC1593 additionally feature Voltage Triggered Shutdown, or VTS.

Fault Protected SSRs can directly replace footprint-compatible standard SSRs in existing designs to improve end-product survivability.

These Fault Protected relays resume normal operation upon removal of the fault condition or upon cycling the input control current. Should the fault condition repeat or persist, the fault protection will immediately resume.

**Active Current Limiting:** All Fault Protected SSRs limit load current to protect both the load and the SSR.

**Voltage Triggered Shutdown:** CPC1540, CPC1563, and CPC1593 incorporate a third protection feature called Voltage Triggered Shutdown (VTS).


During a current limiting event this advanced thermal management protection feature reduces the relay current to  $<100\mu\text{A}$  whenever the voltage drop across the relay exceeds a non-adjustable predetermined threshold thereby preventing excessive heating of the SSR.

**Thermal Management:** All Fault Protected relays include the traditional thermal management feature that deactivates the SSR outputs anytime the die temperature exceeds a safe limit regardless of the Active Current Limiting state and when equipped, the Voltage Triggered Shutdown state. This feature provides excellent power cross immunity.

#### Features & Benefits

- Provide excellent power-cross immunity
- Resumes normal operation after fault is removed
- Ideal for use in electromagnetically noisy environments

Part Number	Blocking Voltage (V <sub>P</sub> )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		* VTS Threshold	Switching Speed (t <sub>on</sub> / t <sub>off</sub> ) (ms)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
			DC-Only (Ω)	AC (Ω)	DC-Only (mA)	AC (mA)	DC-Only (mA <sub>P</sub> )	AC (mA <sub>P</sub> )				
CPC1510	250	2	3.75	15	350	200	920	450	-	2 / 2	3750	Industrial applications
CPC1511	230	2.5	-	4	-	450	-	1400	-	4 / 2	3750	Industrial applications
CPC1540	350	2	6.75	25	250	120	570	285	100	2 / 2	3750	PSTN hook switch applications
CPC1560	60	1.1	1.4	5.6	600	300	1500	900	-	0.1 / 0.4	3750	Fast switching speeds
CPC1561B	60	2.5	-	0.245	-	1000	-	3000	-	2.5 / 0.5	3750	1A Load current rating to 60°C
CPC1563	600	2	11.75	35	250	120	570	285	100	2 / 2	3750	High blocking voltage
CPC1593	600	2	11.75	35	250	120	570	285	21	2 / 2	3750	Power supply start-up

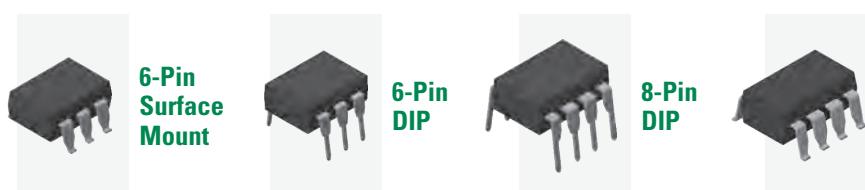

Note – Images are to scale

## Optically Isolated Power Relays


For power applications requiring a non-biased heat sink, the i4-PAC and ISOPLUS-264 power relays are an ideal solution. These devices utilize isolated Direct Copper Bond (DCB) ceramic substrates which have got superior thermal properties. These power relay devices are specified for both, to operate free air and mounted on a heat sink.

#### Features & Benefits

- Blocking voltage up to 1000V<sub>P</sub>
- On-resistance as low as 0.05 Ohm
- Turn-on/off switching speeds from 5ms to 25ms
- MOSFET-based AC/DC and DC-only power relays
- Load current up to 22.8A<sub>DC</sub> (with 5°C/W heat sink)
- 2500V<sub>RMS</sub> isolation from input to output and to the ceramic substrate
- Isolated, low thermal impedance pad for heat sink applications
- Low input control current
- Low thermal impedances, junction to case ( $\theta_{JC}$ ):
  - 0.30°C/W - ISOPLUS-264
  - 0.35°C/W - i4-PAC

#### Applications

- Medical equipment
- Railroad/traffic controls
- Industrial control
- Test and measurement equipment

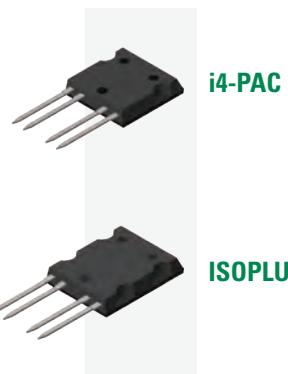


i4-PAC




ISOPLUS-264

Note – Images are to scale

#### 1-Form-A Bidirectional

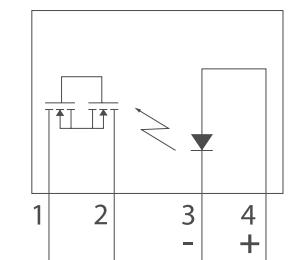

#### 1-Form-A Unidirectional

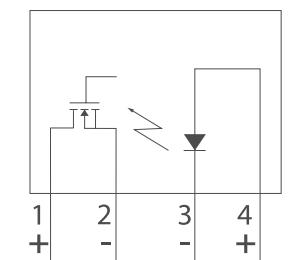

Heat dissipating, isolating ceramic substrates are heat-sink compatible for higher current applications.



## What is Direct Copper Bonding (DCB)?

ISOPLUS-264™ and i4-PAC packages utilize DCB ceramic substrates instead of the usual copper lead frame. **DCB** stands for Direct Copper Bonding and denotes a process in which copper and a ceramic material are fused together, at high temperatures.

The design of these patented packages is revolutionary: The silicon chips are soft soldered onto the DCB ceramic substrate which provides both, high isolation capability of 2500V<sub>RMS</sub> with an unbeatable low thermal resistance compared to conventional, externally mounted isolation materials.


## Solid State Relays

### Optically Isolated AC Power Switches

The OptoMOS® line of AC Power Switches use dual power SCR thyristor outputs to produce an alternative to optocoupler and Triac circuits. The input and output circuits are optically coupled to provide up to 5000V<sub>RMS</sub> of galvanic isolation and noise immunity between control and load circuits. The product line includes devices with blocking voltages of up to 800V<sub>AC</sub> peak. Long life and environmental integrity make these power switches ideal for controlling a variety of AC load circuits. Available are versions with zero-cross and rapid turn-on switching characteristic:

**Zero-cross turn-on** devices feature tightly controlled zero-cross circuitry that minimizes the generation of transients when turning on AC loads.

**Rapid turn-on** devices turn on the load when the control input goes true regardless of the load voltage phase, and turn off when the load current crosses zero. Rapid turn-on devices are predominantly used to control inductive loads like motors, valves, or solenoids.

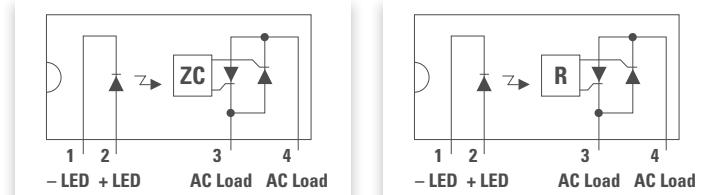


#### Features & Benefits

- Load current range from 250mA to 20A (with 5°C/W heat sink)
- 5mA input sensitivity
- Low EMI and RFI generation
- DC control, AC switching
- Optically isolated
- High noise immunity
- Input to output isolation from 2500V<sub>RMS</sub> to 5000V<sub>RMS</sub>

#### Applications

- Programmable controls
- Process control
- Power control panels
- Remote switching
- Gas pump electronics
- Contactors
- Solenoids
- Motor controls
- Heater controls

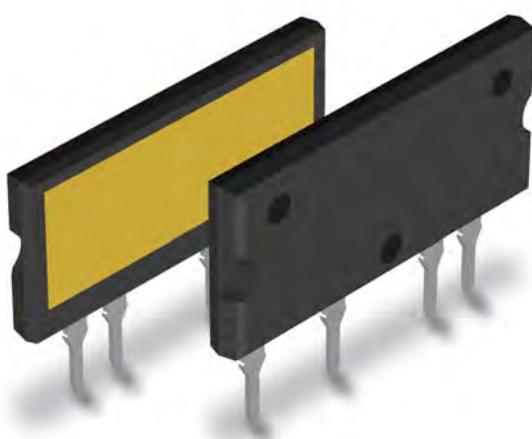

8  
Note – Images are to scale

## IGBT & MOSFET Gate Drivers

### CPC1596: 570V Optically Isolated Load-Biased Gate Driver

The CPC1596 is an optically isolated, load-biased Gate Driver that requires no additional power supply to bias the external MOSFET gates; in the off-state it regulates the voltage drawn from the load (up to 570V) down to 12.2V for internal use. It is specifically designed for low duty cycle switching applications such as an optically isolated DC relay using a single MOSFET or an AC relay with two MOSFETs.

The CPC1596 accomplishes very fast MOSFET turn-on by supplying charge stored in an external capacitor to the MOSFET gate when input control current is applied to the device's LED. After the MOSFET is turned on, photocurrent from the internal optocoupler keeps the MOSFET active for as long as sufficient input control current is applied assuring very low-frequency operation. When the MOSFET is turned off, the storage capacitor charges from the load voltage via the regulated internal voltage in preparation for the next turn-on.

Provided in a small, 8-pin package and requiring no separate power supply, the CPC1596 provides a flexible design solution that minimizes PCB real estate.


#### Features & Benefits

- Requires No Load-side Power Supply
- Drives External Power MOSFET
- Only 2.5mA Input LED Current to Drive External MOSFET
- 3750V<sub>RMS</sub> Input-to-Output Isolation



#### Applications

- Industrial Controls
- Instrumentation
- Medical Equipment Isolation
- Electronic Switching
- I/O Subsystems
- Appliances

#### CPC1596 AC Application Circuit

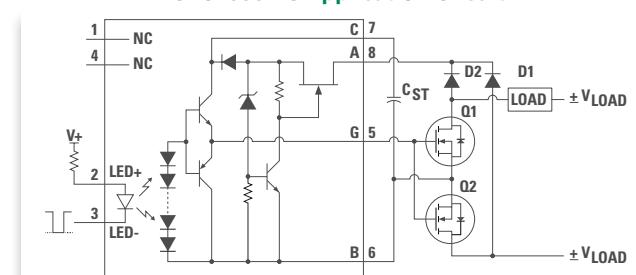

#### CPC1596 DC Application Circuit

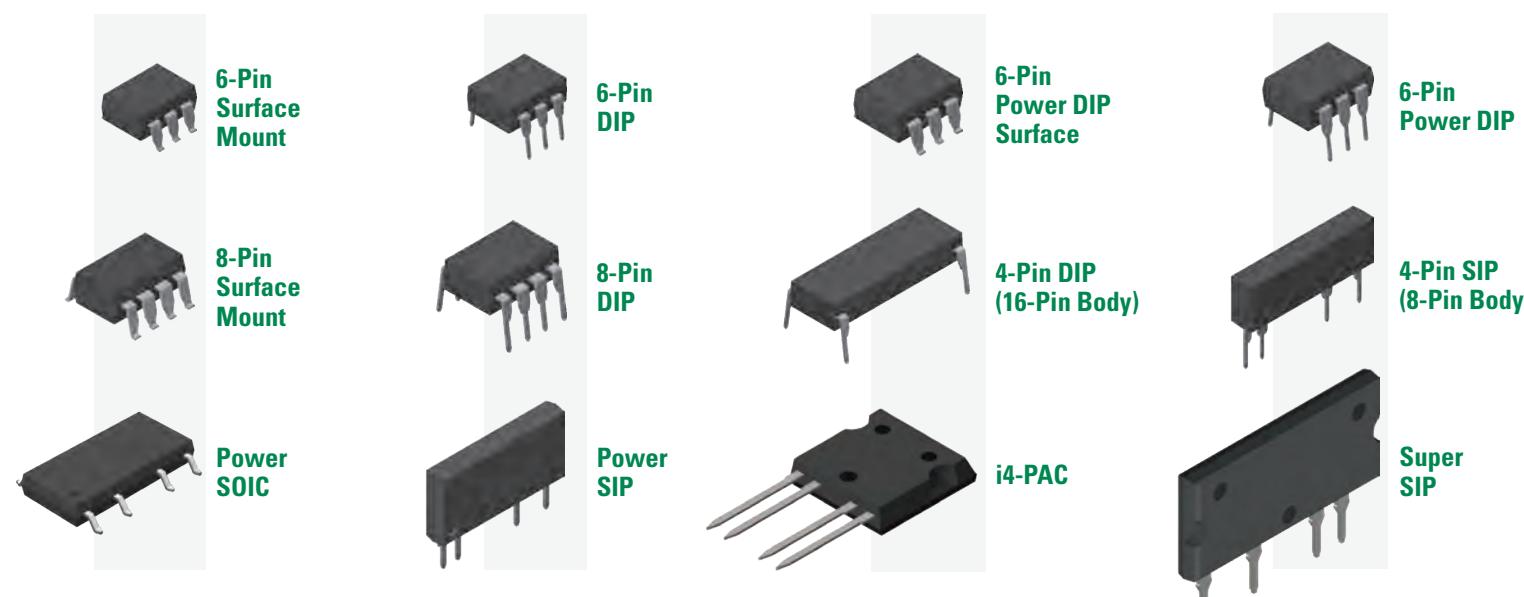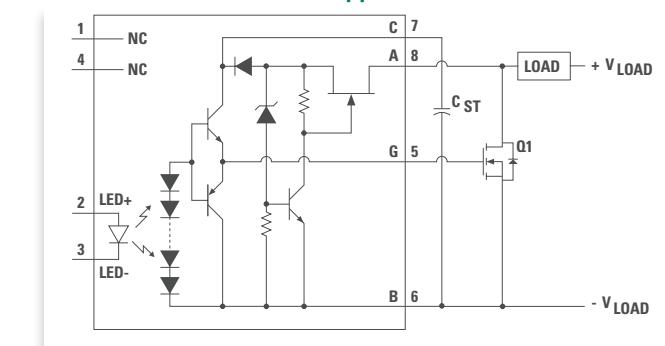

9  
Note – Images are to scale

### Low-Side Gate Drivers

IXYS Integrated Circuits offers powerful families of ultra-fast Low-Side Gate Drivers for MOSFETs and IGBTs, with a large mix of logic configurations, packaging, and drive current capabilities. Five of these devices are AEC-Q100 qualified.

Single-output and dual-output low-side driver ICs include selectable options for logic combinations. The range of current ratings offered is the broadest available, extending to 30A peak, which is the LARGEST PEAK DRIVE CURRENT capability for an integrated driver on the market. In all series devices, internal circuitry eliminates cross conduction and current "shoot-through," and the driver is virtually immune to latch up.



#### Features & Benefits

- 1.5A to 30A peak source/sink drive current
- Wide operating voltage range up to 35V
- $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  extended operating temperature range
- Logic input withstands negative swing of up to  $-5\text{V}$
- Dual drivers have matched rise and fall times
- Low propagation delay time
- Low output impedance



#### Applications

- Efficient power MOSFET and IGBT switching
- Switch mode power supplies
- Motor controls
- DC to DC converters
- Class-D switching amplifiers
- Pulse transformer driver

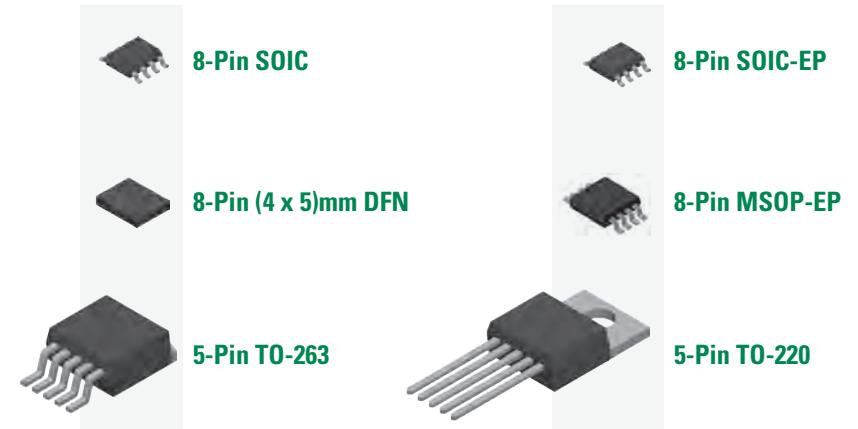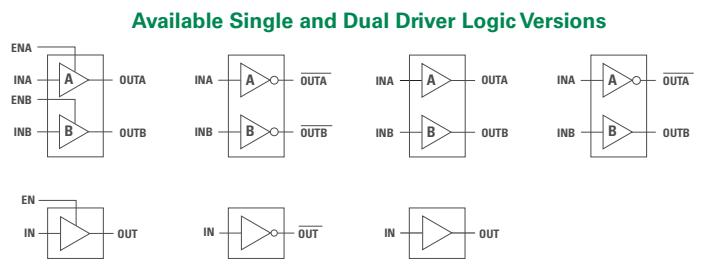

Note – Images are to scale.

### Optically Isolated Photovoltaic Gate Drivers

Photovoltaic gate drivers couple infrared light emitting diodes with proprietary photovoltaic integrated circuits to provide  $3750\text{V}_{\text{RMS}}$  of input-to-output isolation. When input current is applied to the LED, the emitted light will be converted by the photodiode array to electrical energy and generate a floating voltage at the output. In addition to providing voltage for turn-on of discrete MOSFETs, these patented ICs feature a gate-clamping circuit to provide fast turn-off. Used in conjunction with discrete MOSFETs, these gate drivers are well suited for use in discrete solid state relay designs and other isolated switching applications.


#### Features & Benefits

- Isolated 5.5V and 12V photovoltaic output
- Floating outputs for parallel or series configuration
- Dual optically isolated photovoltaic devices

#### Applications

- MOSFET driver
- Isolated floating power source
- Discrete solid state relay designs

#### Dual Optically Isolated Photovoltaic Driver

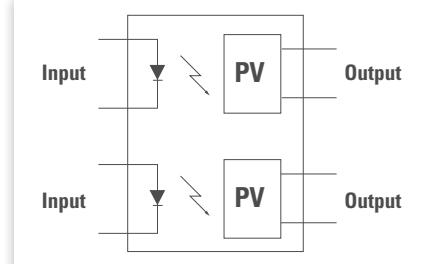

### IX4351NE 9A Low-Side Gate Driver

#### IX4351NEAU AEC-Q100 Automotive Qualified Version

The IX4351NE is designed specifically to drive SiC MOSFETs and high power IGBTs. Separate 9A source and sink outputs allow for tailored turn-on and turn-off timing while minimizing switching losses. An internal negative charge regulator provides a selectable negative gate drive bias for improved dV/dt immunity and faster turn-off.

Desaturation detection circuitry senses an overcurrent condition of the SiC MOSFET or IGBT and initiates a soft turn off, thus preventing a potentially damaging dV/dt event. The non-inverting logic input, IN, is TTL and CMOS compatible; internal level shifters provide the necessary bias to accommodate negative gate drive bias voltages. Additional protection features include UVLO detection and thermal shutdown. An open drain FAULT output signals a fault condition to the microcontroller.



The IX4351NE is rated for an operational temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , and is available in a thermally enhanced 16-pin narrow SOIC package.

#### Features & Benefits

- AEC-Q100 Automotive-Grade qualified: IX4351NEAU
- Separate 9A peak source and sink outputs
- $V_{\text{DD}}$  input supply voltage range:  $+13\text{V}$  to  $+25\text{V}$
- Adjustable gate drive voltage range:  $-10\text{V}$  to  $+25\text{V}$
- Internal logic level shifters
- Desaturation detection with soft shutdown sink driver
- Under Voltage Lockout (UVLO)
- Thermal shutdown
- Open drain FAULT output
- TTL and CMOS compatible input

#### Applications

- Driving SiC MOSFETs and IGBTs
- On-board charger and DC charging station
- AC/DC and DC/DC converters
- Industrial power inverters
- Motor controllers

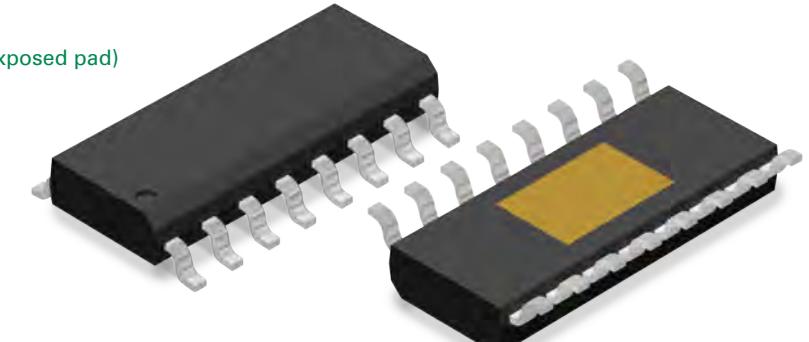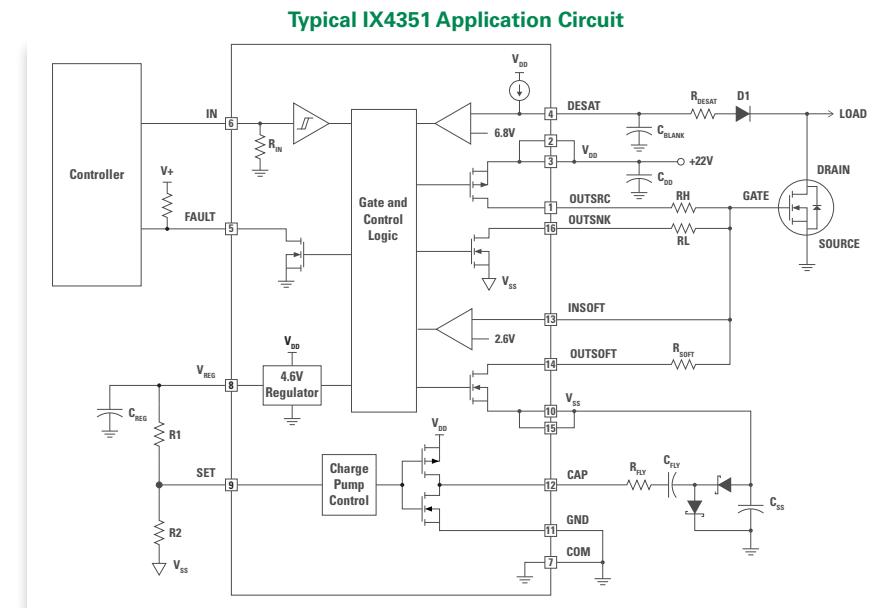

IX4351NE and IX4351NEAU  
(16-pin narrow SOIC package with exposed pad)

### High-Side and Low-Side Gate Driver ICs

High-side and low-side drivers control two N-Channel MOSFETs or IGBTs in fast switching applications. The gate driver converts PWM input signals into gate-signals compatible to MOSFETs or IGBTs, providing a robust and efficient power semiconductor control. An integrated bootstrap circuit is generating a floating voltage with enables the high-side driver to operate up to 600V<sub>DC</sub>.

The drivers accept wide V<sub>DD</sub> supply voltage as well as wide logic input voltage ranges. Various built-in protection features ensure safe operation of the driver and the driven power semiconductors.

#### Features & Benefits

- High-side operation up to 600V<sub>DC</sub>
- Outputs tolerant to negative transients
- Supply voltage range: 10V to 20V
- Logic input voltage range: 3.3V to 20V
- Cycle-by-cycle edge-triggered shutdown circuitry
- Under Voltage Lockout (UVLO)
- Operating temperature range: -40°C to +125°C



8-Pin SOIC



14-Pin SOIC




16-Pin SOIC

#### Applications

- DC-DC Converters
- AC-DC Inverters
- Motor Controls
  - Servo Motor Control
  - Pumps and Fans
- Class D Power Amplifiers
- Uninterruptable Power Supplies (UPS)
- Welding
- Induction Cooking

#### LF2110 and LF2113 Application Circuit

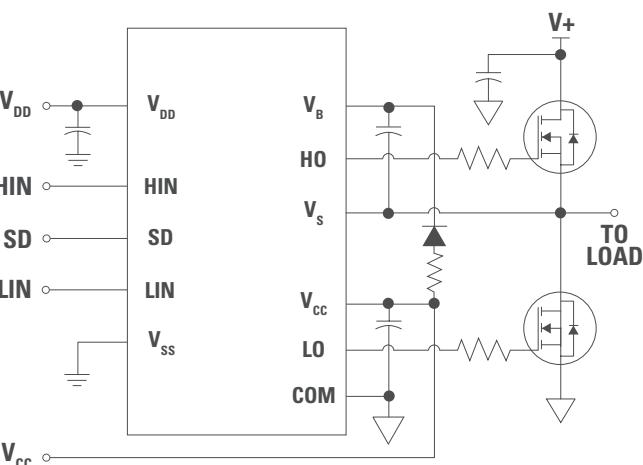

### Half-Bridge Gate Driver ICs

Half-bridge gate drivers control two N-Channel MOSFETs or IGBTs in fast switching applications. The gate driver converts PWM input signals into gate-signals compatible to MOSFETs or IGBTs, providing a robust and efficient power semiconductor control. An integrated bootstrap circuit is generating a floating voltage with enables the high-side driver to operate up to 600V<sub>DC</sub>.

The drivers accept wide V<sub>DD</sub> supply voltage as well as wide logic input voltage ranges. Various built-in protection features ensure safe operation of the driver and the driven power semiconductors.

#### Features & Benefits

- High-side operation up to 600V<sub>DC</sub>
- Outputs tolerant to negative transients
- Supply voltage range: 10V to 20V
- Logic input voltage range: 3.3V to 20V
- Fixed or programmable deadtime
- Cycle-by-cycle edge-triggered shutdown circuitry
- Under Voltage Lockout (UVLO)
- Operating temperature range: -40°C to +125°C

#### Applications

- Motor Controls / Drives
- Stepper Motor Drives
- DC/DC-Converters
- AC/DC-Inverters
- Robotics
- Cordless Power Tools
- Drones




8-Pin SOIC



14-Pin SOIC

#### LF2103 Application Circuit

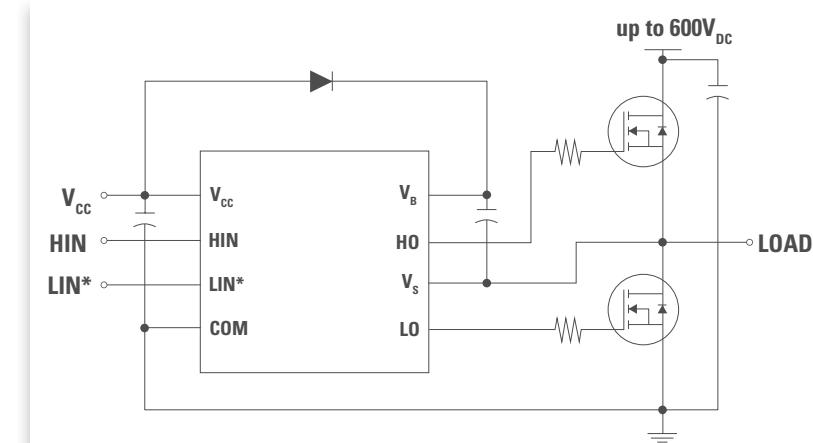

### Littelfuse MOSFET and IGBT Devices



#### Discrete Packaged MOSFETs

Littelfuse's broad and deep Power MOSFETs portfolio includes linear and depletion mode Power MOSFETs that set the industry standard for high-voltage, high-power discrete MOSFETs applications.



Scan the code to learn more.



#### Discrete Packaged IGBTs

Littelfuse offers the largest selection of IGBT devices on the power semiconductor market. Benefits include low energy losses and exceptional device ruggedness while maintaining low on-state voltages.



Scan the code to learn more.

### 3-Phase Half-Bridge Gate Driver ICs

Switching three pairs of N-Channel MOSFETs or IGBTs in 6-pack configurations is a challenge in fast switching applications. 3-phase gate drivers convert PWM input signals into gate-signals compatible to MOSFETs or IGBTs, providing a robust and efficient power semiconductor control.

Integrated bootstrap circuits are generating floating voltages with enables the three high-side drivers to operate up to 600V<sub>DC</sub>.

The drivers accept wide V<sub>DD</sub> supply voltage as well as wide logic input voltage ranges. Various built-in protection features ensure safe operation of the driver and the driven power semiconductors.

#### Features & Benefits

- High-side operation up to 600V<sub>DC</sub>
- Outputs tolerant to negative transients
- Supply voltage range: 10V to 20V
- Logic input voltage range: 3.3V to 20V
- Cycle-by-cycle edge-triggered shutdown circuitry
- Under Voltage Lockout (UVLO)
- Matched propagation delay times
- Cross conduction prevention logic
- Shoot-through protection logic
- Internal deadtime
- Operating temperature range: -40°C to +125°C

#### Applications

- 3-Phase Motor Drives
- White Goods
  - Pump Motors
  - Compressor Motors
  - Fan Motors
- Air Conditioners
- Cordless Power Tools
- Robotics




20-Pin SOIC



28-Pin SOIC

#### LF2136 Application Circuit

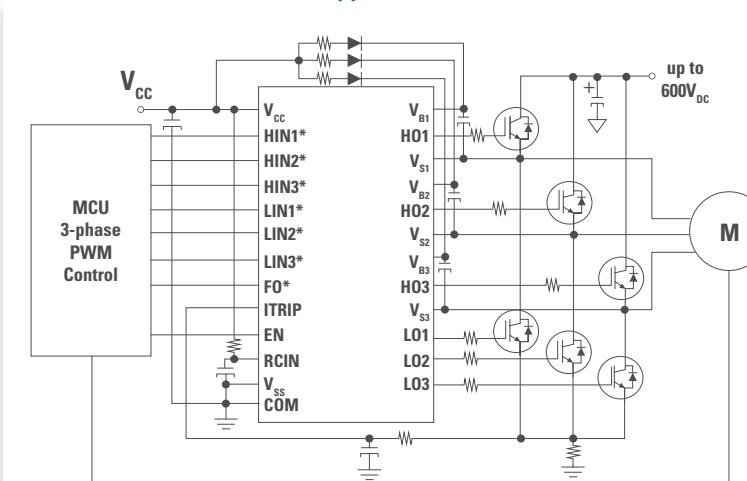



## Optocouplers

### Linear Optocouplers

IXYS IC Division linear optocouplers features an infrared LED optically coupled with two photodiodes. One feedback (input) photodiode is used to generate a control signal that provides a servomechanism to the LED drive current, thus compensating for the LED's nonlinear time and temperature characteristics. The other (output) photodiode provides an output signal that is linear with respect to the servo LED current. The devices feature wide bandwidth, high input to output isolation, and excellent servo linearity.

#### Features & Benefits

- Couples analog & digital signals
- 3750V<sub>RMS</sub> input-to-output isolation
- 200kHz bandwidth in photoconductive mode
- 40kHz bandwidth in photovoltaic mode
- High gain stability
- Low input-to-output capacitance
- Low power consumption
- 0.01% servo linearity
- THD 87dB typical

#### Applications

- Power supply feedback voltage/current
- Industrial and medical sensors
- Isolation of process control transducers
- Isolated 4-20mA converters



8-Pin DIP



8-Pin Surface Mount



8-Pin Flatpack

Note – Images are to scale

### Single Optocouplers

Optocouplers provide an optically means of switching control circuits. The package contains a phototransistor that is optically coupled with a LED. A shunt resistor can be used to adjust the threshold current required to activate the output circuitry.

Optocouplers are ideal for Telecom, Industrial Control and instrumentation circuits, where electrical isolation of control circuitry is crucial.

#### Features & Benefits

- 100mA continuous load rating
- Breakdown voltage: 30V
- Minimum current transfer ratio: 100%
- 1500V<sub>RMS</sub> Input/Output isolation
- 4-pin SOP package


#### Applications

- Logic signal isolation
- Sensor circuitry
- Instrumentation
- Industrial control



4-Pin SOP

CPC1001N



## MOSFETs

### N-Channel Depletion Mode MOSFETs

IXYS Integrated Circuits' N-channel depletion mode field effect transistors (FET) utilize a proprietary third generation vertical DMOS process which realizes world-class, high voltage MOSFET performance in an economical silicon gate process. The vertical DMOS process yields a robust device for high power applications with high input impedance. These highly reliable FET devices have been used extensively in our solid state relays for industrial and telecommunications applications.


#### Features & Benefits

- Normally closed depletion mode devices offer low R<sub>DS(on)</sub> at cold temperatures
- High input impedance
- Low input capacitance
- Fast switching speeds
- Low input and output leakage


#### Applications

- Power fail switches
- Discrete normally closed relays
- Constant current, high brightness LED drivers
- High voltage pre-regulators
- Power inverters
- Power supplies



#### Depletion Mode MOSFET

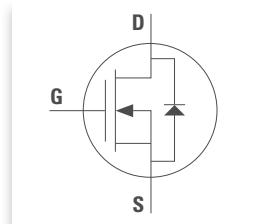


#### FDA217 used with CPC3980 MOSFETs to create Normally Closed Solid State Relay

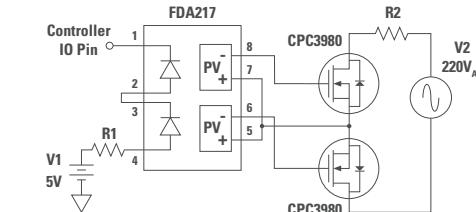



#### High Voltage Off-line Linear Voltage Regulator

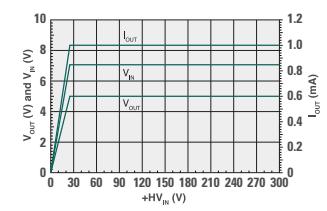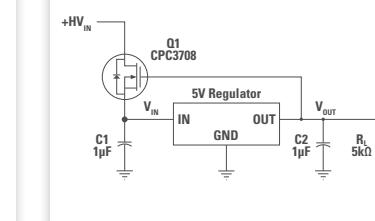

#### N-Channel Depletion Mode MOSFET as Pre-Regulator

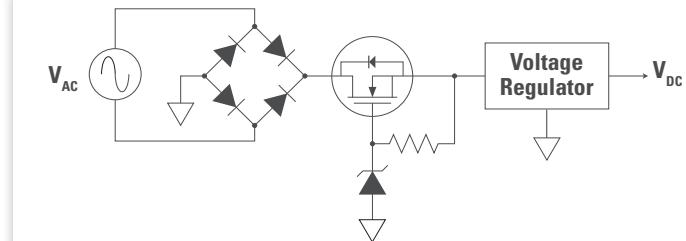

#### High Voltage Ramp Generator

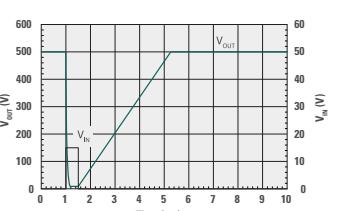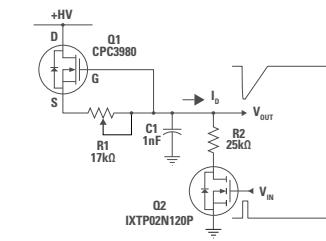

SOT-23



SOT-89



SOT-223

Note – Images are to scale

## Non-Volatile Digitally Programmable Capacitors

### NCD2400M: Wide Capacitance Range, Non-volatile, Digital Programmable Capacitor


The NCD2400M is a dedicated electronic calibrator for oscillators, with reliable performance at 105°C as required by OCXO applications. This product can be used in series or shunt configuration, to support a wide variety of tuning circuit topologies. Digitally controlled capacitance trimming information is communicated via a 2-wire (I<sup>2</sup>C compatible) interface. The calibration value can be stored in the internal, re-programmable, non-volatile memory.

#### Features & Benefits

- Series and shunt configurations supported:
  - $C_{\text{shunt}} = 12.5\text{pF}$  to  $194\text{pF}$  in discrete  $355\text{fF}$  steps
  - $C_{\text{series}} = 1.7\text{pF}$  to  $194\text{pF}$  in discrete  $376\text{fF}$  steps
- 512-state digital programmable capacitor
- Operating frequency range of DC to 150MHz
- Operation at 105°C
- 2-wire (I<sup>2</sup>C compatible) serial interface
- EEPROM non-volatile memory
- 2.5V to 5.5V Input Supply Voltage Range
- 2mm x 2mm (DFN-6)

#### Applications

- VCXOs
- Crystal oscillators
- Tunable RF stages
- RFID tags
- Industrial wireless control
- Capacitor sensor trimming

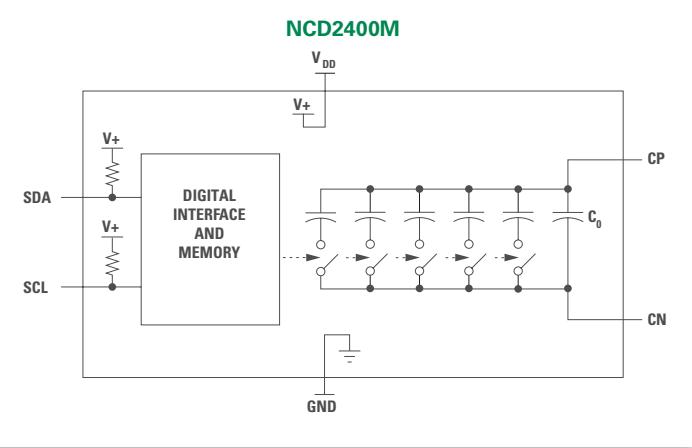

### NCD2100: Non-Volatile Digital Programmable Capacitor

The NCD2100 is an EEPROM-based digitally programmable variable capacitor that provides capacitive offset trimming for capacitance sensitive circuits. Programming the non-volatile EEPROM register value or implementing on demand capacitance value changes are easily accomplished by means of the simple two-wire serial bus. To ensure interoperability over a broad array of design environments, the device is rated for operation with supply voltages of 2.5V to 5.5V across the temperature range of -40°C to +85°C.

#### Features & Benefits

- Capacitance range 6.6pF to 37.553pF
- 1024 programmable capacitance values
- Operating frequency range 200kHz to 250MHz
- Smallest capacity step size: 63fF
- 2mm x 2mm (DFN-6), 2.9mm x 2.8mm (TSOT-6)

#### Applications


- VCXOs
- Crystal oscillators
- Tunable RF stages
- RFID tags
- Industrial wireless control
- Capacitor sensor trimming



DFN-6



TSOT-6

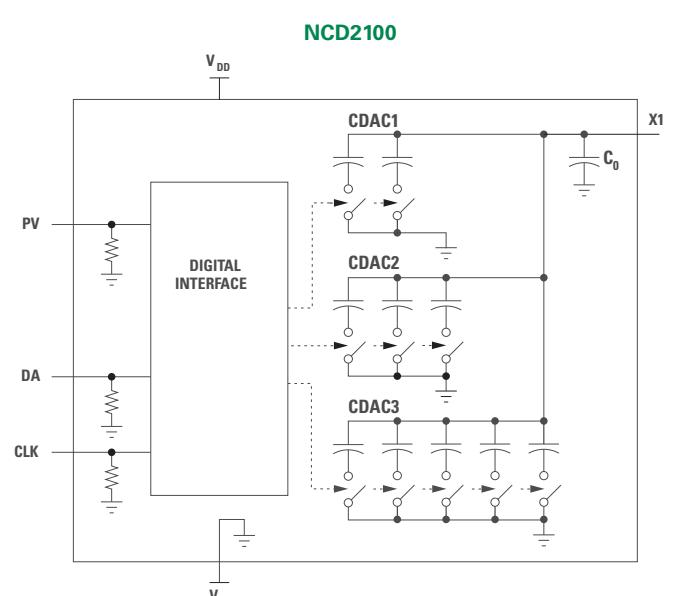

## High Voltage LED Drivers

### CPC9909: High Efficiency, High Brightness Mains-Powered LED Driver


The CPC9909 high-efficiency, high-brightness LED driver is manufactured in a high voltage BCDMOS on SOI process. The wide input operating voltage range from  $8V_{\text{DC}}$  to  $550V_{\text{DC}}$  enables the device to be used in a broad range of high-brightness LED applications. The device features pulse frequency modulation (PFM) with a constant peak-current control scheme. This regulation scheme is inherently stable, allowing the driver to be operated above 50% duty cycle without open loop instability or sub-harmonic oscillations. LED dimming can be implemented by applying a small DC voltage to the LD pin, or by applying a low frequency PWM signal to the PWMD pin.

#### Features & Benefits

- 8V to 550V input voltage range
- Linear or PWM brightness control inputs
- Drives multiple LEDs in series/parallel
- >90% efficiency
- Stable operation at >50% duty cycle
- Regulated LED current
- Resistor-programmable minimum off-time
- Drives external power MOSFET, enabling high LED output current applications
- Buck or boost configuration

#### Applications

- Flat-panel display RGB backlighting
- Signage and decorative LED lighting
- DC/DC or AC/DC LED driver applications

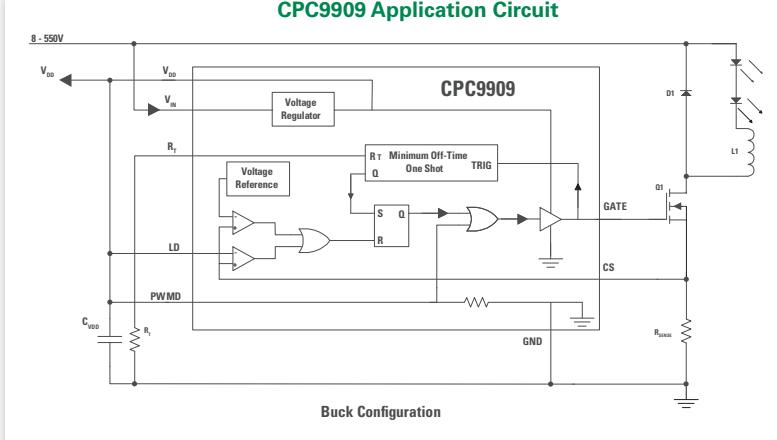

### MXHV9910: High Voltage, Mains-Powered LED Driver


The MXHV9910 high-efficiency, high-brightness LED driver is manufactured in a high voltage BCDMOS on SOI process. The wide input operating voltage range from  $8V_{\text{DC}}$  to  $450V_{\text{DC}}$  enables the device to be used in a broad range of high-brightness LED applications. The MXHV9910 features a fixed-frequency, peak-current control method, which provides an ideal solution for driving multiple LEDs in series and in parallel. LED dimming can be implemented by applying a small DC voltage to the LD pin, or by applying a low frequency PWM signal to the PWMD pin.

#### Features & Benefits

- 8V to 450V input voltage range
- >90% efficiency
- Drives multiple LEDs in series/parallel combinations
- Regulated LED drive current
- Linear or PWM brightness control inputs
- Resistor-programmable oscillator frequency

#### Applications

- Signage, decorative LED lighting
- Flat-panel display RGB backlighting
- DC & AC/DC LED driver applications

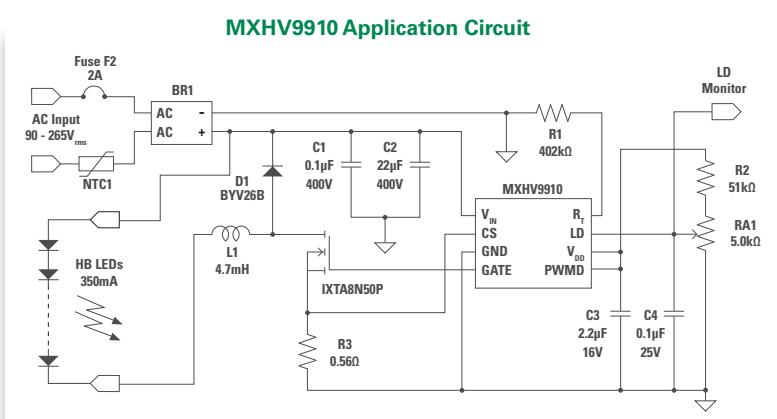

8-Pin SOIC-EP



8-Pin SOIC

Note – Images are to scale

Note – Images are to scale

## Multifunction Products: SSR/Optocouplers


### General Purpose Multifunction Products

The OptoMOS® line of Multifunction Products combines a number of discrete, optically isolated functions into a single package. These products mix and match solid state relays, optocouplers, and Darlington transistors to create highly functional circuits in a single, small package. Multifunction devices allow designers to consolidate circuit functions into a single device, thus freeing up valuable board space and reducing component count.

#### Features & Benefits

- 3750V<sub>RMS</sub> input-to-output isolation
- Multiple functionality in a single package
- Current limiting (part numbers with "L" suffix)
- Telecommunication/datacommunication
- Instrumentation
- I/O subsystems/electronic switching
- Medical equipment (patient/equipment isolation)
- Security

#### Applications

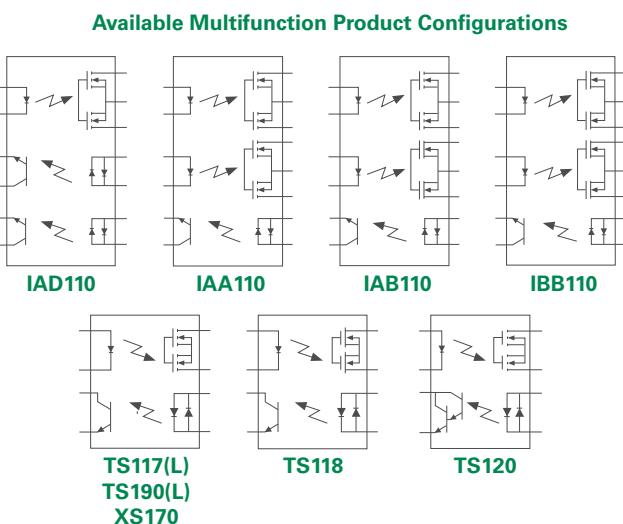


### Telecommunications Multifunction Products

Multifunction devices allow designers to consolidate circuit functions into a single device, freeing up valuable board space and reducing component count. Designed specifically for the telecommunications industry, the Integrated Telecom Circuit (ITC) series is well suited for voice telephony and modem applications, providing most of the major functions required when designing DAA (Data Access Arrangement) or voice (FXO) line interface circuits. Available in a 16-pin SOIC package.

#### Features & Benefits

- 3750V<sub>RMS</sub> input-to-output isolation
- Multiple functionality in a single package
- Current limiting (part numbers with "L" suffix)
- Telecommunication/datacommunication
- Instrumentation
- I/O subsystems
- Electronic switching
- Medical equipment (patient/equipment isolation)
- Security
- Industrial controls

#### Applications

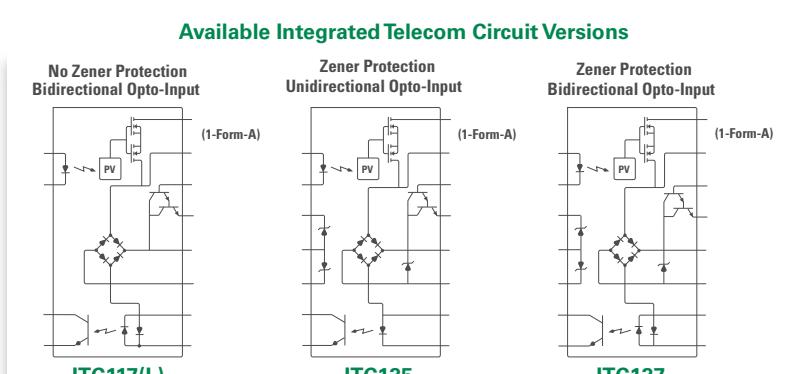

8-Pin  
DIP



8-Pin  
Flatpack



8-Pin  
Surface  
Mount



16-Pin  
SOIC

**Note** – Images are to scale

## Voltage Monitoring & Sensing IC

### CPC5712


The CPC5712 is a special purpose Voltage Monitor with Detectors integrated circuit that is used in various high-voltage telephony applications such as VoIP gateways and IP-PBXs. The device monitors the TIP/RING potential through a high-impedance divider (resistor isolation) to derive two programmable signal level detects, polarity information, and a scaled representation of the phone line voltages. In use, the resistor divider and the high input impedance of the CPC5712 make the circuit practically undetectable on the line.

The CPC5712 can also be used in non-telephony applications including instrumentation and industrial controls. It is virtually undetectable in use.

#### Features & Benefits

- Derives two voltage level detects, polarity information, and a scaled, linear representation of the phone line voltages
- 2 independent, programmable level-detectors with programmable hysteresis
- Fixed-level polarity detector with hysteresis
- Differential linear output
- Common-Mode Rejection Ratio (CMRR) >55dB
- Worldwide telephone network compatibility
- High differential input impedance, very low common-mode input impedance
- Fixed gain, 3V to 5.5V operation
- CMOS logic level output (TTL compatible)

#### Applications

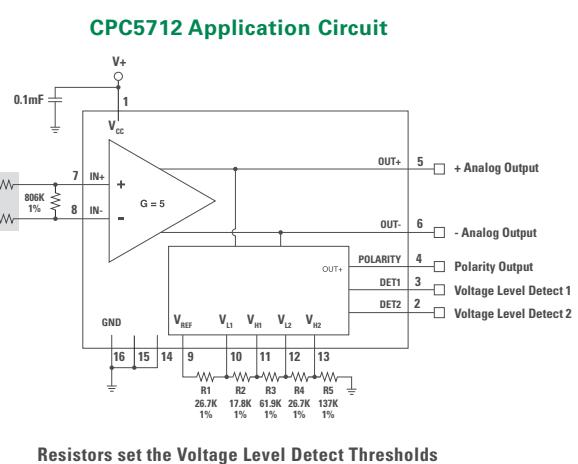

16-Pin  
SOP

### CPC5622-EVAL-600R Evaluation Board

The evaluation board ships with the CPC5622A LITELINK III and CPC5712U Voltage Monitor to demonstrate the functionality of a PSTN terminating two-wire interface that provides both the analog voice transmission and signaling functions. The analog interface is configured to provide a 600 Ohms resistive AC impedance with 0dB gain in both the transmit and receive directions.


While the CPC5622A provides the hook-switch and ringing detect signaling functions, the CPC5712U is utilized to monitor and detect changes in the DC line voltage to determine loop status and signaling information sent by the network. Loop status is given by the logic level outputs of the three CPC5712U on-board detectors indicating Loop Presence, Line In Use, and Loop Polarity.



## Solid State Relays



### 4-Pin SOP

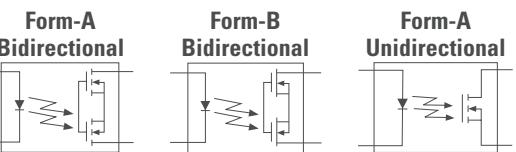


Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
1-Form-A Relays: Single-Pole									
BI		400	120	30	2	2 / 1	1500	1	IEC/EN/UL 62368-1 Supplementary Insulation (0.4mm distance through insulation)
		400	120	30	2	2 / 1	1500	1	-
		350	120	30	2	2 / 1	1500	1	IEC/EN/UL 62368-1 Supplementary Insulation (0.4mm distance through insulation)
		350	120	30	2	2 / 1	1500	1	-
		350	100	35	2	2 / 1	1500	1	-
		250	170	11.5	2	3 / 3	1500	1	-
		100	150	8	2	2 / 1	1500	1	-
		100	150	8	2	2 / 0.5	1500	0.02	Very low off-state I <sub>LEAK</sub> ≤ 20nA
		100	100	16	2	2 / 1	1500	1	-
		60	750	0.6	2	3 / 3	1500	1	-
		60	600	0.8	1	3 / 2	1500	1	-
		60	400	2	2	2 / 1	1500	1	EN 50130-4
		60	100	16	1	10 / 10	1500	1	Low I <sub>F</sub> , EN 50130-4
		60	75	10	0.5	10 / 10	1500	1	Low I <sub>F</sub> , EN 50130-4
		30	1200	0.25	2	3 / 3	1500	1	High load current, very low on-resistance
1-Form-B Relays: Single-Pole									
BI		400	100	35	2	2 / 2	1500	5	-
		350	120	50	2	1 / 2	1500	5	-
		350	120	35	2	2 / 2	1500	5	-
		350	120	30	2	2 / 2	1500	5	IEC/EN/UL 62368-1 Supplementary Insulation (0.4mm distance through insulation)
		350	120	30	2	2 / 2	1500	5	-
		60	400	2	2	2 / 5	1500	1	-
		60	150	16	1	10 / 10	1500	1	Low I <sub>F</sub> , EN 50130-4
		60	75	10	0.5	10 / 10	1500	1	Low I <sub>F</sub> , EN 50130-4
1-Form-A Relays: Single-Pole, Unidirectional (DC-only)									
CPC1004N	UNI	100	300	4	2	3 / 1	1500	1	Extended operating temperature range: -40°C to +110°C
CPC1002N		60	700	0.55	2	5 / 2	1500	1	EN 50130-4

## Motion Detection

### ZMOTIONL400 PIR Motion Detection MCU Development Kit

The ZMOTIONL400 PIR Motion Detection Development Kit provides an excellent platform for evaluating the capabilities of our ZMOTION Family of PIR Sensors, Motion Detection Microcontrollers, and related ZMOTION Engine Software. The ZMOTION Family is ideally suited for most motion detection applications including lighting control, IP cameras and intrusion/security motion detectors in both wired and battery powered products.

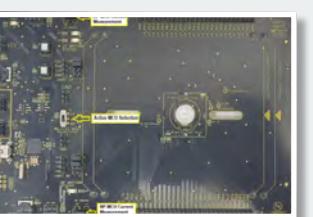


Scan the code to learn more.

## Solid State Relays



### 6-Pin Surface Mount

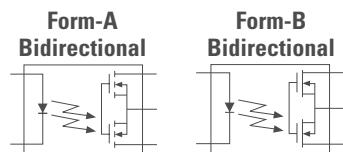

Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments	
1-Form-A Relays: Single-Pole										
BI+		PLA170S	800	100	50	5	5 / 5	3750	1	-
		PLA192S	600	150	22	5	5 / 5	5000	1	Enhanced isolation voltage
		PLA194S	600	130	35	2	3 / 2	5000	1	Enhanced isolation voltage
		CPC1593GS	600	120	35	2	2 / 2	3750	1	-
		CPC1563GS	600	120	35	2	2 / 2	3750	1	-
		PLA193S	600	100	50	5	5 / 5	5000	1	Enhanced isolation voltage
		PLA143S	600	100	50	2	5 / 5	4000	1	Enhanced isolation voltage
		PLA191S	400	250	8	5	3 / 1	5000	1	Enhanced isolation voltage
		PLA140S	400	250	8	5	3 / 1	3750	1	-
		PLA140LS	400	200	13	5	5 / 3	3750	1	Current limiting
		PLA110LS	400	150	25	5	1 / 0.5	3750	1	Current limiting
		PLA190S	400	150	22	5	1 / 0.5	5000	1	Enhanced isolation voltage
		PLA110S	400	150	22	5	1 / 0.5	3750	1	-
		LCA182S	350	120	35	0.25	3 / 3	3750	1	Very low I <sub>F</sub>
		LCA110S	350	120	35	2	3 / 3	3750	1	-
		LCA110LS	350	120	35	2	3 / 3	3750	1	Current limiting
		CPC1540GS	350	120	25	2	2 / 2	3750	1	Current limiting, thermal management, voltage triggered shutdown
		LCA100LS	350	120	25	5	5 / 5	3750	1	Current limiting
		LCA100S	350	120	25	5	5 / 5	3750	1	-
		XCA170S	350	100	50	5	5 / 5	3750	1	-
		LCA125LS	300	170	20	5	5 / 5	3750	1	Current limiting
		LCA125S	300	170	16	5	5 / 5	3750	1	-
		PLA160S	300	50	100	10	0.05 / 0.05	3750	0.025	-
		PLA150S	250	250	7	5	2.5 / 0.5	3750	1	-
		CPC1510GS	250	200	15	2	2 / 2	3750	1	Current limiting with thermal management
		LCA127S	250	200	10	5	5 / 5	3750	1	-
		LCA129S	250	170	20	2	8 / 8	3750	1	-
		LCA120S	250	170	20	5	3 / 3	3750	1	-
		LCA127LS	250	170	15	5	5 / 5	3750	1	Current limiting
		LCA120LS	250	150	20	5	3 / 3	3750	1	Current limiting
		OMA160S	250	50	100	10	0.125 / 0.125	3750	0.025	Low I <sub>LEAK</sub> , fast switching speeds
		LCA701S	100	1500	0.3	2	4 / 1	3750	1	High load current
		PLA134S	100	350	3	5	5 / 5	3750	1	-
		LCA715S	60	2200	0.15	5	2.5 / 0.25	3750	1	High load current
		LCA712S	60	1000	0.5	10	2.5 / 0.35	3750	0.01	High load current, low I <sub>LEAK</sub>
		LCA710S	60	1000	0.5	10	2.5 / 0.25	3750	1	High load current
		PLA132S	60	600	1	2	5 / 2	3750	1	-

## Solid State Relays



### 6-Pin DIP


Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
1-Form-A Relays: Single-Pole									
PLA170	BI+	800	100	50	5	5 / 5	3750	1	-
PLA192		600	150	22	5	5 / 5	5000	1	Enhanced isolation voltage
PLA194		600	130	35	2	3 / 2	5000	1	
CPC1593G		600	120	35	2	2 / 2	3750	1	Current limiting, thermal management, voltage triggered shutdown
CPC1563G		600	120	35	2	2 / 2	3750	1	
PLA143		600	100	50	2	5 / 5	4000	1	Enhanced isolation voltage
PLA193		600	100	50	5	5 / 5	5000	1	
PLA110L		400	150	25	5	1 / 0.5	3750	1	Current limiting
PLA190		400	150	22	5	1 / 0.5	5000	1	Enhanced isolation voltage
PLA110		400	150	22	5	1 / 0.5	3750	1	-
LCA110		350	120	35	2	3 / 3	3750	1	
LCA110L		350	120	35	2	3 / 3	3750	1	Current limiting
CPC1540G		350	120	25	2	2 / 2	3750	1	Current limiting, thermal management, voltage triggered shutdown
LCA182		350	120	35	0.25	3 / 3	3750	1	Very low I <sub>LEAK</sub>
LCA100		350	120	25	5	5 / 5	3750	1	-
LCA100L		350	120	25	5	5 / 5	3750	1	Current limiting
XCA170	BI+	350	100	50	5	5 / 5	3750	1	-
PLA160		300	50	100	10	0.05 / 0.05	3750	0.025	Low I <sub>LEAK</sub> , fast switching speeds
CPC1510G		250	200	15	2	2 / 2	3750	1	Current limiting with thermal management
LCA120L		250	150	20	5	3 / 3	3750	1	Current limiting
OMA160		250	50	100	10	0.125 / 0.125	3750	0.025	Low I <sub>LEAK</sub> , fast switching speeds
1-Form-A Relays: Single-Pole									
PLA191	BI+	400	250	8	5	3 / 1	3750	1	Enhanced isolation voltage
PLA140		400	250	8	5	3 / 1		1	-
PLA140L		400	200	13	5	5 / 3		1	Current limiting
LCA125L		300	170	20	5	5 / 5		1	Current limiting
LCA125		300	170	16	5	5 / 5		1	-
PLA150		250	250	7	5	2.5 / 0.5		1	
LCA127		250	200	10	5	5 / 5		1	-
LCA129		250	170	20	2	8 / 8		1	-
LCA120		250	170	20	5	3 / 3		1	-
LCA127L		250	170	15	5	5 / 5		1	-
LCA701		100	1500	0.3	2	4 / 1		1	High load current
PLA134		100	350	3	5	5 / 5		1	-
LCA715		60	2200	0.15	5	2.5 / 0.25		1	-
LCA712		60	1000	0.5	10	2.5 / 0.35		0.01	High load current, low I <sub>LEAK</sub>
LCA710		60	1000	0.5	10	2.5 / 0.25		1	High load current
PLA132	BI+	60	600	1	2	5 / 2		1	-
LCA717		30	2000	0.15	2	3 / 3		1	-
1-Form-B Relays: Single-Pole									
PLB190	BI+	400	130	25	2	1 / 2.5	5000	1	-
LCB110		350	120	35	5	3 / 3	3750		-
XCB170		350	100	50	5	5 / 5	3750		-
LCB111		350	120	35	2	5 / 5	3750		-
LCB120		250	170	20	5	5 / 5	3750		-
LCB126		250	170	15	5	5 / 5	3750		-
LCB127		250	200	10	5	5 / 5	3750		-
PLB150		250	250	7	5	1 / 2.5	3750		-
LCB716		60	500	2	2	3 / 3	3750		High load current
LCB710		60	1000	0.6	2	3 / 3	3750		High load current
LCB717		30	1500	0.3	2	2 / 5	3750		High load current

## Solid State Relays




### 4-Pin DIP

Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
1-Form-A Relays: Single-Pole									
CPC1394G	BI	600	120	35	2	5 / 3	5000	1	Enhanced isolation voltage
CPC1393G		600	90	50					
CPC1390G		400	140	22					
CPC1330G		350	120	30					
1-Form-B Relays: Single-Pole									
CPC1333G	BI	350	130	30	2	2 / 3	5000	1	Enhanced isolation voltage

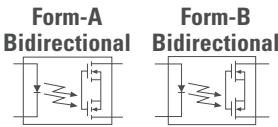

### 4-Pin Surface Mount


Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
1-Form-A Relays: Single-Pole									
CPC1394GR	BI	600	120	35	2	5 / 3	5000	1	Enhanced isolation voltage
CPC1393GR		600	90	50					
CPC1390GR		400	140	22					
CPC1330GR		350	120	30					
1-Form-B Relays: Single-Pole									
CPC1333GR	BI	350	130	30	2	2 / 3	5000	1	Enhanced isolation voltage



## Solid State Relays



### 8-Pin Flatpack

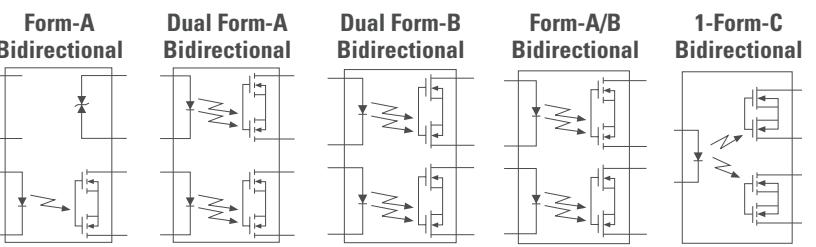


Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
<b>1-Form-A Relays: Single-Pole</b>									
CPC1335P	BI	350	100	35	1	10 / 10	3750	1	Low I <sub>F</sub> , EN 50130-4 (installation class 3), transient voltage suppression (TVS)
<b>1-Form-A Relays: Dual Single-Pole</b>									
PAA140P	BI	400	250	8	5	3 / 1	3750	1	Low I <sub>F</sub> , EN 50130-4 (installation class 3), transient voltage suppression (TVS)
PAA110PL		400	150	25	5	1 / 0.5		1	
PAA110P		400	150	22	5	1 / 0.25		1	
LAA125P		350	170	16	5	5 / 5		1	
LAA125PL		350	150	18	5	5 / 5		1	
LAA110P		350	120	35	5	3 / 3		1	
LAA110PL		350	120	35	5	3 / 3		1	
LAA100PL		350	120	25	5	5 / 5		1	
LAA100P		350	120	25	5	5 / 5		1	
XAA170P		350	100	50	5	5 / 5		1	
PAA127P		280	200	10	3	0.5 / 0.5		0.025	
LAA120PL		250	150	25	5	5 / 5		1	
OOA160P		250	50	100	6	0.125 / 0.125		0.025	
LAA120P		250	170	20	5	5 / 5		1	
LAA127PL		250	170	10	5	5 / 5		1	
LAA127P		250	200	10	5	5 / 5		1	
PAA150P		250	250	7	5	2.5 / 0.5		1	
LAA108P		100	300	8	2	3 / 3		1	
XAA117P		60	150	16	1	5 / 5		1	
<b>1-Form-B Relays: Dual Single-Pole</b>									
LBB110P	BI	350	120	35	5	3 / 3	3750	1	Low I <sub>F</sub>
XBB170P		350	100	50		5 / 5			
PBB150P		250	250	7		2.5 / 2.5			
LBB127P		250	200	10		5 / 5			
LBB126P		250	170	15		5 / 5			
LBB120P		250	170	20		5 / 5			
<b>1-Form-A &amp; 1-Form B Combination Relays</b>									
LBA110P	BI	350	120	35	2	3 / 3	3750	1 / 1	Current limiting
LBA110PL		350	120	35	5	3 / 3			
LBA127P		250	200	10	5	5 / 5			
LBA120P		250	170	20	5	5 / 5			
<b>1-Form-C Relays: Common Input, Single-Pole, Double-Throw</b>									
LCC110P	BI	350	120	35	8	4 / 4	3750	1	-

## Solid State Relays



### 8-Pin DIP

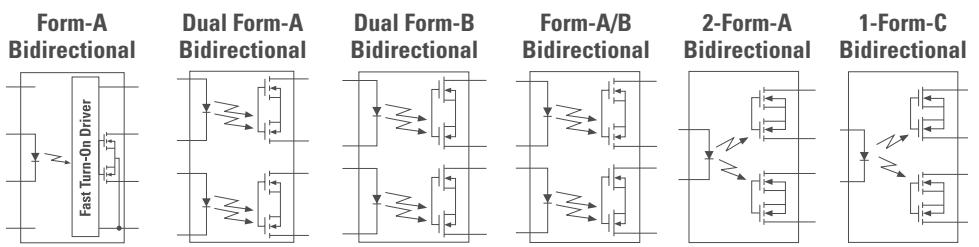


Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
<b>1-Form-A Relays: Single-Pole</b>									
CPC1560	BI+	60	300	5.6	1.1	0.1 / 0.4	3750	1	Current limiting with thermal management
<b>1-Form-A Relays: Dual Single-Pole</b>									
PAA193	BI	600	100	50	5	5 / 5	5000	10	Enhanced isolation voltage
PAA191		400	250	8	5	3 / 1	5000	1	Enhanced isolation voltage
PAA140		400	250	8	5	3 / 1	3750	1	-
PAA140L		400	200	13	5	5 / 3	3750	1	Current limiting
PAA110L		400	150	25	5	1 / 0.5	3750	1	Current limiting
PAA190		400	150	22	5	1 / 0.5	5000	1	Enhanced isolation voltage
PAA110		400	150	22	5	1 / 0.25	3750	1	-
LAA125		350	170	16	5	5 / 5	3750	1	-
LAA125L		350	150	18	5	5 / 5	3750	1	Current limiting
LAA110L		350	120	35	5	3 / 3	3750	1	Current limiting
LAA110		350	120	35	5	3 / 3	3750	1	-
LAA100		350	120	25	5	5 / 5	3750	1	-
LAA100L		350	120	25	5	5 / 5	3750	1	Current limiting
XAA170		350	100	50	5	5 / 5	3750	1	-
PAA127		280	200	10	3	0.5 / 0.5	3750	0.025	Very low I <sub>LEAK</sub> , fast switching speeds
PAA150		250	250	7	5	2.5 / 0.5	3750	1	-
LAA127		250	200	10	5	5 / 5	3750	1	-
LAA120		250	170	20	5	5 / 5	3750	1	-
LAA127L		250	170	10	5	5 / 5	3750	1	Current limiting
LAA120L		250	150	25	5	5 / 5	3750	1	Current limiting
OAA160	BI	250	50	100	6	0.125 / 0.125	3750	0.025	Very low I <sub>LEAK</sub> , fast switching speeds
LAA108		100	300	8	2	3 / 3	3750	1	-
LAA710		60	1000	0.5	10	2.5 / 0.25	3750	1	-
PAA132		60	600	1	2	5 / 2	3750	1	-
XAA117		60	150	16	1	5 / 5	3750	1	Low I <sub>F</sub>
<b>1-Form-B Relays: Dual Single-Pole</b>									
PBB190	BI	400	130	25	2	1 / 2.5	5000	1	-
XBB170		350	100	50	5	5 / 5	3750		
LBB110		350	120	35	5	3 / 3	3750		
PBB150		250	250	7	5	2.5 / 2.5	3750		
LBB127		250	200	10	5	5 / 5	3750		
LBB120		250	170	20	5	5 / 5	3750		
LBB126									

## Solid State Relays

### 8-Pin DIP (continued)

Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
<b>1-Form-A &amp; 1-Form B Combination Relays</b>									
LBA110	BI	350	120	35	2	3 / 3	3750	1 / 1	-
LBA110L		350	120	35	5	3 / 3			-
PBA150		250	250	7	5	2.5 / 2.5			-
LBA127		250	200	10	5	5 / 5			-
LBA120		250	170	20	5	5 / 5			-
LBA120L		250	150	25	5	5 / 5			-
LBA127L		250	150	15	5	5 / 5			-
LBA710		60	1000	0.6	2	5 / 5			High load current
LBA716		60	1000	0.4	2	5 / 5			High load current (Normally closed pole load current = 500mA)
<b>2-Form-A Relays: Double-Pole, Single-Throw</b>									
LCA210	BI	350	85	35	8	3 / 3	3750	1	-
LCA210L		350	85	35	8	4 / 4			Current limiting
LCA220		250	120	20	10	5 / 5			-
<b>1-Form-C Relays: Common Input, Single-Pole, Double-Throw</b>									
LCC110	BI	350	120	35	8	4 / 4	3750	1	-
LCC120		250	170	20	10	5 / 5			-

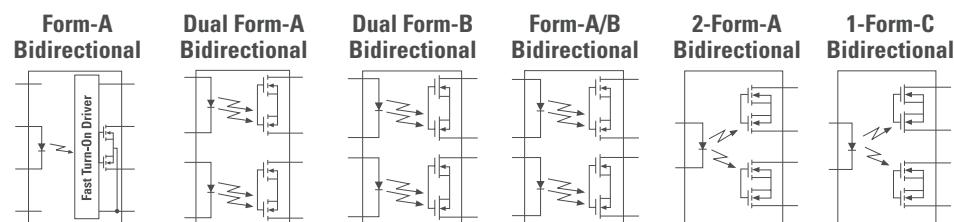

## 8-Pin Surface Mount

Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments			
<b>1-Form-A Relays: Single-Pole</b>												
CPC1560S	BI+	60	300	5.6	1.1	0.1 / 0.4	3750	1	Current limiting with thermal management			
<b>1-Form-A Relays: Dual Single-Pole</b>												
PAA193S		600	100	50	5	5 / 5			Enhanced isolation voltage			
PAA191S		400	250	8	5	3 / 1			Enhanced isolation voltage			
PAA140S		400	250	8	5	3 / 1			-			
PAA140LS		400	200	13	5	5 / 3			Current limiting			
PAA110LS		400	150	25	5	1 / 0.5			Current limiting			
PAA190S		400	150	22	5	1 / 0.5			Enhanced isolation voltage			
PAA110S		400	150	22	5	1 / 0.25			-			
LAA125S		350	170	16	5	5 / 5			-			
LAA125LS	BI	350	150	18	5	5 / 5	3750	1	Current limiting			
LAA110LS		350	120	35	5	3 / 3			Current limiting			
LAA110S		350	120	35	5	3 / 3			-			
LAA100LS		350	120	25	5	5 / 5			Current limiting			
LAA100S		350	120	25	5	5 / 5			-			
XAA170S		350	100	50	5	5 / 5			-			
PAA127S		280	200	10	3	0.5 / 0.5			Very low I <sub>LEAK</sub> , fast switching speeds			
PAA150S		250	250	7	5	2.5 / 0.5			-			
LAA127S		250	200	10	5	5 / 5			-			

Continued on page 29

## Solid State Relays


### 8-Pin Surface Mount (continued)

<b>1-Form-A Relays: Dual Single-Pole</b>									
LAA120S	BI	250	170	20	5	5 / 5	3750	1	-
LAA127LS		250	170	10	5	5 / 5			Current limiting
LAA120LS		250	150	25	5	5 / 5			Current limiting
OAA160S		250	50	100	6	0.125 / 0.125			0.025
LAA108S		100	300	8	2	3 / 3			Very low I <sub>LEAK</sub> , fast switching speeds
LAA710S		60	1000	0.5	10	2.5 / 0.25			-
PAA132S		60	600	1	2	5 / 2			-
XAA117S		60	150	16	1	5 / 5			Low I <sub>F</sub>
<b>1-Form-B Relays: Dual Single-Pole</b>									
PBB190S	BI	400	130	25	2	1 / 2.5	5000	1	-
LBB110S		350	120	35	5	3 / 3			-
XBB170S		350	100	50	5	5 / 5			-
PBB150S		250	250	7	5	2.5 / 2.5			-
LBB127S		250	200	10	5	5 / 5			-
LBB120S		250	170	20	5	5 / 5			-
LBB126S		250	170	15	5	5 / 5			-
<b>1-Form-A &amp; 1-Form B Combination Relays</b>									
LBA110LS	BI	350	120	35	5	3 / 3	3750	1 / 1	-
LBA110S		350	120	35	2	3 / 3			-
PBA150S		250	250	7	5	2.5 / 2.5			-
LBA127S		250	200	10	5	5 / 5			-
LBA120S		250	150	25	5	5 / 5			-
LBA127LS		250	150	15	5	5 / 5			-
LBA716S		60	1000	0.4	2	5 / 5			High load current (Normally closed pole load current = 500mA)
LBA710S		60	1000	0.6	2	5 / 5			High load current
<b>2-Form-A Relays: Double-Pole, Single-Throw</b>									
LCA210S	BI	350	85						

## Solid State Relays




### Power SIP

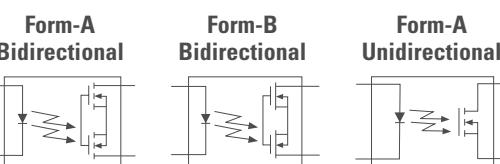


Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
<b>1-Form-A Relays: Single-Pole</b>									
CPC1981Y	BI	1000	180	18	10	10 / 5	2500		
CPC1984Y	BI	600	1000	0.66	5	10 / 2	4000		
CPC1983YE	BI	600	500	6	5	5 / 2	4000		
CPC1983Y	BI	600	500	6	5	5 / 2	2500		
CPC1973Y	BI	400	350	5	10	5 / 3	2500		
CPC1726Y	UNI	250	1000	0.75	10	5 / 2	2500		
CPC1926Y	BI	250	700	1.4	10	10 / 10	2500		
CPC1511Y	BI	230	450	4	2.5	4 / 2	3750		
CPC1916Y	BI	100	2500	0.34	10	5 / 3	2500		
CPC1706Y	UNI	60	4000	0.09	5	5 / 2	2500		
CPC1906Y	BI	60	2000	0.3	10	10 / 5	2500		
<b>1-Form-B Relays: Single-Pole</b>									
CPC1705Y	UNI	60	3250	0.09	5	2 / 12	2500	1	-

### Power SOIC

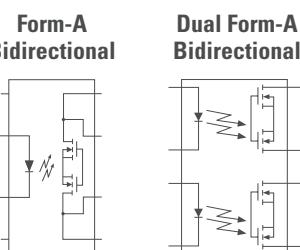

Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
<b>1-Form-A Relays: Single-Pole</b>									
CPC1983B	BI	600	500	6	5	5 / 2	5000	1	-
CPC1907B		60	6000	0.06		5 / 1			
<b>1-Form-A Relays: Dual Single-Pole</b>									
CPC2907B	BI	60	2000	0.15	5	2.5 / 0.25	4000	1	DUAL: two independent relays in one package

### 16-Pin SOIC




Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)	Features & Comments
<b>1-Form-A Relays: Single-Pole</b>									
CPC1561B	BI	60	1000	0.245	2.5	2.5 / 0.5	3750	1	Current limiting with thermal management

## Fault Protected Solid State Relays



### 6-Pin Surface Mount




Part Number	Blocking Voltage (V <sub>p</sub> )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		* VTS Threshold V <sub>TH</sub> (V)	Switching Speed t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
			DC-Only (Ω)	AC (Ω)	DC-Only (mA)	AC (mA)	DC-Only (mA <sub>p</sub> )	AC (mA <sub>p</sub> )				
<b>Active Current Limiting SSRs with Voltage Triggered Shutdown &amp; Thermal Management</b>												
CPC1593GS	600		11.75	35	250	120	570	285	21			Power supply start-up
CPC1563GS	600		11.75	35	250	120	570	285	100			High blocking voltage
CPC1540GS	350		6.75	25	250	120	570	285	100			PSTN hook switch applications
CPC1510GS	250		3.75	15	350	200	920	450	-			Industrial applications

\* Load current is reduced to approximately 100μA or less whenever the voltage across the switches exceeds the threshold V<sub>TH</sub> while the relay is in current limit



### 6-Pin DIP




Part Number	Blocking Voltage (V <sub>p</sub> )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		* VTS Threshold V <sub>TH</sub> (V)	Switching Speed t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
			DC-Only (Ω)	AC (Ω)	DC-Only (mA)	AC (mA)	DC-Only (mA <sub>p</sub> )	AC (mA <sub>p</sub> )				
<b>Active Current Limiting SSRs with Voltage Triggered Shutdown &amp; Thermal Management</b>												
CPC1563G	600		11.75	35	250	120	570	285	100			High blocking voltage
CPC1593G	600		11.75	35	250	120	570	285	21			Power supply start-up
CPC1540G	350		6.75	25	250	120	570	285	100			PSTN hook switch applications
CPC1510G	250		3.75	15	350	200	920	450	-			Industrial applications

\* Load current is reduced to approximately 100μA or less whenever the voltage across the switches exceeds the threshold V<sub>TH</sub> while the relay is in current limit



### 8-Pin DIP

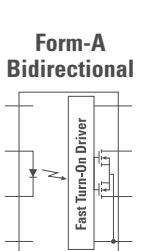

Part Number	Blocking Voltage (V <sub>p</sub> )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		Switching Speed t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
			DC-Only (Ω)	AC (Ω)	DC-Only (mA)	AC (mA)	DC-Only (mA <sub>p</sub> )	AC (mA <sub>p</sub> )			
<b>Active Current Limit</b>											


## Fault Protected Solid State Relays



### 8-Pin Surface Mount

Part Number	Blocking Voltage (V <sub>p</sub> )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		Switching Speed t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
			DC-Only (Ω)	AC (Ω)	DC-Only (mA)	AC (mA)	DC-Only (mA <sub>p</sub> )	AC (mA <sub>p</sub> )			
Active Current Limiting SSRs with Voltage Triggered Shutdown & Thermal Management											
CPC1560GS	60	1.1	1.4	5.6	600	300	1500	900	0.1 / 0.4	3750	Fast switching speeds


### Form-A Bidirectional



### 16-Pin SOIC

Part Number	Blocking Voltage (V <sub>p</sub> )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		Switching Speed t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
			DC-Only (Ω)	AC (Ω)	DC-Only (mA)	AC (mA)	DC-Only (mA <sub>p</sub> )	AC (mA <sub>p</sub> )			
Active Current Limiting SSRs with Voltage Triggered Shutdown & Thermal Management											
CPC1561B	60	2.5	-	0.245	-	1000	-	3000	2.5 / 0.5	3750	1A Load current rating to 60°C


### Form-A Bidirectional



### Power SIP

Part Number	Blocking Voltage (V <sub>p</sub> )	Input Control Current (mA)	On-Resistance (Maximum)		Load Current (Maximum)		Current Limit (Maximum)		Switching Speed t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
			DC-Only (Ω)	AC (Ω)	DC-Only (mA)	AC (mA)	DC-Only (mA <sub>p</sub> )	AC (mA <sub>p</sub> )			
Active Current Limiting SSRs with Voltage Triggered Shutdown & Thermal Management											
CPC1511Y	230	2.5	-	4	-	450	-	1400	4 / 2	3750	Industrial applications


### Form-A Bidirectional



## Optically Isolated Power Relays




### i4-PAC

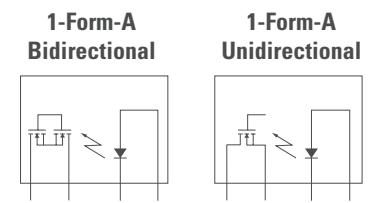

Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )			On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)
			Without Heat Sink	5°C/W Heat Sink	T <sub>c</sub> =25°C					
1-Form-A Power Relays: Single-Pole - Bidirectional										
CPC1986J	BI	1000	0.65	1.6	6.5	3	10	20 / 5	2500	1
CPC1978J		800	0.75	1.85	7.25	2.3				
CPC1977J		600	1.25	3.1	12.25	1				
CPC1967J		400	1.35	3.35	13.15	0.85				
CPC1908J		60	3.5	8.5	15	0.3				
Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (A)			On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)
			Without Heat Sink	5°C/W Heat Sink	T <sub>c</sub> =25°C					
1-Form-A Power Relays: Single-Pole - Unidirectional										
CPC1786J	UNI	1000	0.65	1.75	6.9	2	10	20 / 5	2500	1
CPC1777J		600	1.5	4.6	15	0.5				
CPC1708J		60	4	11.85	24	0.08				



### ISOPLUS-264

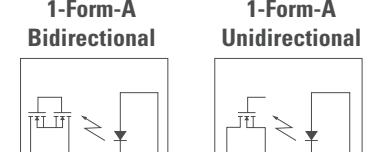


Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )			On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)
			Without Heat Sink	5°C/W Heat Sink	T <sub>c</sub> =25°C					
1-Form-A Power Relays: Single-Pole - Bidirectional										
CPC1988J	BI	1000	0.9	2.25	9.4	2.5	10	25 / 10	2500	1
CPC1979J		600	1.4	3.5	14.5	0.75				
CPC1968J		500	2	5	15	0.35				
CPC1927J		250	2.7	6.7	15	0.2				
CPC1918J		100	5.25	13	15	0.1				
CPC1909J		60	6.5	15	15	0.1				
Part Number	Relay Type	Blocking Voltage (V <sub>p</sub> )	Load Current (A)			On Resistance (Ω)	Input Control Current (mA)	Switching Speeds t <sub>on</sub> / t <sub>off</sub> (ms)	Isolation Voltage (V <sub>RMS</sub> )	Off-State Leakage (μA)


## Optically Isolated AC Power Switches




### 4-Pin DIP (16-pin Body)




Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Turn-On: Zero-Cross or Rapid	Operating Frequency Range (Hz)	Isolation Voltage (V <sub>RMS</sub> )
Optically Isolated AC Power Switches						
PD2601	600				20 - 500	
CPC1965G	600				20 - 400	
PD2401	500			Zero-cross	20 - 500	3750
CPC1945G	400				20 - 400	
PD1201	400				20 - 500	



Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Turn-On: Zero-Cross or Rapid	Operating Frequency Range (Hz)	Isolation Voltage (V <sub>RMS</sub> )
Optically Isolated AC Power Switches						
CPC1972GS	800	0.25	5	Zero-cross	20 - 500	3750



Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Turn-On: Zero-Cross or Rapid	Operating Frequency Range (Hz)	Isolation Voltage (V <sub>RMS</sub> )
Optically Isolated AC Power Switches						
CPC1972G	800	0.25	5	Zero-cross	20 - 500	3750




Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Turn-On: Zero-Cross or Rapid	Operating Frequency Range (Hz)	Isolation Voltage (V <sub>RMS</sub> )
Optically Isolated AC Power Switches						
PM1206	600					
CPC1963G	600					
PM1205	500	0.5		Zero-cross	20 - 500	3750
CPC1943G	400					
PM1204	400					

## Optically Isolated AC Power Switches




### 6-Pin Power DIP Surface Mount



Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Turn-On: Zero-Cross or Rapid	Operating Frequency Range (Hz)	Isolation Voltage (V <sub>RMS</sub> )
Optically Isolated AC Power Switches						
CPC1963GS	600					
PM1206S	600					
PM1205S	500	0.5		Zero-Cross	20 - 500	3750
CPC1943GS	400					
PM1204S	400					



### 8-Pin DIP




Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Turn-On: Zero-Cross or Rapid	Operating Frequency Range (Hz)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
Optically Isolated AC Power Switches							
CPC1961G	600	0.25 <sup>1</sup>	5	Zero-Cross	20 - 500	3750	Dual AC power switch

<sup>1</sup> Maximum continuous load current of a single pole or the sum of the load currents with both poles operating simultaneously



### 8-Pin Surface Mount



Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Turn-On: Zero-Cross or Rapid	Operating Frequency Range (Hz)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
Optically Isolated AC Power Switches							
CPC1961GS	600	0.25 <sup>1</sup>	5	Zero-Cross	20 - 500	3750	Dual AC power switch

<sup>1</sup> Maximum continuous load current of a single pole or the sum of the load currents with both poles operating simultaneously

## How is the Optically Isolated AC Power Switch Used Here?

### Gas Pump

Gas and fuel pump motors need to be switched by galvanically isolated semiconductor switches to avoid the potential risk of ignition of these flammable substances by contact arcing if compared to any mechanical relays or switches. Solid state relays do not feature any mechanical contacts or other mechanical components, thus there is no contact arcing.




## Optically Isolated AC Power Switches




**4-Pin SIP**  
(8-Pin Body)

Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Operating Frequency Range (Hz)	Turn On: Zero-Cross or Rapid	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
Optically Isolated AC Power Switches							
PS2601	600	1	5	20 - 500	Zero-cross	3750	-
CPC1965Y	600			20 - 400			-
PS2401	500			20 - 500			-
CPC1945Y	400			20 - 400			-
PS1201	400			20 - 500			-




**i4-PAC**

Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current			Input Control Current (mA)	Operating Frequency Range (Hz)	Turn-On: Zero-Cross or Rapid	Switching Speed t <sub>on</sub> / t <sub>off</sub> (max)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
		Without Heat Sink (A <sub>RMS</sub> )	5°C/W Heat Sink (A <sub>RMS</sub> )	T <sub>C</sub> =25°C (A <sub>RMS</sub> )						
Optically Isolated AC Power Switches										
CPC1998J	800	5	20	50	5	20 - 500	Zero-cross	1/2 Cycle	2500	High load current



**Power SIP**

Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Operating Frequency Range (Hz)	Turn-On: Zero-Cross or Rapid	Switching Speed t <sub>on</sub> / t <sub>off</sub> (max)	Isolation Voltage (V <sub>RMS</sub> )
Optically Isolated AC Power Switches							
CPC1966YX8	800	5	20 - 500	3750	Rapid	45μs <sup>1</sup> / 1/2 Cycle	3750
CPC1966Y	600				Zero-cross	1/2 Cycle	
CPC1976Y	600				Zero-cross	1/2 Cycle	
CPC1976YX6	600				Rapid	500μs / 1/2 Cycle	
CPC1966YX6	600				Rapid	500μs / 1/2 Cycle	

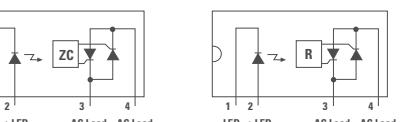


### Notes

1. Typical turn-on values

## Optically Isolated AC Power Switches



**SuperSIP**



Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current			Input Control Current (mA)	Operating Frequency Range (Hz)	Turn-On: Zero-Cross or Rapid	Switching Speed t <sub>on</sub> / t <sub>off</sub> (max)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
		Without Heat Sink (A <sub>RMS</sub> )	5°C/W Heat Sink (A <sub>RMS</sub> )	T <sub>C</sub> =25°C (A <sub>RMS</sub> )						
Optically Isolated AC Power Switches										
CPC40055ST	800	5	20	40	5	20 - 500	Zero-cross	1/2 Cycle	2500	High load current, 8.788mm creepage



Part Number	Blocking Voltage (V <sub>p</sub> )	Load Current (A <sub>RMS</sub> )	Input Control Current (mA)	Operating Frequency Range (Hz)	Turn-On: Zero-Cross or Rapid	Switching Speed t <sub>on</sub> / t <sub>off</sub> (max)	Isolation Voltage (V <sub>RMS</sub> )	Features & Comments	
CPC1966B	800	3	5	20 - 500	Zero-cross	1/2 Cycle	5000	Enhanced isolation voltage, 12.5mm creepage	
					Rapid	45μs <sup>1</sup> / 1/2 Cycle			
					Zero-cross	1/2 Cycle			
					Rapid	500μs / 1/2 Cycle			

### Notes

1. Typical turn-on values

## How is the OptoMOS® AC Power Switch Used Here?

### Smart Home

OptoMOS® AC Power Switches are ideal for switching smaller loads in all kind of applications including home automation or smart home. The input and output circuits are optically coupled to provide up to 5000V<sub>RMS</sub> of galvanic isolation and noise immunity between control and load circuits. The product line includes devices with blocking voltages of up to 800V<sub>AC</sub> peak.

Long life and environmental integrity make these power switches ideal for controlling a variety of AC load circuits.




## IGBT & MOSFET Low-Side Gate Drivers



### 8-Pin (3 x 3)mm DFN

Part Number	Output Type	$I_{PEAK}$ $T_c=25^\circ\text{C}$ ( $\text{A}_p$ )	Output Resistance ( $\Omega$ )	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IX4426M	DUAL	1.5	8	I	-	-
IX4427M				N	-	-
IX4428M				F	-	-


#### Logic Configurations

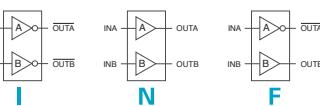

### 8-Pin (5 x 4)mm DFN

Part Number	Output Type	$I_{PEAK}$ $T_c=25^\circ\text{C}$ ( $\text{A}_p$ )	Output Resistance ( $\Omega$ )	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IXD_602D2	DUAL	2	4	I, N, F	-	-
IXD_604D2	DUAL	4	2.5	D, I, N, F	•	-
IXD_609D2	SINGLE	9	1	D, I, N	•	-


#### Logic Configurations

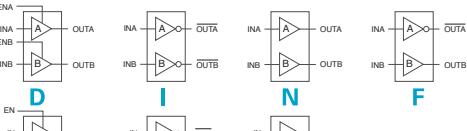

### 8-Pin SOIC

Part Number	Output Type	$I_{PEAK}$ $T_c=25^\circ\text{C}$ ( $\text{A}_p$ )	Output Resistance ( $\Omega$ )	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IX4426N	DUAL	1.5	8	I	-	-
IX4427N	DUAL	1.5	8	N	-	-
IX4428N	DUAL	1.5	8	F	-	-
IXD_602SIA	DUAL	2	4	I, N, F	-	-
IXD_604SIA	DUAL	4	2.5	D, I, N, F	•	-
IX4340N	DUAL	5	1.5	D	•	3.8
IXD_609SIA	SINGLE	9	1	D, I, N	•	-
AEC-Q100 Qualified Low-Side Gate Drivers						
IXD_604SIA	DUAL	4	2.5	D, I, N, F	•	-

#### Logic Configurations

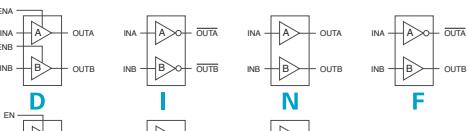


## IGBT & MOSFET Low-Side Gate Drivers



### 8-Pin SOIC (With Exposed Heat Sink Pad)

Part Number	Output Type	$I_{PEAK}$ $T_c=25^\circ\text{C}$ ( $\text{A}_p$ )	Output Resistance ( $\Omega$ )	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IXD_602SI	DUAL	2	4	I, N, F	-	-
IXD_604SI	DUAL	4	2.5	D, I, N, F	•	-
IX4340NE	DUAL	5	1.5	D	•	3.8
IXD_609SI	SINGLE	9	1	D, I, N	•	-
IXD_614SI	SINGLE	14	0.8	D, I, N	•	-
AEC-Q100 Qualified Low-Side Gate Drivers						
IX4340NE	DUAL	5	1.5	D	•	3.8
IXD_604SI	DUAL	4	2.5	D, I, N, F	•	-
IXD_609SI	SINGLE	9	1	D, I, N	•	-
IXD_614SI	SINGLE	14	0.8	D, I, N	•	-


#### Logic Configurations

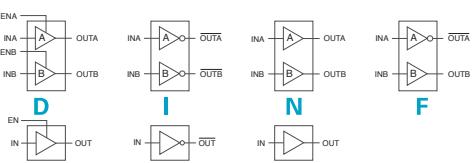

### 8-Pin DIP

Part Number	Output Type	$I_{PEAK}$ $T_c=25^\circ\text{C}$ ( $\text{A}_p$ )	Output Resistance ( $\Omega$ )	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IXD_602PI	DUAL	2	4	I, N, F	-	-
IXD_604PI	DUAL	4	2.5	D, I, N, F	•	-
IXD_609PI	SINGLE	9	1	I, N, F	•	-
IXD_614PI	SINGLE	14	0.8	I, N, F	•	-

#### Logic Configuration

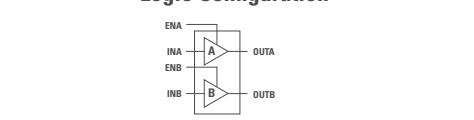

### 8-Pin MSOP (With Exposed Heat Sink Pad)

Part Number	Output Type	$I_{PEAK}$ $T_c=25^\circ\text{C}$ ( $\text{A}_p$ )	Output Resistance ( $\Omega$ )	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IX4340UE	DUAL	5	1.5	D	•	3.8


## IGBT & MOSFET Low-Side Gate Drivers



### 5-Pin SOT23

Part Number	Output Type	$I_{PEAK}^{T_c=25^\circ C}$ (A <sub>p</sub> )	Output Resistance (Ω)	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IX4310T	SINGLE	2	3	N	-	4.2

#### Logic Configuration



### 5-Pin TO-220

Part Number	Output Type	$I_{PEAK}^{T_c=25^\circ C}$ (A <sub>p</sub> )	Output Resistance (Ω)	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IXD_609CI	SINGLE	9	1	D, I, N	•	-
IXD_614CI	SINGLE	14	0.8	D, I, N	•	-
IXD_630CI	SINGLE	30	0.4	D, I, N	•	12.5
IXD_630MCI	SINGLE	30	0.4	D, I, N	•	9


#### Logic Configurations



### 5-Pin TO-263

Part Number	Output Type	$I_{PEAK}^{T_c=25^\circ C}$ (A <sub>p</sub> )	Output Resistance (Ω)	Available Logic Configurations	Enable Function	Under-voltage Lockout (V)
Low-Side Gate Drivers						
IXD_609YI	SINGLE	9	1	D, I, N	•	-
IXD_614YI	SINGLE	14	0.8	D, I, N	•	-
IXD_630YI	SINGLE	30	0.4	D, I, N	•	12.5
IXD_630MYI	SINGLE	30	0.4	D, I, N	•	9

#### Logic Configurations



## SiC MOSFET & IGBT Low-Side Gate Drivers




### 16-Pin Narrow SOIC (With Exposed Heat Sink Pad)

Part Number	Drive Current (A <sub>PEAK</sub> )	Output Resistance Source/Sink (Ω)	Logic Configurations	Enable Function	Under Voltage Lockout Maximum (V)	Internal Charge Pump Generates Selectable Negative Drive Voltage	Internal Logic Level Shifter	Separate Sink and Source Output Pins	Desaturation with Soft Shutdown	Thermal Shutdown	Open-Drain Fault Output
Low-Side Driver With Charge Pump											
IX4351NE	9	2	Non-Inverting	No	10	•	•	•	•	•	•
IX4351NEAU	9	2	Non-Inverting	No	10	•	•	•	•	•	•

## IX4351 Evaluation Board

IXYS Integrated Circuits Division's IX4351 Evaluation Board contains all the necessary circuitry to demonstrate the features of a high power SiC MOSFET gate driver and SiC MOSFET. The board includes an LSIC1MO120E0080 1200V SiC MOSFET from Littelfuse with an  $R_{DS(on)}$  of 80mΩ typical and an  $I_D$  of 25A. The board has an optically isolated interface for the input drive and FAULT output indication pin.

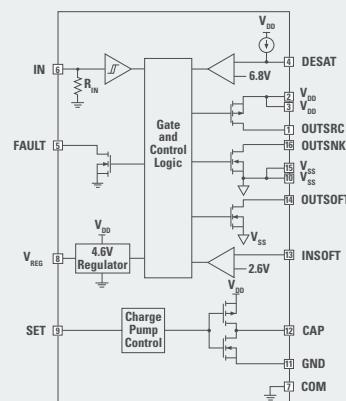

## How is the Gate Driver Used Here?

### Off-board EV Charger

High speed Gate Driver ICs are efficiently driving Power-MOSFET or IGBT devices. The gate drivers convert the controller's PWM signals into gate-signals compatible to Si-/SiC-MOSFETs or IGBTs, providing an optimal power semiconductor control while minimizing power losses. Built-in protection features protect both, the gate driver as well as the power semiconductors.

Typical applications are all kind of chargers and power inverters including on-board and off-board chargers for electrical vehicles as shown in the illustration as one example out of many.




## IGBT & MOSFET High-Speed Gate Drivers



### 8-Pin SOIC

Part Number	Max. Offset Voltage	Typ. Sink / Source Peak Drive Current	Inputs	Deadtime	Propagation Delay $t_{on} / t_{off}$	Rise / Fall Time $t_r / t_f$
High-Side and Low-Side Gate Drivers						
LF2101NTR	600V	600mA / 290mA	HIN / LIN	None	160ns / 150ns	70ns / 35ns
LF2106NTR		290mA / 600mA			220ns / 200ns	100ns / 35ns
LF2181NTR		2.3A / 1.9A			180ns / 220ns	40ns / 20ns
LF2190NTR		4.5A / 4.5A			140ns / 140ns	25ns / 20ns

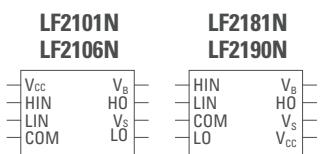


## IGBT & MOSFET High-Speed Gate Drivers




### 8-Pin SOIC

Part Number	Max. Offset Voltage	Typ. Sink / Source Peak Drive Current	Inputs	Deadtime	Propagation Delay $t_{on} / t_{off}$	Rise / Fall Time $t_r / t_f$
Half-Bridge Gate Drivers						
LF2103NTR	600V	600mA / 290mA	HIN / LIN*	520ns	680ns / 150ns	70ns / 35ns
LF2104NTR		600mA / 290mA	IN / SD*	520ns	680ns / 150ns	70ns / 35ns
LF2304NTR		600mA / 290mA	HIN / LIN	100ns	150ns / 150ns	70ns / 35ns
LF2184NTR		2.3A / 1.9A	IN / SD*	400ns	680ns / 270ns	40ns / 20ns

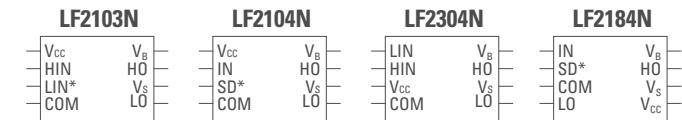



### 14-Pin SOIC

Part Number	Max. Offset Voltage	Typ. Sink / Source Peak Drive Current	Inputs	Deadtime	Propagation Delay $t_{on} / t_{off}$	Rise / Fall Time $t_r / t_f$
High-Side and Low-Side Gate Drivers						
LF21064NTR	600V	600mA / 290mA	HIN / LIN	None	220ns / 200ns	100ns / 35ns
LF21814NTR		2.3A / 1.9A			180ns / 220ns	40ns / 20ns
LF21904NTR		4.5A / 4.5A			140ns / 140ns	25ns / 20ns

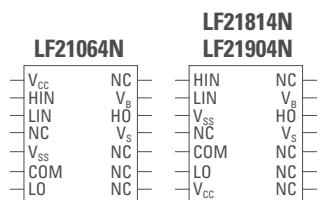


### 16-Pin SOIC

Part Number	Max. Offset Voltage	Typ. Sink / Source Peak Drive Current	Inputs	Deadtime	Propagation Delay $t_{on} / t_{off}$	Rise / Fall Time $t_r / t_f$
High-Side and Low-Side Gate Drivers						
LF2110BTR	500V	2.5A / 2.5A	HIN / LIN	None	105ns / 94ns	15ns / 13ns
LF2113BTR	600V					




### 14-Pin SOIC

Part Number	Max. Offset Voltage	Typ. Sink / Source Peak Drive Current	Inputs	Deadtime	Propagation Delay $t_{on} / t_{off}$	Rise / Fall Time $t_r / t_f$
Half-Bridge Gate Drivers						
LF21844NTR	600V	2.3A / 1.9A	IN / SD*	400ns - 5ms	680ns / 270ns	40ns / 20ns



### 20-Pin SOIC

Part Number	Max. Offset Voltage	Typ. Sink / Source Peak Drive Current	Inputs	Deadtime	Propagation Delay $t_{on} / t_{off}$	Rise / Fall Time $t_r / t_f$
3-Phase Half-Bridge Gate Driver						
LF2388BTR	600V	650mA / 350mA	HIN / LIN	270ns	130ns / 150ns	50ns / 35ns

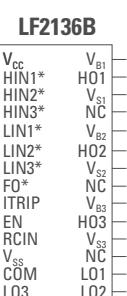

### 28-Pin SOIC


Part Number	Max. Offset Voltage	Typ. Sink / Source Peak Drive Current	Inputs	Deadtime	Propagation Delay $t_{on} / t_{off}$	Rise / Fall Time $t_r / t_f$
3-Phase Half-Bridge Gate Driver						
LF2136BTR	600V	350mA / 200mA	HIN* / LIN*	290ns	330ns / 330ns	90ns / 35ns

## Optically Isolated Gate Drivers




### 8-Pin DIP Dual Channel Photovoltaic Gate Driver

Part Number	Input Control Current (mA)	Open-Circuit Voltage $V_{oc}$ (V)	Minimum Short-Circuit Current ( $\mu A$ )	Nominal Short-Circuit Current ( $\mu A$ )	Switching Speeds $t_{on} / t_{off}$ (ms)	Isolation Voltage ( $V_{RMS}$ )
Optically Isolated Photovoltaic Gate Drivers						
FDA215	5	5.5	1	2.5	5 / 5	3750
FDA217		11.75	2.5	4.5	2 / 0.5	




### 8-Pin Surface Mount Dual Channel Photovoltaic Gate Driver

Part Number	Input Control Current (mA)	Open-Circuit Voltage $V_{oc}$ (V)	Minimum Short-Circuit Current ( $\mu A$ )	Nominal Short-Circuit Current ( $\mu A$ )	Switching Speeds $t_{on} / t_{off}$ (ms)	Isolation Voltage ( $V_{RMS}$ )
Optically Isolated Photovoltaic Gate Drivers						
FDA215S	5	5.5	1	2.5	5 / 5	3750
FDA217S		11.75	2.5	4.5	2 / 0.5	




### 8-Pin DIP Load-Biased Gate Driver

Part Number	Input Control Current (mA)	Open-Circuit Voltage $V_{oc}$ (V)	Blocking Voltage (V)	Minimum Short-Circuit Current ( $\mu A$ )	Maximum Short-Circuit Current ( $\mu A$ )	Switching Speeds $t_{on} / t_{off}$ (ms)	Isolation Voltage ( $V_{RMS}$ )
Optically Isolated Load-Biased Gate Drivers							
CPC1596G	2.5	14.4	570	2	13	0.08 / 0.6	3750




### 8-Pin Surface Mount Load-Biased Gate Driver

Part Number	Input Control Current (mA)	Open-Circuit Voltage $V_{oc}$ (V)	Blocking Voltage (V)	Minimum Short-Circuit Current ( $\mu A$ )	Maximum Short-Circuit Current ( $\mu A$ )	Switching Speeds $t_{on} / t_{off}$ (ms)	Isolation Voltage ( $V_{RMS}$ )
Optically Isolated Load-Biased Gate Drivers							
CPC1596GS	2.5	14.4	570	2	13	0.08 / 0.6	3750



### 8-Pin Flatpack Load-Biased Gate Driver

Part Number	Input Control Current (mA)	Gate Voltage @ $I_F=5mA$ ( $V_g$ )	Blocking Voltage ( $V_p$ )	Regulated Capacitor Voltage ( $V_{cap-max}$ )	Switching Speeds $t_{on} / t_{off}$ ( $\mu s$ )	Isolation Voltage ( $V_{RMS}$ )
Optically Isolated Load-Based Gate Drivers						
CPC1580P	2.5	7.5 - 12	65	$V_{DS} - 0.2V$	40 / 400	3750
CPC1590P			200	16		




## Linear/Standard Optocouplers





### 8-Pin DIP Linear Optocoupler

Part Number	Servo Gain $K1=I_1/I_F$ (Min - Max)	Forward Gain $K2=I_2/I_F$ (Min - Max)	Transfer Gain $K3=K_2/K_1$ (Min - Max)	Input Control Current (mA)	Isolation Voltage ( $V_{RMS}$ )
Linear Optocouplers					
LOC110	0.004 - 0.03	0.004 - 0.03	0.668 - 1.179		
LOC111	0.008 - 0.03	0.006 - 0.03	0.733 - 1.072		
LOC112	0.004 - 0.03	0.004 - 0.03	0.733 - 1.072		
LOC117	0.008 - 0.03	0.006 - 0.03	0.887 - 1.072	2 - 10	3750




### 8-Pin Surface Mount Linear Optocoupler

Part Number	Servo Gain $K1=I_1/I_F$ (Min - Max)	Forward Gain $K2=I_2/I_F$ (Min - Max)	Transfer Gain $K3=K_2/K_1$ (Min - Max)	Input Control Current (mA)	Isolation Voltage ( $V_{RMS}$ )
Linear Optocouplers					
LOC110S	0.004 - 0.03	0.004 - 0.03	0.668 - 1.179		
LOC111S	0.008 - 0.03	0.006 - 0.03	0.733 - 1.072		
LOC112S	0.004 - 0.03	0.004 - 0.03	0.733 - 1.072		
LOC117S	0.008 - 0.03	0.006 - 0.03	0.887 - 1.072	2 - 10	3750




### 8-Pin Flatpack Linear Optocoupler

Part Number	Servo Gain $K1=I_1/I_F$ (Min - Max)	Forward Gain $K2=I_2/I_F$ (Min - Max)	Transfer Gain $K3=K_2/K_1$ (Min - Max)	Input Control Current (mA)	Isolation Voltage ( $V_{RMS}$ )
Linear Optocouplers					
LOC110P	0.004 - 0.03	0.004 - 0.03	0.668 - 1.179		
LOC111P	0.008 - 0.03	0.006 - 0.03	0.733 - 1.072		
LOC112P	0.004 - 0.03	0.004 - 0.03	0.733 - 1.072		
LOC117P	0.008 - 0.03	0.006 - 0.03	0.887 - 1.072	2 - 10	3750



### 4-Pin SOP Optocoupler


Part Number	Minimum Breakdown Voltage ( $BV_{CEO}$ )	Typical Current Transfer Ratio (%)	Maximum Saturation Voltage (V)	Input Control Current (mA)	Minimum Isolation Voltage ( $V_{RMS}$ )
Single Optocouplers					
CPC1001N	30	330	0.3	0.2	1500



## Depletion Mode MOSFET




**SOT-89**



Part Number	$V_{(BR)DSX}$ (V)	$I_d$ Min (mA)	$R_{DS(on)}$ Max ( $\Omega$ )	$V_{GS(off)}$ Min (V)	$V_{GS(off)}$ Max (V)
<b>N-Channel Depletion Mode MOSFETs</b>					
CPC3701C	60	600	1	-1.4	-3.1
CPC3703C	250	360	4	-1.6	-3.9
CPC3708C	350	130	14	-2	-3.6
CPC3710C	250	220	10	-1.6	-3.9
CPC3714C	350	240	14	-1.6	-3.9
CPC3720C	350	130	22	-1.6	-3.9
CPC3730C	350	140	35	-1.6	-3.9
CPC3909C	400	300	6	-1.4	-3.1




**SOT-223**



Part Number	$V_{(BR)DSX}$ (V)	$I_d$ Min (mA)	$R_{DS(on)}$ Max ( $\Omega$ )	$V_{GS(off)}$ Min (V)	$V_{GS(off)}$ Max (V)	Features & Comments
<b>N-Channel Depletion Mode MOSFETs</b>						
CPC3980Z	800	100	45	-1.4	-3.1	-
CPC3960Z	600	100	44	-1.4	-3.1	-
CPC3909Z	400	300	6	-1.4	-3.1	-
CPC5603C	415	130	14	-2	-3.6	Designed for use with LITELINK™ applications
CPC3708Z	350	130	14	-2	-3.6	-
CPC5602C	350	130	14	-2	-3.6	Designed for use with LITELINK™ applications
CPC3902Z	250	400	2.5	-1.4	-3.1	-




**SOT-23**




Part Number	$V_{(BR)DSX}$ (V)	$I_d$ Min (mA)	$R_{DS(on)}$ Max ( $\Omega$ )	$V_{GS(off)}$ Min (V)	$V_{GS(off)}$ Max (V)	Features & Comments
<b>N-Channel Depletion Mode MOSFETs</b>						
CPC3982T	800	20	380	-1.4	-3.1	Very small package

## Telecommunication Products




**32-Pin SOIC**

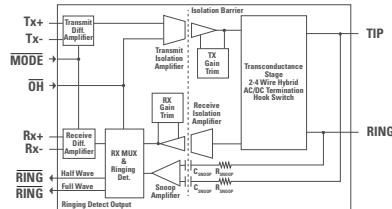

Part Number	Isolation Voltage ( $V_{RMS}$ )	Power Supply (V)	Caller ID	Ringing Detect
<b>LITELINK™ Galvanically Isolated Phone Line Interface</b>				
CPC5622A	3000	3.3 - 5	Continuous	Half-wave & full-wave
CPC5621A			Selectable (CID=0)	Full-wave (CID=1)
CPC5620A			Selectable (CID=0)	Half-wave (CID=1)




**28-Pin SOIC**

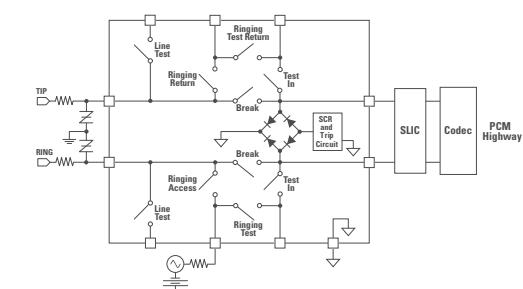

Part Number	Minimum 1500V/ $\mu$ s dV/dt	Switch Pairs						Zero-Cross Switching	Protection Features				Logic States
		# Switches	Break	Ringing	Line Test	Test In	Ringing Test		Current Limit	Diode Bridge	Protection SCR	Minimum Hold Current (mA)	
<b>Line Card Access Switch (LCAS)</b>													
CPC7695B	•	10	•	•	•	•	•	•	•	•	•	110	9



**20-Pin SOIC**

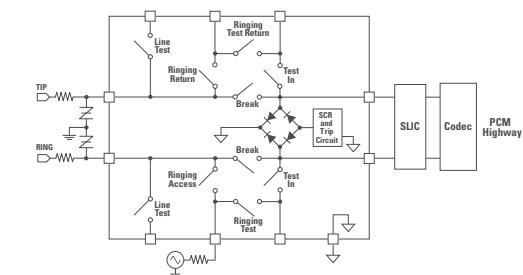


Part Number	Minimum 1500V/ $\mu$ s dV/dt	Switch Pairs						Zero-Cross Switching	Protection Features				Logic States
		# Switches	Break	Ringing	Line Test	Test In	Ringing Test		Current Limit	Diode Bridge	Protection SCR	Minimum Hold Current (mA)	
<b>Line Card Access Switch (LCAS)</b>													
CPC7695Z	•	10	•	•	•	•	•	•	•	•	•	110	9

## Multifunction Products: SSR/Optocouplers



### 16-Pin SOIC

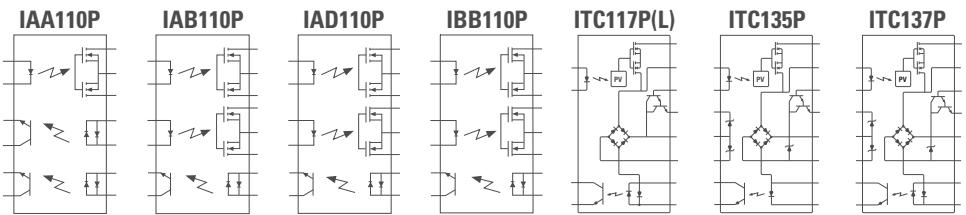


Part Number	SSR Characteristics				Optocoupler Characteristics				Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
	Blocking Voltage (V <sub>P</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)		
General Purpose Multifunction Products										
IAA110P	350	100	35	5	20	33	0.5	6	3750	Two 1-Form-A relays, one optocoupler
IAB110P										One 1-Form-A relay, one 1-Form-B relay, one optocoupler
IAD110P										One 1-Form-A relay, two optocouplers
IBB110P										Two 1-Form-B relays, one optocoupler
ITC117P(L)										
Telecommunications Multifunction Products										
ITC117PL	350	120	15	5	20	33	0.5	6	3750	Full-wave ringing detect, current limiting
ITC117P										Full-wave ringing detect
ITC135P										Half-wave ringing detect
ITC137P										Full-wave ringing detect

## Multifunction Products: SSR/Optocouplers




### 8-Pin Flatpack

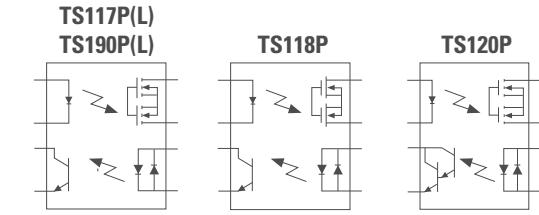

Part Number	SSR Characteristics				Optocoupler Characteristics				Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
	Blocking Voltage (V <sub>P</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)		
General Purpose Multifunction Products										
TS190PL	400	150	25	5	20	33	0.5	6	3750	One current-limiting 1-Form-A relay, one optocoupler
TS190P										One 1-Form-A relay, one optocoupler
TS120P										One 1-Form-A relay, one Darlington optocoupler
TS118P										One 1-Form-B relay, one optocoupler
TS117P										One 1-Form-A relay, one optocoupler
TS117PL										One current-limiting 1-Form-A relay, one optocoupler




### 8-Pin DIP

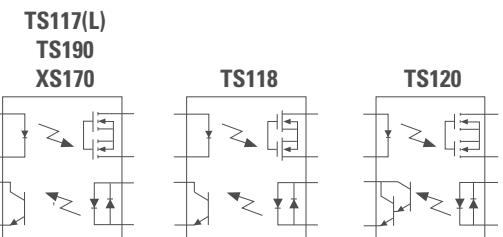

Part Number	SSR Characteristics				Optocoupler Characteristics				Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
	Blocking Voltage (V <sub>P</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)		
General Purpose Multifunction Products										
TS190	400	150	22	5	20	33	0.5	6	3750	One 1-Form-A relay, one optocoupler
XS170										One 1-Form-A relay, one optocoupler
TS120										One 1-Form-A relay, one Darlington optocoupler
TS118										One 1-Form-B relay, one optocoupler
TS117										One 1-Form-A relay, one optocoupler
TS117L										One current-limiting 1-Form-A relay, one optocoupler



### 8-Pin Surface Mount

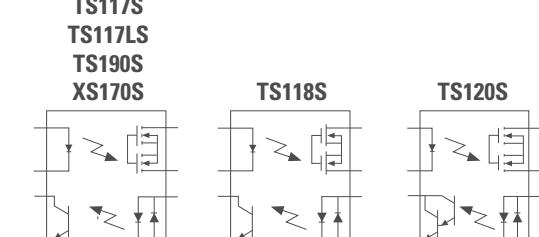

Part Number	SSR Characteristics				Optocoupler Characteristics				Isolation Voltage (V <sub>RMS</sub> )	Features & Comments
	Blocking Voltage (V <sub>P</sub> )	Load Current (mA)	On Resistance (Ω)	Input Control Current (mA)	Breakdown Voltage (V)	Current Transfer Ratio (%)	Saturation Voltage (V)	Input Control Current (mA)		
General Purpose Multifunction Products										
TS190S	400	150	22	5	20	33	0.5	6	3750	One 1-Form-A relay, one optocoupler
XS170S										One 1-Form-A relay, one optocoupler
TS117S										One 1-Form-A relay, one Darlington optocoupler
TS120S										One current-limiting 1-Form-A relay, one optocoupler
TS190LS										One current-limiting 1-Form-A relay, one optocoupler
TS117LS										One current-limiting 1-Form-A relay, one optocoupler
TS118S										One 1-Form-B relay, one optocoupler



You need to be certain that your products live up to the highest standards for performance, reliability, safety, and regulatory compliance. Working with Littelfuse, you have access to dedicated application engineers who partner with you to provide expert design consultation, perform comprehensive tests simulating the harshest environments, and confidentially evaluate the results in consultation with you.

### TESTING CAPABILITIES

#### Environmental


- Autoclave
- Dust
- H3TRB
- HAST
- High- & Low- Temperature Storage
- High-Temperature Loading
- Ingress Protection (IP)
- HTGB
- HTRB
- Temperature & Humidity
- Temperature Cycling
- Thermal Shock
- Salt Fog

#### Physical-Mechanical Characteristics

- Acceleration
- Die Shear
- Leak Detection
- Mechanical Shock
- Resistance to Soldering Heat (Dip, Reflow, Wave)
- Resistance to Solvents
- Solderability
- Terminal Strength (Push, Pull, Bend)
- Vibration
- Wetting Balance
- Wire Pull

#### Electrical

- BCI
- Capacitance
- EFT
- ESD
- Impedance
- Insulation Resistance
- I-V
- Life
- Lightning Surge
- Overload
- Parametric Tests
- Power-Cross
- Power Cycling
- Ring Wave
- R-T
- S-Parameter Measurements (Insertion Loss, Isolation, Reflection)
- Short Circuit
- Step Current
- Surface Resistivity
- Surge
- TDR (Eye Diagram)
- Telecom
- Thermal Cut-Off
- Time-to-Trip
- TLP
- Transient
- Trip Cycle
- Trip Endurance
- Voltage Drop

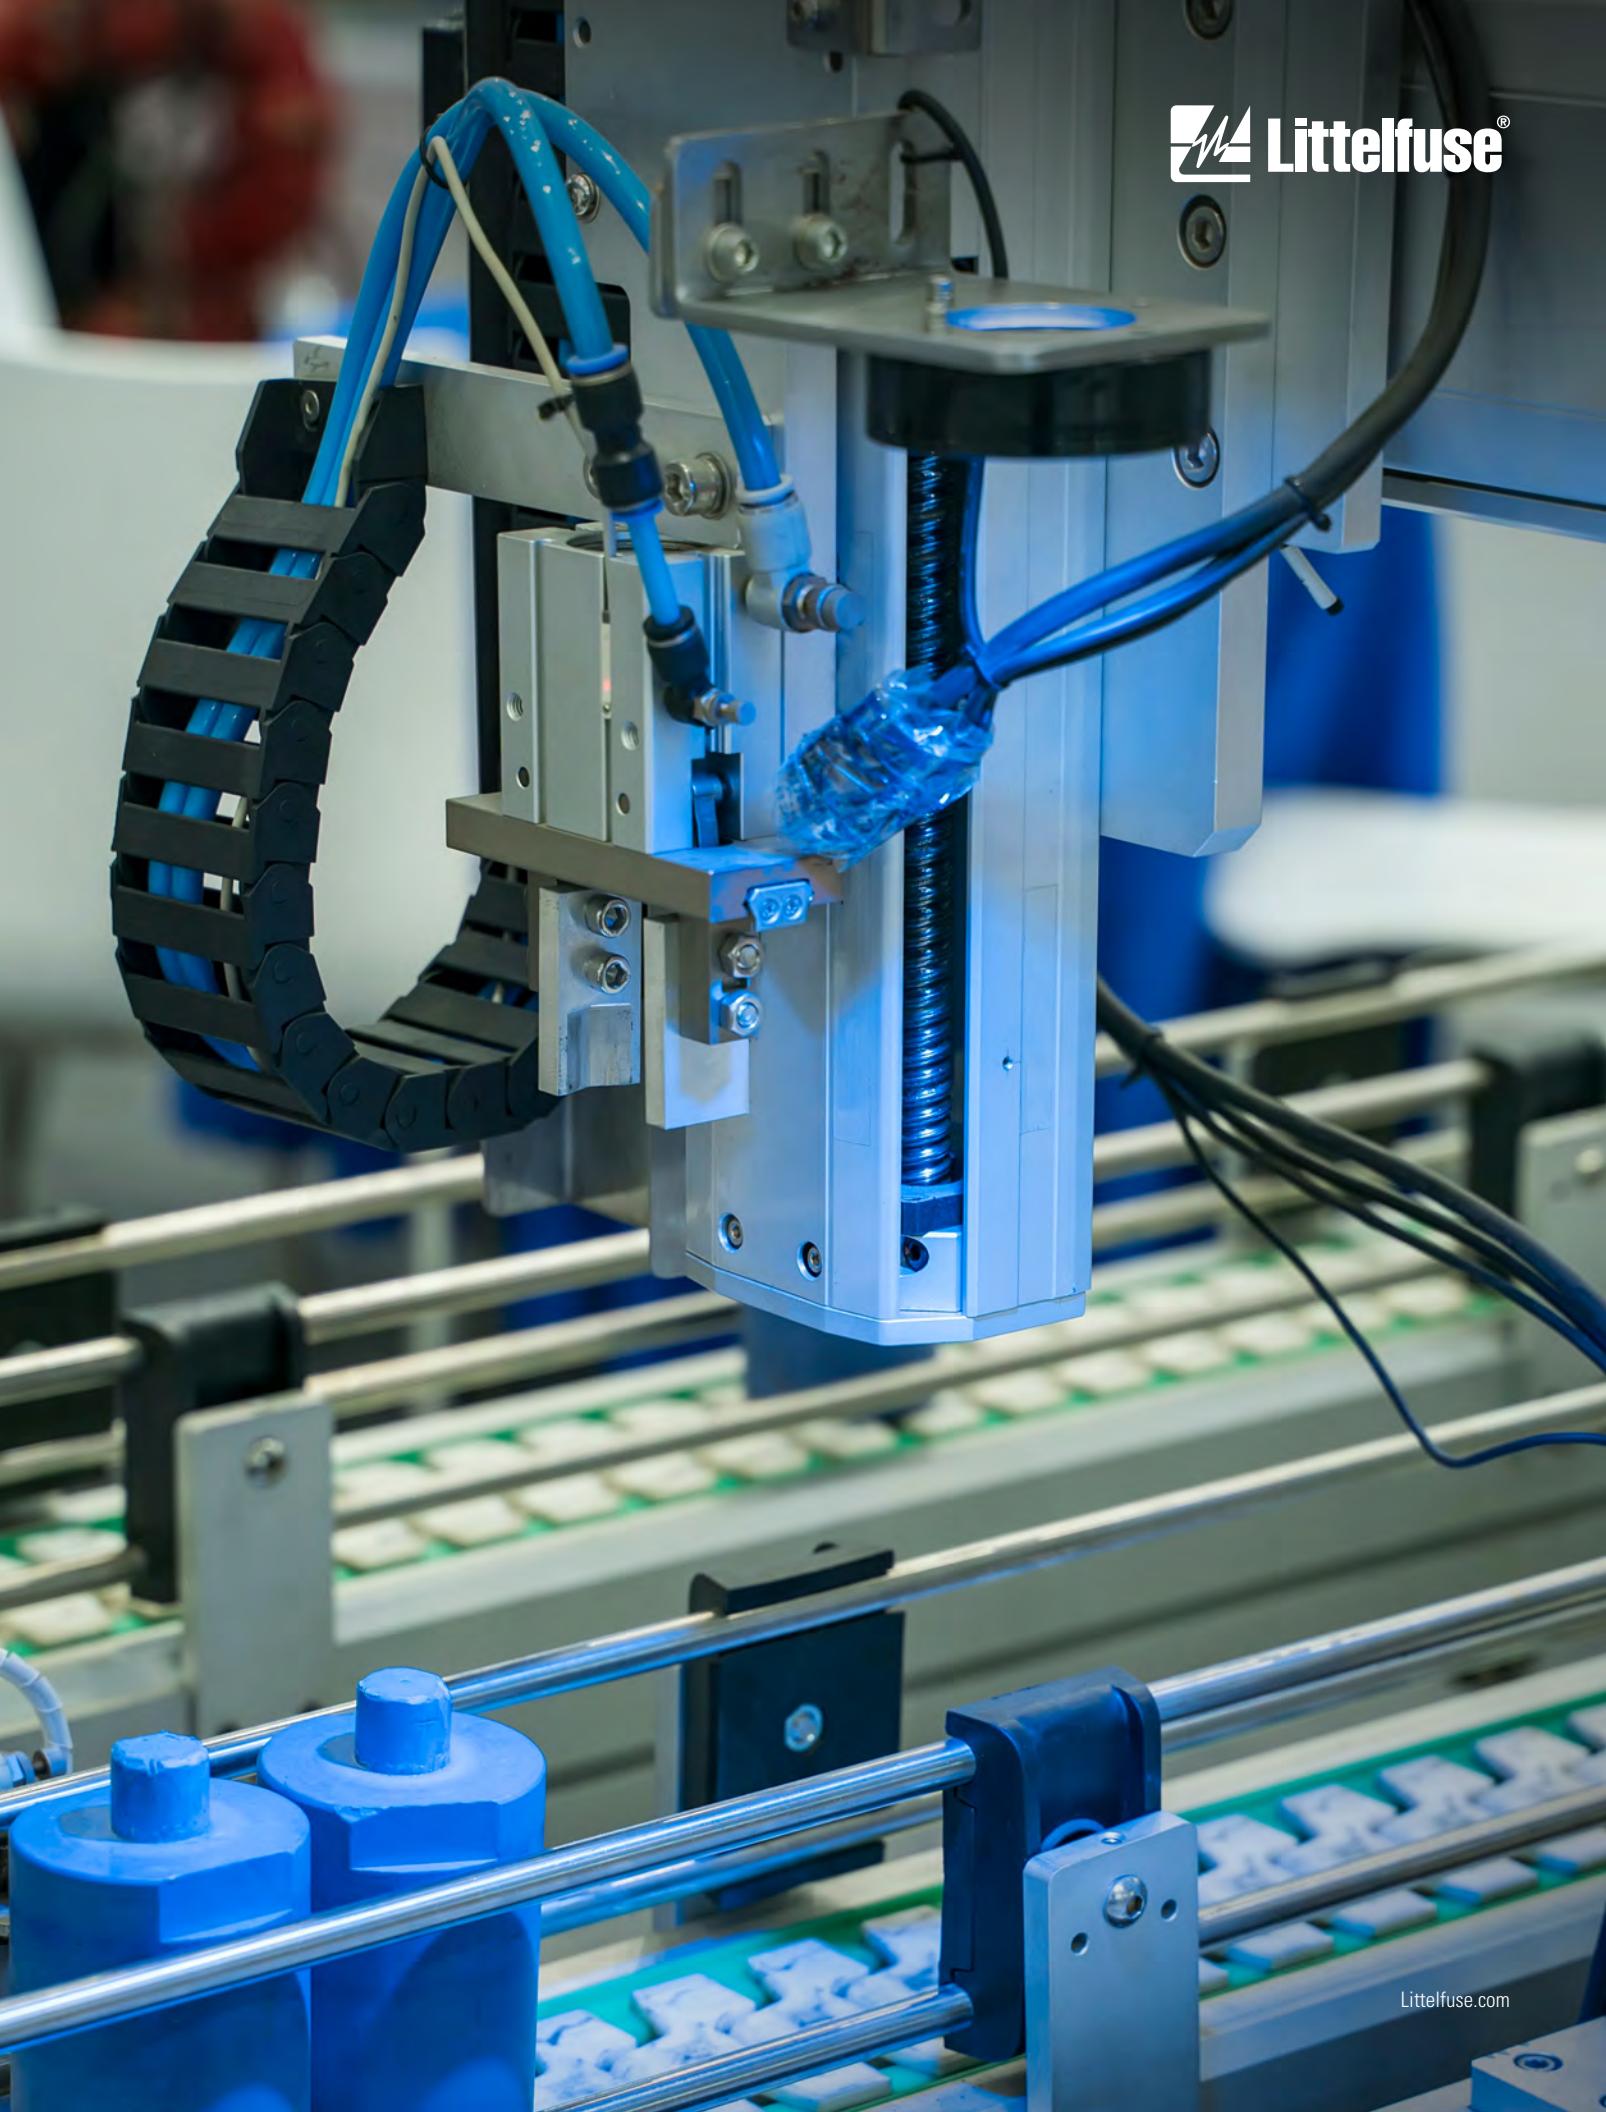

Scan to download

To access this guide and other **Littelfuse** literature in an interactive and mobile-friendly format, please visit our **eCatalog** library.

# LOCAL RESOURCES FOR A **GLOBAL** MARKET

