

Coaxial

# Low Pass Filter

ZLFV-K1652+

50Ω DC to 16500 MHz



## The Big Deal

- Good power handling, 3.2W
- Temperature stable
- Broadband connectorized package
- Good rejection, 33 dB typical

*Generic photo used for illustration purposes only*

CASE STYLE: UK3042

## Product Overview

ZLFV-K1652+ is a 50Ω low pass filter built in broadband connectorized package. Covering DC-16500 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. ZLFV-K1652+ offer low insertion loss, and excellent power handling capability. It handles up to 3.2W RF input power and provides a wide operating temperature range from -55°C to 125°C.

## Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application.
3.2W Power handling	Supports a range of system power requirements.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

### Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

# Low Pass Filter

50Ω

DC to 16500 MHz

ZLFV-K1652+


## Features

- Good rejection 33dB typ.
- Good power handling, 3.2W
- Temperature stable



## Applications

- Military radar applications
- Test and measurement
- Telecommunications & broadband wireless applications

## Functional Schematic

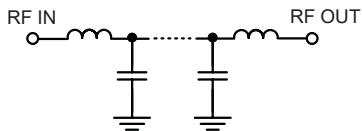

## Typical Frequency Response

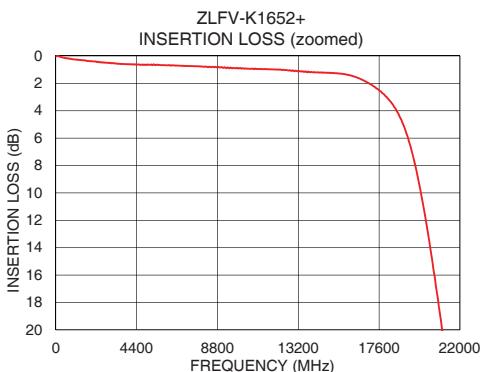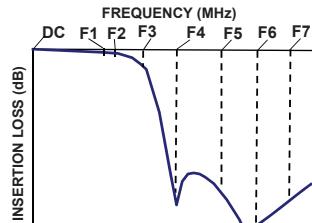

Generic photo used for illustration purposes only  
CASE STYLE: UK3042  
Connectors Model  
2.92mm-F ZLFV-K1652+



### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Electrical Specifications at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	DC - 15500	—	1.5	2.5	dB
		F1-F2	15500 - 16500	—	2.0	—	dB
	Frequency Cut-off	F3*	18000	—	3.0	—	dB
		DC-F1	DC - 15500	—	13	—	dB
Stop Band	Return Loss	F1-F2	15500 - 16500	—	10	—	dB
		F4-F5	22500 - 25000	20	33	—	dB
	Rejection Loss	F5-F6	25000 - 26500	22	33	—	dB
		F6-F7	26500 - 40000	—	30	—	dB

In Applications where DC voltage is present at either input or output ports, DC blocks are required.

\* Typically, a  $\pm 5\%$  frequency deviation from the stated value may occur on a unit-to-unit basis.


### Maximum Ratings

Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	3.2W max. @25°C

\*Passband rating, derate linearly to 1.6W at 125°C ambient  
Permanent damage may occur if any of these limits are exceeded.

## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
25	0.02	46.91
200	0.04	40.25
1000	0.25	34.35
2000	0.39	26.36
3000	0.50	20.56
6000	0.68	22.33
12000	0.99	22.09
15500	1.29	20.75
16500	1.63	14.22
18000	2.99	7.28
19875	10.02	2.69
21050	20.18	1.68
21975	30.11	1.31
22500	37.62	1.17
25000	33.46	1.32
26500	35.78	1.95
30000	34.56	1.80
32000	41.69	8.07
35000	34.44	1.39
40000	31.08	2.74

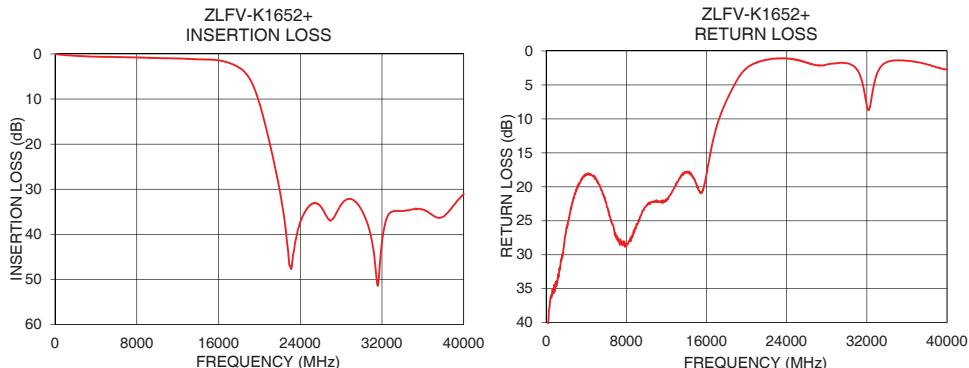


### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



**Coaxial Connections**

PORt - 1	2.92mm-Female
PORt - 2	2.92mm-Female

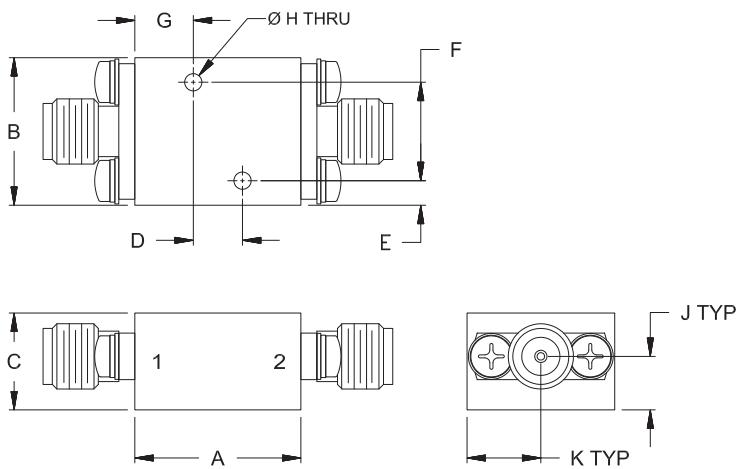**Outline Drawing****Outline Dimensions ( <sup>inch</sup> mm )**

A	B	C	D	E	F
.68	.60	.39	.200	.10	.400
17.1	15.2	10.0	5.08	2.5	10.16
G	H	J	K		
.24	.070	.22	.30	Wt.	
6.0	1.78	5.5	7.6	grams	
					24

Note: Please refer to case style drawing for details

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZLFV-K1652+](#)