

T3DSO4000L-HD Fact Sheet

Low Profile Oscilloscope



500 MHz – 2 GHz
12-bit High Resolution



Key Specifications

Bandwidth	500 MHz, 1 GHz and 2 GHz Bandwidth models
Channels	4 or 8 analog channels plus EXT
Memory	500 Mpts/ch (1 CH), 250 Mpts/ch (2 CHs), 125 Mpts/ch (3 or 4 CHs)
Sample Rate (Max)	10 GSa/s with ESR per channel
Waveform capture rate (Max.)	Normal mode: 170,000 wfm/s; Sequence mode: 750,000 wfm/s
Waveform Generator	Built-in 25 MHz Waveform Generator

Tools for Improved Debugging

- **Low profile form factor:**
4 Channel Model: 1U High Package
8 Channel Model: 2U High Package
 - ✓ Get better insight on the signal being measured with minimal noise interference.
- **12-bit ADC combined with low noise front end provides excellent noise performance.**
 - ✓ Low-profile, high-density package saves rack space for automated test applications.
- **Math and Measure** – 9 basic math functions plus FFT, and 50+ automatic measurement parameters.
 - ✓ Extract results from waveforms and measurements.
- **Built-in web server** – supports remote control over LAN port.
 - ✓ Save data for external analysis and screen images for reports.
- **History** – record function, the maximum recorded waveform length is 80,000 frames.
 - ✓ Replay the changing waveform history.
- **Includes Bode Plot, Eye/Jitter Analysis, and Power Analysis applications as standard.**
 - ✓ Common applications coverage as standard.
- **Optional 16 Channel Logic Probe to enable Mixed Signal functionality.**
 - ✓ Add mixed signal debugging to your Oscilloscope.

For more information, please contact:




T3DSO4000L-HD Fact Sheet

Low Profile Oscilloscope





T3DSO4000L-HD Functions & Characteristics

1 Deep Record Length

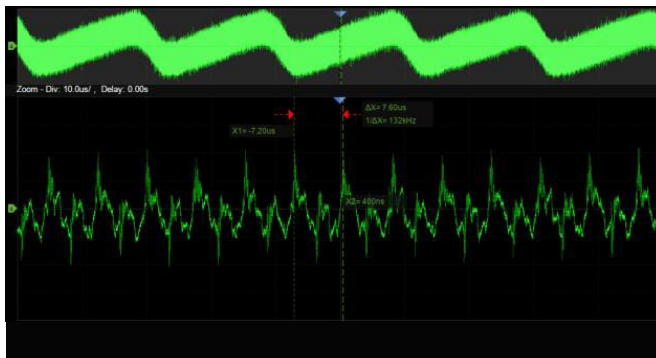


2 12-bit High Resolution

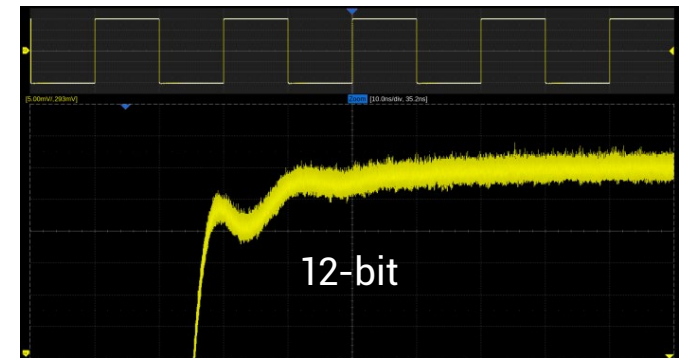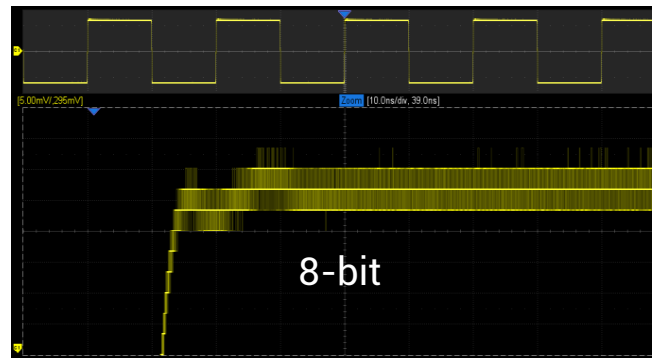


12-bit resolution shows you more details and less noise on the waveform.

3 High Waveform Update Rate

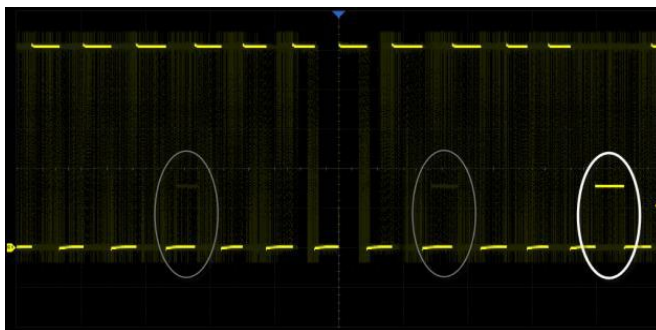


With a waveform update rate of up to 170,000 wfm/s, the oscilloscope can easily capture unusual or low-probability events. In Sequence mode, the waveform capture rate can reach 750,000 wfm/s.

4 High Performance Front-end

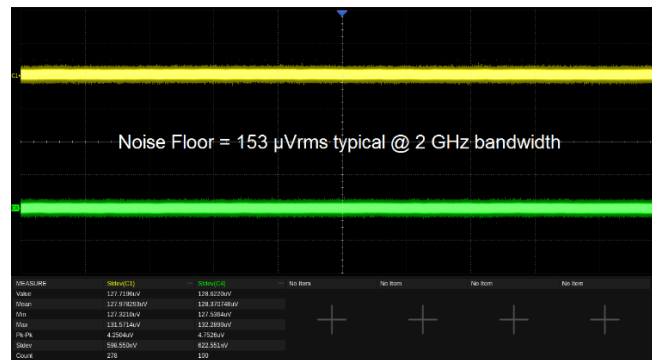

The noise floor value is: 153 μV_{rms} at full bandwidth of 2 GHz
125 μV_{rms} at bandwidth of 1 GHz.

5 Superb DC Gain Accuracy

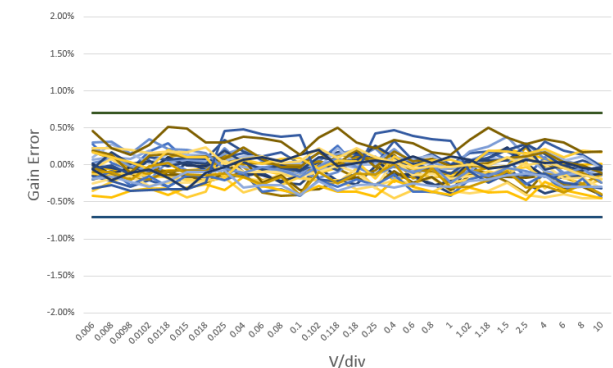

A typical DC Gain Accuracy 0.5 % combined with low noise floor provides the capability to perform sensitive measurement required for wide range of applications.