

GQA DC-DC Power Module Series



9-36V Wide Input, 120W Output
Quarter Brick

The GQA Series of dc-dc converters offers a high performance quarter brick package with true usable power, a wide range input voltage operation range, and a broad selection of operating output voltages. A robust package design with multiple baseplate options make GQA modules suitable for use in a wide variety of demanding environments.

Features

- Size – 60.6mm x 49.5 mm x 12.7 mm (2.39 in. x 1.95 in. x 0.5 in.) – flanged base plate
- Through hole pins 4.57mm tail length
- Up to 120W of output power
- Negative logic on/off
- Low output noise
- Output voltage adjustment
- Constant switching frequency
- Remote Sense (selected models)
- Full, auto-recovery protection:
 - Input under voltage
 - Output Over current
 - Short circuit
 - Over Temperature
- ISO Certified manufacturing facilities

Options

- Size - 60.6mm x 39.5 mm x 12.7 mm (2.39 in. x 1.56 in. x 0.5 in.) – non-flanged base plate
- Clock Synchronization
- Case and Potting for additional protection against environment
- 3KVdc input to output isolation



Advance Data Sheet: GQA Power Module – Single Output Quarter Brick

Ordering information:

Product Identifier	Package Size	Platform	Input Voltage	Output Current/Power	Output Units	Main Output Voltage	# of Outputs	Feature Set Indicator	Screening Indicator
G	Q	A	2W	004	A	280	V	-	007
G-series	Quarter brick	A series	2W - 09-36V 24 – 18-36	005 - 5 010 - 10	A – Amps W – Watts	480 - 48 280 – 28 240 – 24 150 - 15 120 – 12 050 – 5	V – Single	007 – Standard	R-RoHS 6

Option Table:

Feature Set	Negative Logic On/Off	0.180" Pin Length	Flanged Base Plate	Non-Flanged Base Plate	Case & Potting 3KV isolation	Case & Potting
007	X	X	X			
N07	X	X		X		
0P7	X	X	X		X	
NP7	X	X		X		X

Product Offering:

Code	Vin	Vout	Iout (A)	Maximum Output Power (W)	Remote Sense
GQA24003A480V-007-R	18-36	48	2.5	120	No
GQA2W004A280V-007-R	9-36	28	4.28	120	No
GQA2W005A240V-007-R	9-36	24	5	120	No
GQA2W008A150V-007-R	9-36	15	8	120	Yes
GQA2W010A120V-007-R	9-36	12	10	120	Yes
GQA2W024A050V-007-R	9-36	5	24	120	Yes




401 Mile Cars Way, Suite 125
National City, CA 91950
Phone (800)526-2324 Toll Free

Lambda.TechSupport@us.tdk-lambda.com
www.us.tdk-lambda.com/lp/

Mechanical Specification: (with flange)

Dimensions are in mm [in]. Unless otherwise specified tolerances are:

$x.x [x.xx] \pm 0.5 [0.02]$, $x.xx [x.xxx] \pm 0.25 [0.010]$

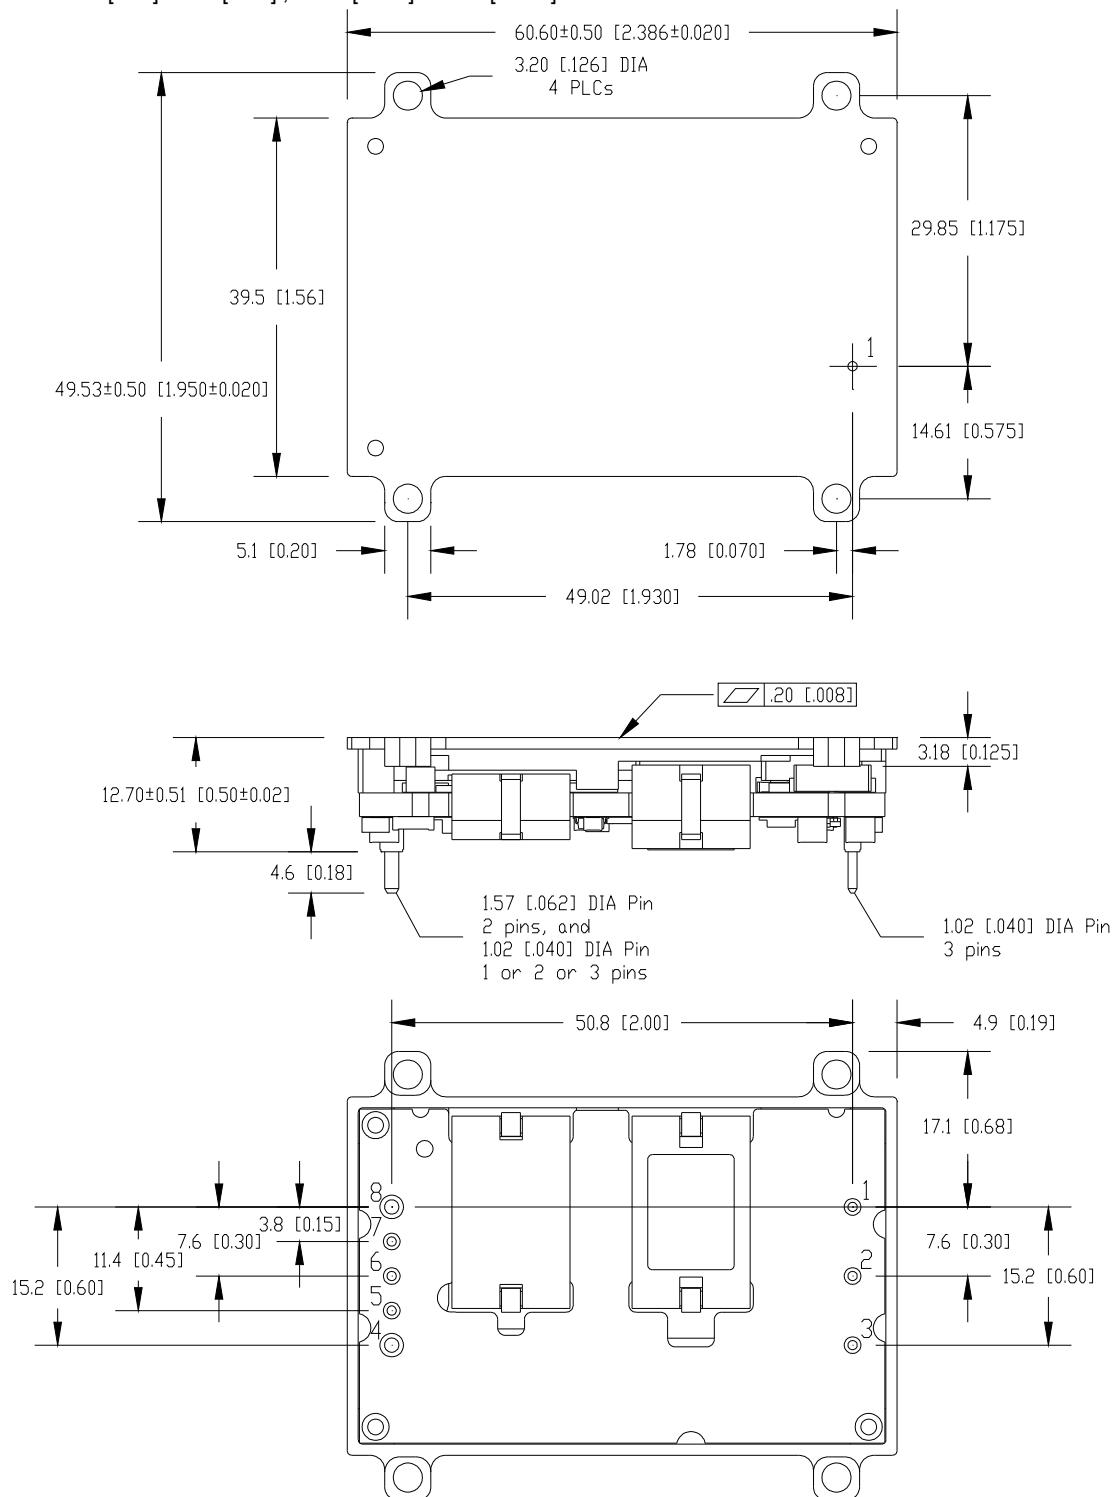


Mechanical Specification: (no flange)

Dimensions are in mm [in]. Unless otherwise specified tolerances are:

x.x [x.xx] \pm 0.5 [0.02], x.xx [x.xxx] \pm 0.25 [0.010]


To avoid damaging components, do not exceed 3.0mm [0.12"] depth for M3 screws

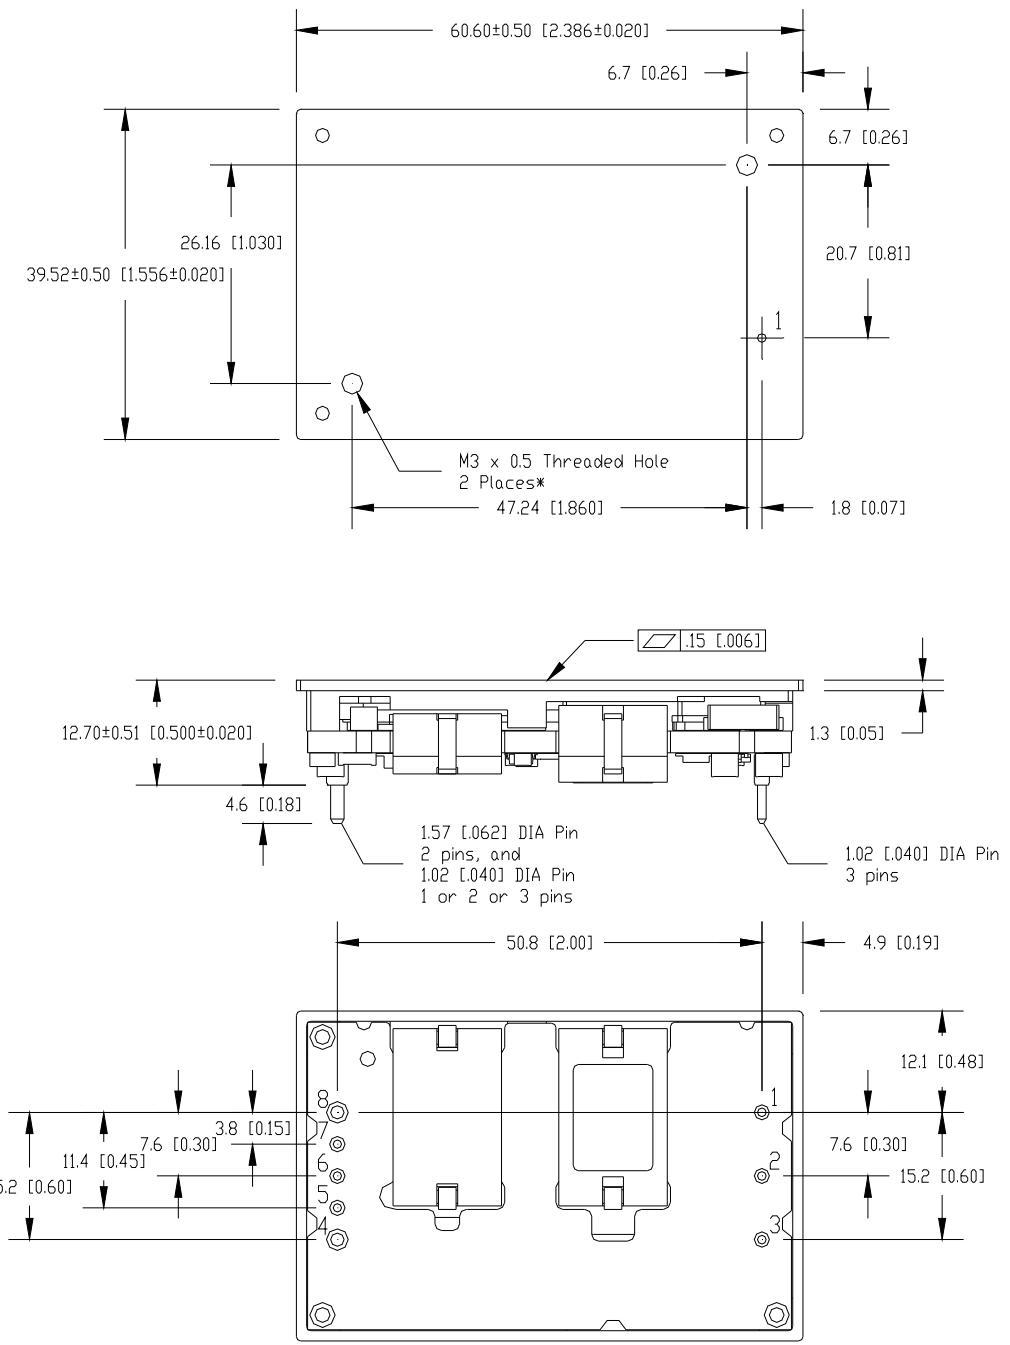

Mechanical Specification: (with flange - potted)

Dimensions are in mm [in]. Unless otherwise specified tolerances are:

$x.x$ [$x.xx$] ± 0.5 [0.02], $x.xx$ [$x.xxx$] ± 0.25 [0.010]



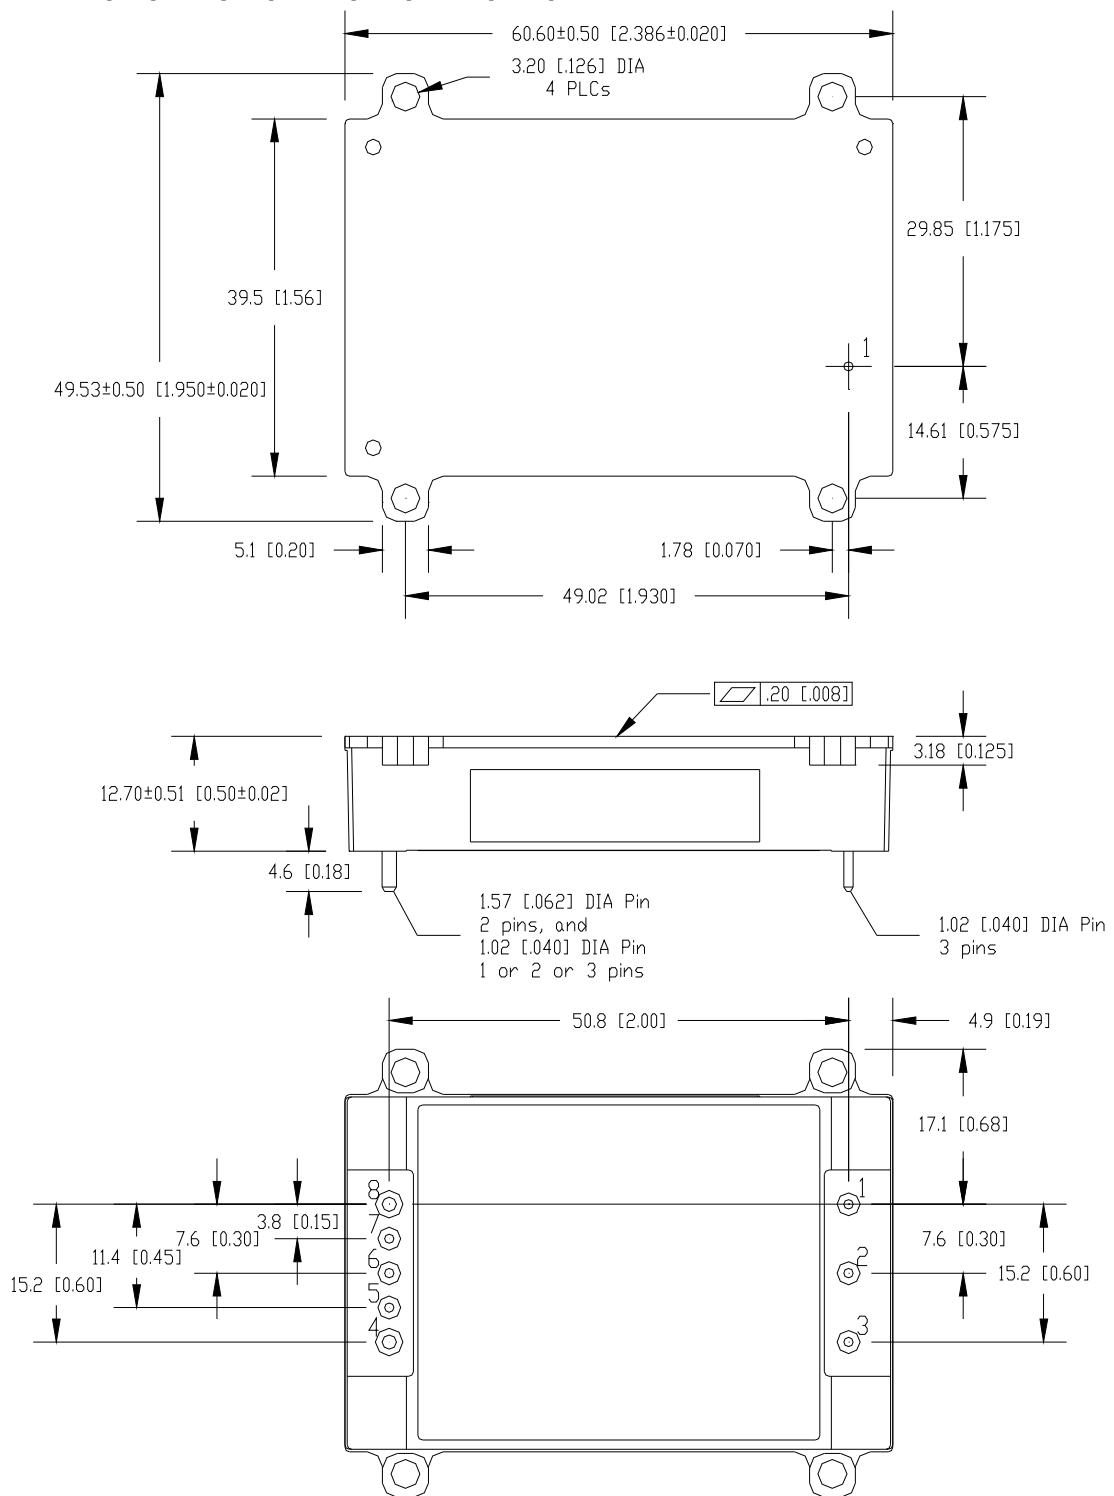



Mechanical Specification: (no flange - potted)

Dimensions are in mm [in]. Unless otherwise specified tolerances are:


$x.x [x.xx] \pm 0.5 [0.02]$, $x.xx [x.xxx] \pm 0.25 [0.010]$

To avoid damaging components, do not exceed 3.0mm [0.12"] depth for M3 screws

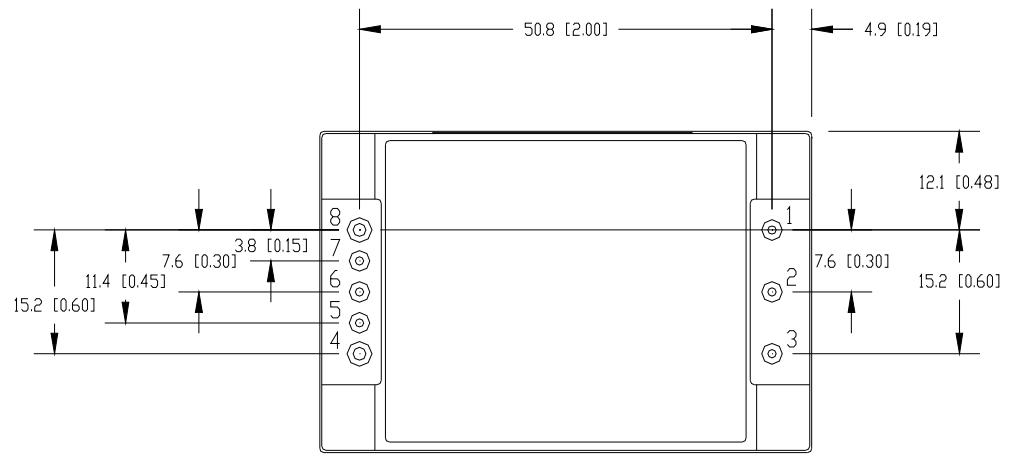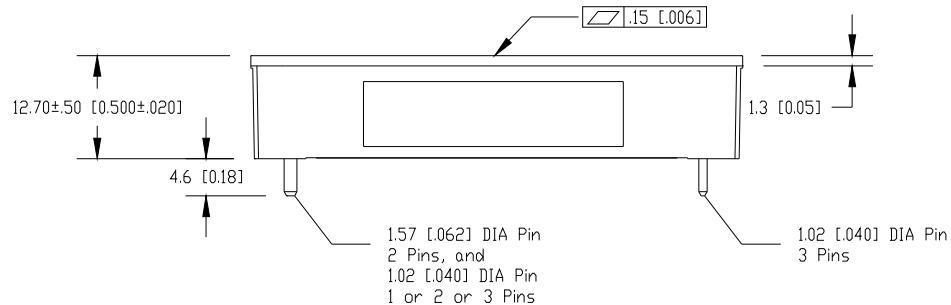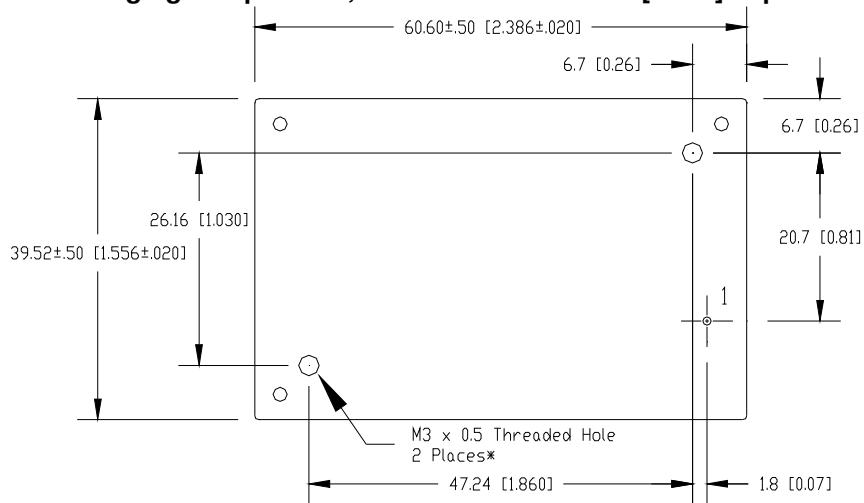

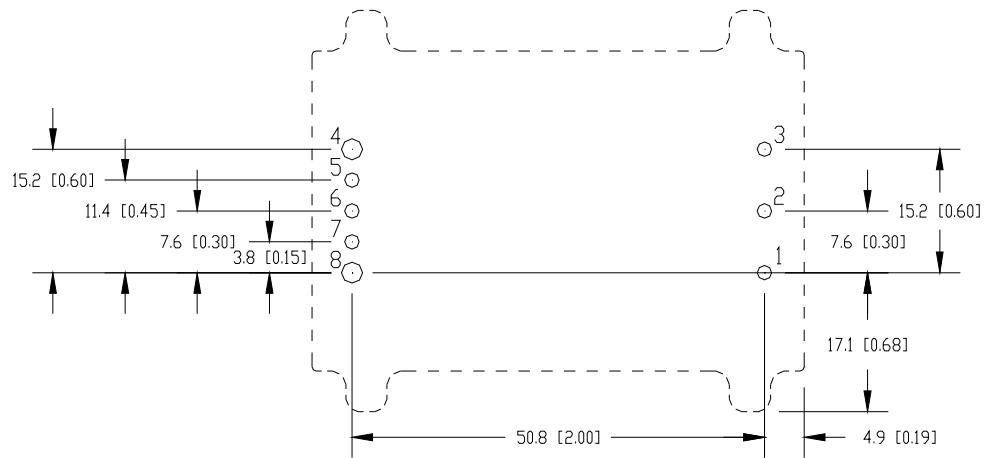Recommended Hole Pattern: (top view with flange)


(without flange)

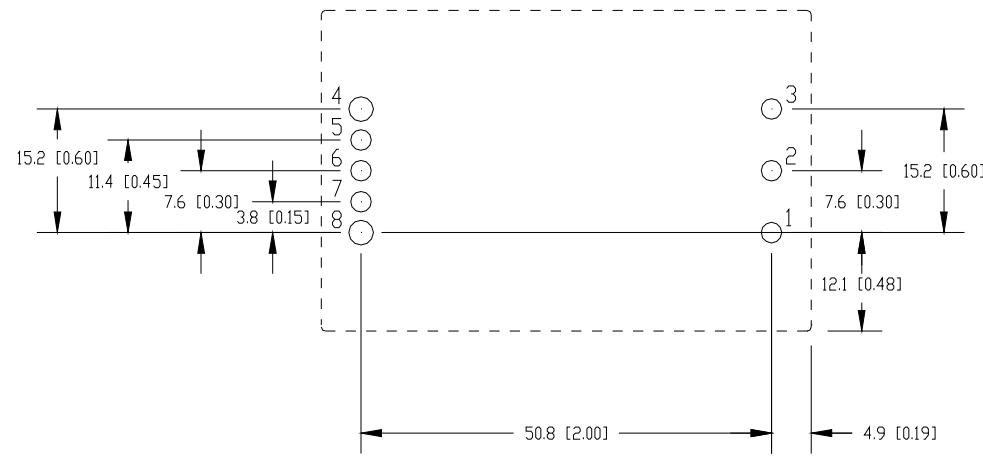
Pin Assignment:

PIN	FUNCTION	PIN	FUNCTION
1	Vin(+)	5	sense (-), select models
2	On/Off	6	Trim
3	Vin(-)	7	sense (+), select models
4	Vo(-)	8	Vo(+)

Pin base material is tellurium copper with tin over nickel plating; the maximum module weight is 85g (3oz)

Absolute Maximum Ratings:

Stress in excess of Absolute Maximum Ratings may cause permanent damage to the device.

Characteristic	Min	Max	Unit	Notes & Conditions
Continuous Input Voltage	-0.5	40	Vdc	
Transient Input Voltage	---	50	Vdc	(t < 1s)
Isolation Voltage	---	1500	Vdc	Input to Output
	---	2250	Vdc	Input to Output (-NP7)
	---	3000	Vdc	Input to Output (-OP7) option
	---	1500	Vdc	Baseplate to Input or Output
	---	2250	Vdc	Baseplate to Input or Output (-OP7, -NP7)
Storage Temperature	-55	125	°C	
Operating Temperature Range (Tc)	-40	105*	°C	Measured at the location specified in the thermal measurement figure. Maximum temperature varies with model number, output current, and module orientation – see curve in thermal performance section of the data sheet.

*Engineering estimate

Input Characteristics:

Unless otherwise specified, specifications apply over all Rated Input Voltage, Resistive Load, and Temperature conditions.

Characteristic	Min	Typ	Max	Unit	Notes & Conditions
Operating Input Voltage	10	---	36	Vdc	All except 48Vout
Operating Input Voltage (48Vout)	18.5	---	36	Vdc	
Maximum Input Current	---	---	17	A	Vin = 0 to Vin,max; all except 48Vout
Maximum Input Current (48Vout)	---	---	10	A	Vin = 0 to Vin,max
Turn-on Voltage	---	9.5	10.5	Vdc	All except 48Vout
Turn-on Voltage (48Vout)	---	17	18	Vdc	
Turn-off Voltage	---	8.5	9	Vdc	All except 48Vout
Turn-off Voltage (48Vout)	---	15.5	17.5	Vdc	
Hysteresis	---	1	---	Vdc	
Startup Delay Time from application of input voltage	---	5	---	ms	Vo = 0 to 0.1*Vo,nom; on/off =on, Io=Io,max, Tc=25°C
Startup Delay Time from on/off	---	5	---	ms	Vo = 0 to 0.1*Vo,nom; Vin = Vi,nom, Io=Io,max, Tc=25°C
Output Voltage Rise Time	---	20	---	ms	Io=Io,max, Tc=25°C, Vo=0.1 to 0.9*Vo,nom
Inrush Transient	---	---	0.3	A ² s	
Input Reflected Ripple	---	15*	---	mApp	See input/output ripple and noise measurements figure; BW = 20 MHz
Input Ripple Rejection	---	55*	---	dB	@120Hz

*Engineering estimate

Caution: The power modules are not internally fused. An external input line normal blow fuse with a maximum value of 30A is required, see the Safety Considerations section of the data sheet.

Advance Data Sheet: GQA Power Module – Single Output Quarter Brick

GQA24002A480V: 48V, 2.5A Output


Characteristic	Min	Typ	Max	Unit	Notes & Conditions
Output Voltage Initial Setpoint	46.6	48	49.5	Vdc	$V_{in}=V_{in,nom}$; $I_o=I_o,max$; $T_c = 25^\circ C$
Output Voltage Tolerance	46.1	48	49.9	Vdc	Over all rated input voltage, load, and temperature conditions to end of life
Efficiency	---	91.5	---	%	$V_{in}=V_{in,nom}$; $I_o=I_o,max$; $T_c = 25^\circ C$
Line Regulation	---	0.05	---	%	$V_{in}=V_{in,min}$ to $V_{in,max}$
Load Regulation	---	0.03	---	%	$I_o=I_o,min$ to I_o,max
Temperature Regulation	---	0.5	---	%	$T_c=T_c,min$ to T_c,max
Output Current	0	---	2.5	A	
Output Current Limiting Threshold	---	4	---	A	$V_o = 0.9*V_{o,nom}$, $T_c < T_c,max$
Short Circuit Current	---	0.1	---	A	$V_o = 0.25V$, $T_c = 25^\circ C$
Output Ripple and Noise Voltage	---	125	300*	mVpp	Measured across one 22 uF and one 0.1uF ceramic capacitor – see input/output ripple measurement figure; BW = 20MHz
	---	35	---	mVrms	
Output Voltage Adjustment Range	95	---	110	% $V_{o,nom}$	Adjustment range is reduced at input voltages below 20V
Dynamic Response: Recovery Time Transient Voltage	---	1	---	mS	$di/dt = 0.1A/\mu S$, $V_{in}=V_{in,nom}$; load step from 50% to 75% of I_o,max
	---	300	---	mV	
Output Voltage Overshoot during startup	---	---	5	%	$V_{in}=V_{in,nom}$; $I_o=I_o,max$, $T_c=25^\circ C$
Switching Frequency	---	270	---	kHz	Fixed
Output Over Voltage Protection	---	54	---	V	
External Load Capacitance	0	---	1000&	uF	
Isolation Capacitance	---	0.01	---	uF	
Isolation Resistance	10	---	---	MΩ	
R _a		61.9		kΩ	Required for trim calculation
R _b		6.19		kΩ	Required for trim calculation

* Engineering estimate

& Contact TDK-Lambda for applications that require additional capacitance or very low esr


Electrical Characteristics:

GQA24003A480V: 48V, 2.5A Output

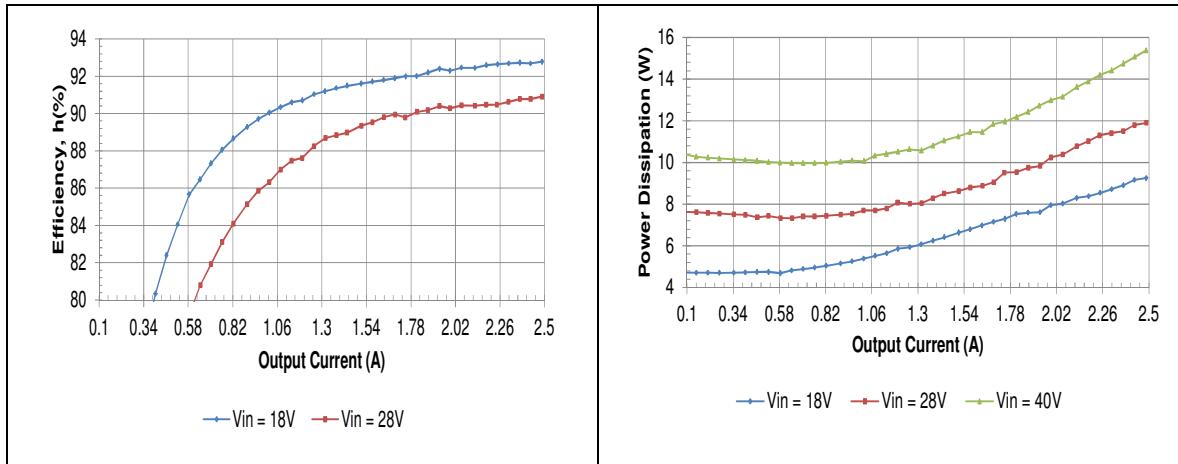


GQA24003A480V Typical Efficiency vs. Input Voltage at $T_a=25$ degrees.

GQA24003A480V Typical Power Dissipation vs. Input Voltage at $T_a=25$ degrees

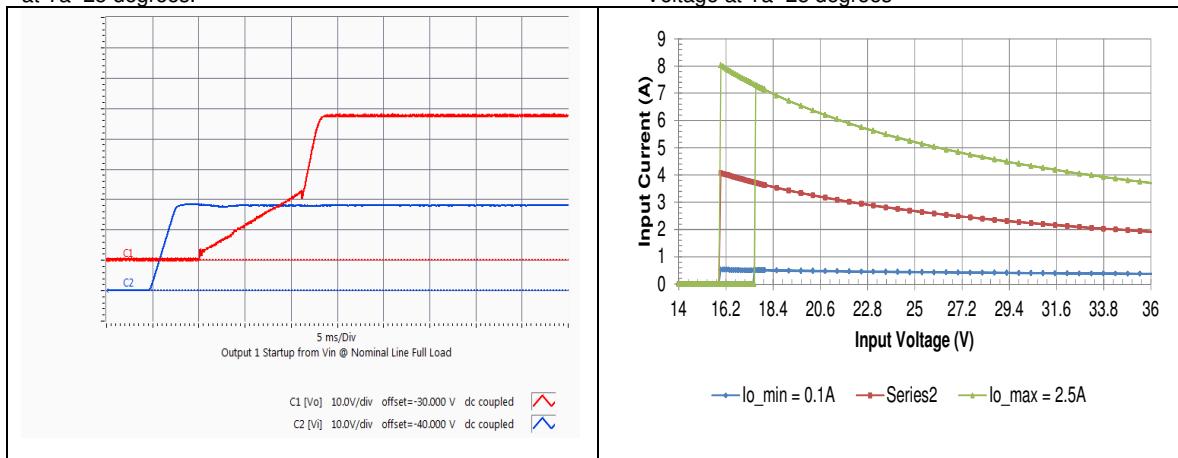

GQA24003A480V Typical startup characteristic from on/off at full load. Blue trace - on/off signal, red trace – output voltage

GQA24003A480V Typical Input Current vs. Input Voltage Characteristics

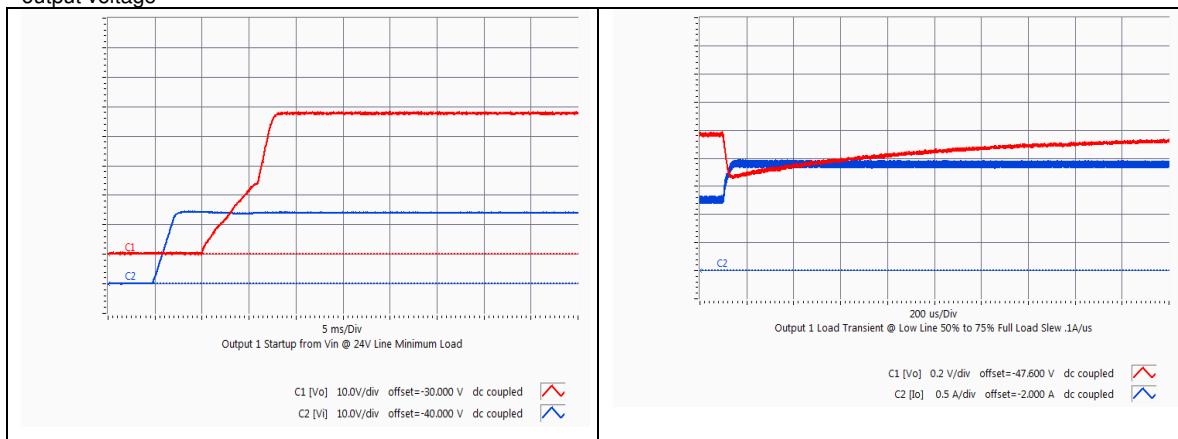


GQA24003A480V Typical startup characteristic from input voltage application at full load. Red trace - output voltage, blue trace –input voltage GQA24003A480V

Typical transient response. Output voltage response to load step from 50% to 75% of full load with output current slew rate of 0.1A/uS.


Electrical Characteristics (continued):

GQA24003A480V: 48V, 2.5A Output

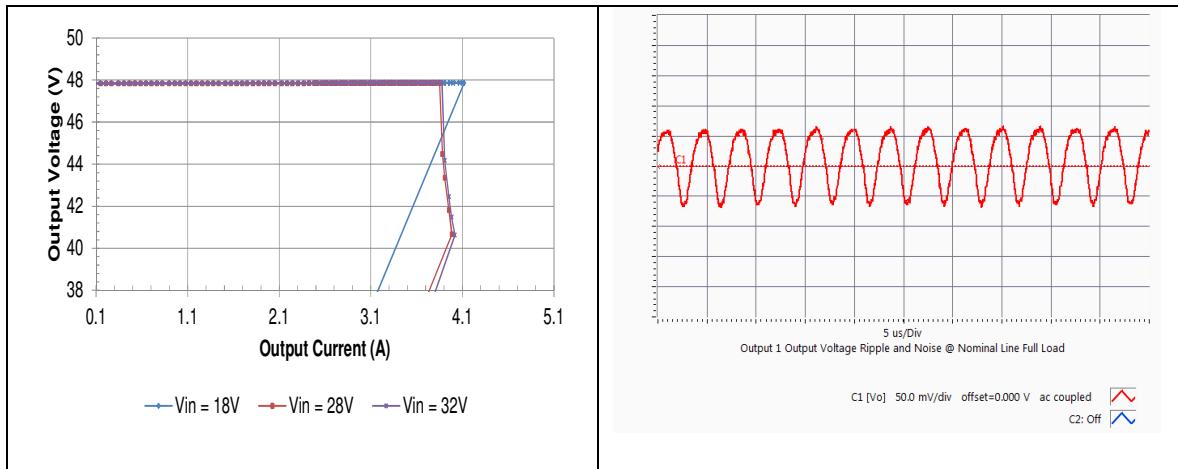

GQA24003A480V Typical Output Current Limit Characteristics vs. Input Voltage at Ta=25 degrees.

GQA24003A480V Typical Output Ripple at nominal Input voltage and full load at Ta=25 degree

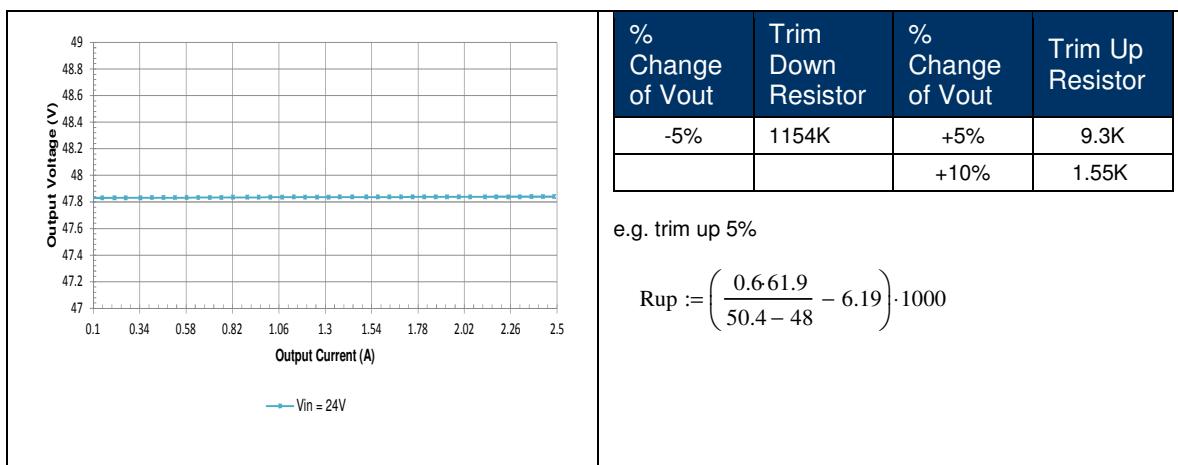


GQA24003A480V Typical Load Regulation Characteristics at Ta=25 degrees.

GQA24003A480V Calculated resistor values for output voltage adjustment


Intentionally blank

Thermal Performance:


GQA24003A480V: 48V, 2.5A Output

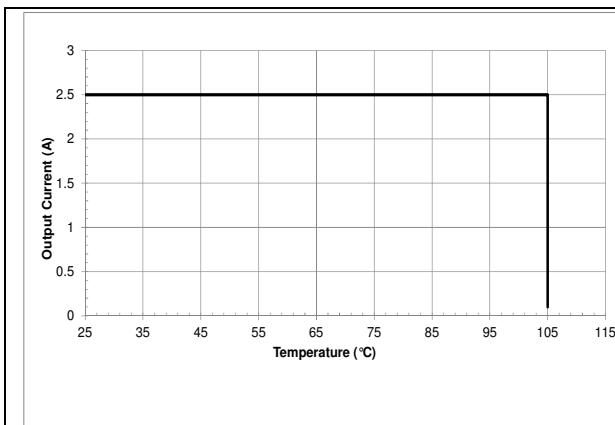


GQA24003A480V maximum output current vs. baseplate temperature

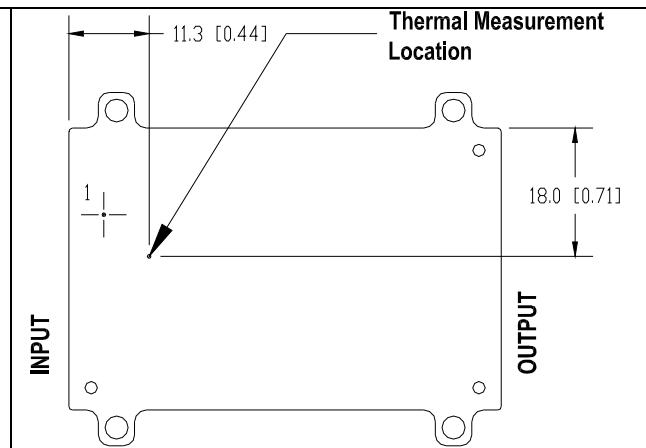

GQA24003A480V thermal measurement location – top view

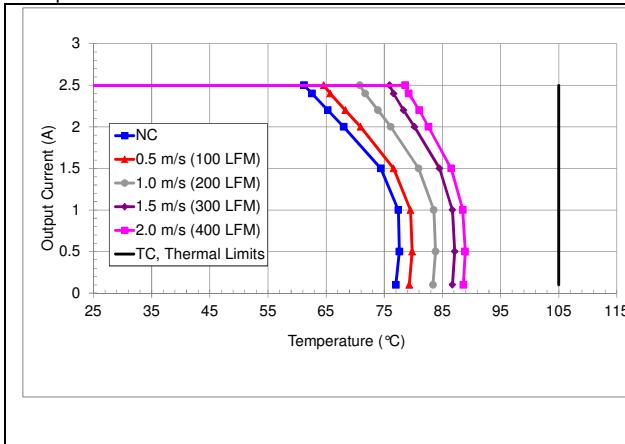

GQA24003A480V maximum output current vs. ambient temperature at 28V input for airflow rates natural convection (60lfm) to 400lfm with airflow from pin 3 to pin 1

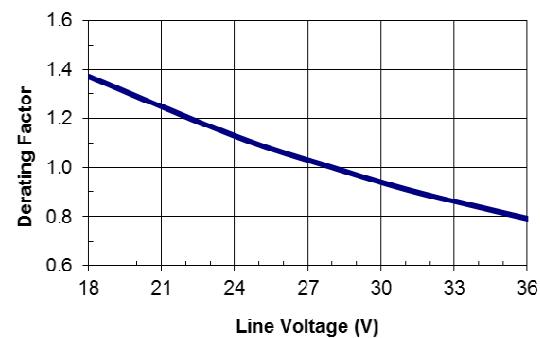

GQA24003A480V typical temperature derating versus input voltage output with 1m/s (200 lfm) airflow from pin 3 to pin 1.

The thermal curves provided are based upon measurements made in TDK Lambda's experimental test setup that is described in the Thermal Management section. Due to the large number of variables in system design, TDK Lambda recommends that the user verify the module's thermal performance in the end application. The critical component should be thermo-coupled and monitored, and should not exceed the temperature limit specified in the derating curve above. It is critical that the thermocouple be mounted in a manner that gives direct thermal contact or significant measurement errors may result. TDK Lambda can provide modules with a thermocouple pre-mounted to the critical component for system verification tests.

Electrical Data:

GQA2W004A280V: 28V, 4.2A Output


Characteristic	Min	Typ	Max	Unit	Notes & Conditions
Output Voltage Initial Setpoint	27.16	28	28.84	Vdc	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$; $T_c = 25^\circ C$
Output Voltage Tolerance	26.88	28	29.12	Vdc	Over all rated input voltage, load, and temperature conditions to end of life
Efficiency	---	89	---	%	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$; $T_c = 25^\circ C$
Line Regulation	---	0.05	---	%	$V_{in}=V_{in,min}$ to $V_{in,max}$
Load Regulation	---	0.03	---	%	$I_{o}=I_{o,min}$ to $I_{o,max}$
Temperature Regulation	---	0.5	---	%	$T_c=T_{c,min}$ to $T_{c,max}$
Output Current	0	---	4.2	A	
Output Current Limiting Threshold	---	5.1	---	A	$V_o = 0.9*V_{o,nom}$, $T_c < T_{c,max}$
Short Circuit Current	---	0.1	---	A	$V_o = 0.25V$, $T_c = 25^\circ C$
Output Ripple and Noise Voltage	---	100	250*	mVpp	Measured across one 22 uF and one 0.1uF ceramic capacitor – see input/output ripple measurement figure; BW = 20MHz
	---	35	---	mVrms	
Output Voltage Adjustment Range	90	---	110	% $V_{o,nom}$	Adjustment range is reduced at input voltages below 12V
Dynamic Response: Recovery Time	---	1	---	mS	$di/dt = 0.1A/uS$, $V_{in}=V_{in,nom}$; load step from 50% to 75% of $I_{o,max}$
Transient Voltage	---	400	---	mV	
Output Voltage Overshoot during startup	---	---	5	%	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$, $T_c=25^\circ C$
Switching Frequency	---	270	---	kHz	Fixed
Output Over Voltage Protection	---	35	---	V	
External Load Capacitance	0	---	1000&	uF	
Isolation Capacitance	---	0.01	---	uF	
Isolation Resistance	10	---	---	MΩ	
R _a		36.5		kΩ	Required for trim calculation
R _b		3.01		kΩ	Required for trim calculation

* Engineering estimate

& Contact TDK-Lambda for applications that require additional capacitance or very low esr


Electrical Characteristics:

GQA2W004A280V: 28V, 4.2A Output

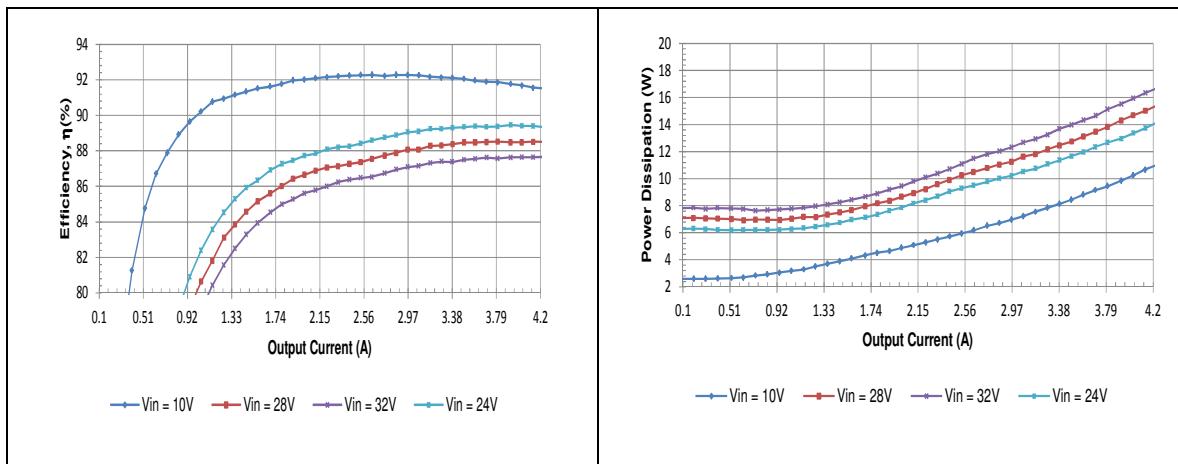


GQA2W004A280V Typical Efficiency vs. Input Voltage at $T_a=25$ degrees.

GQA2W004A280V Typical Power Dissipation vs. Input Voltage at $T_a=25$ degrees

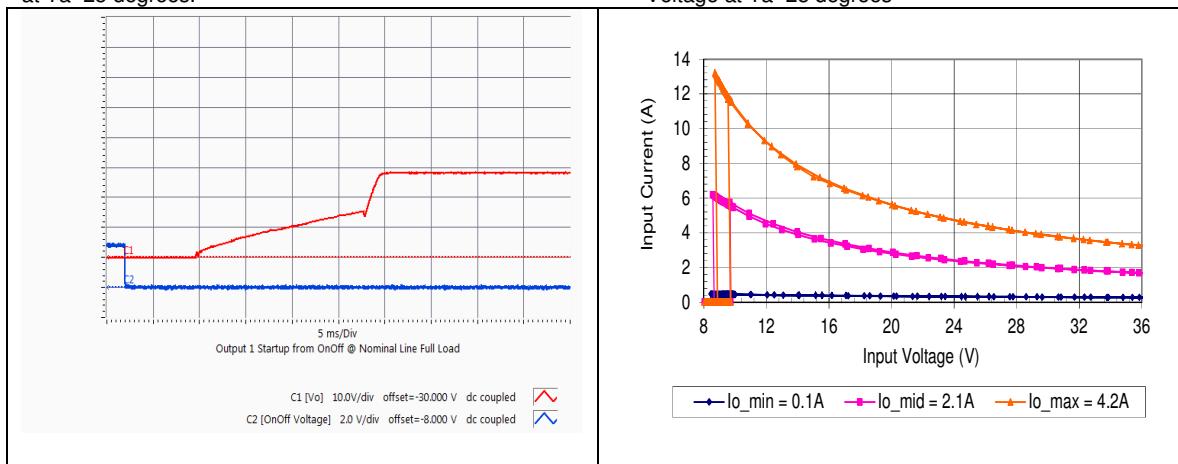

GQA2W004A280V Typical startup characteristic from on/off at full load. Blue trace - on/off signal, red trace – output voltage

GQA2W004A280V Typical Input Current vs. Input Voltage Characteristics

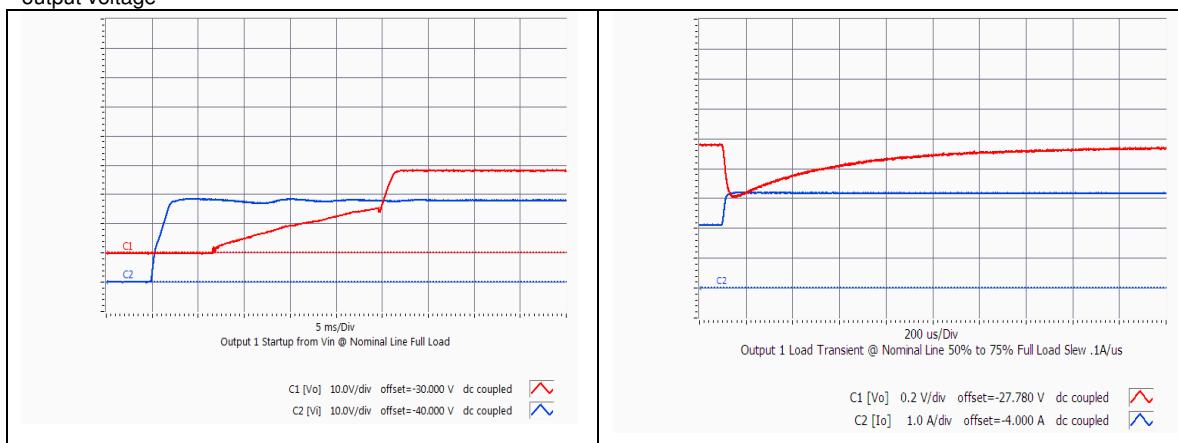


GQA2W004A280V Typical startup characteristic from input voltage application at full load. Red trace - output voltage, blue trace –input voltage

GQA2W004A280V Typical transient response. Output voltage response to load step from 50% to 75% of full load with output current slew rate of 0.1A/uS.


Electrical Characteristics (continued):

GQA2W004A280V: 28V, 4.2A Output

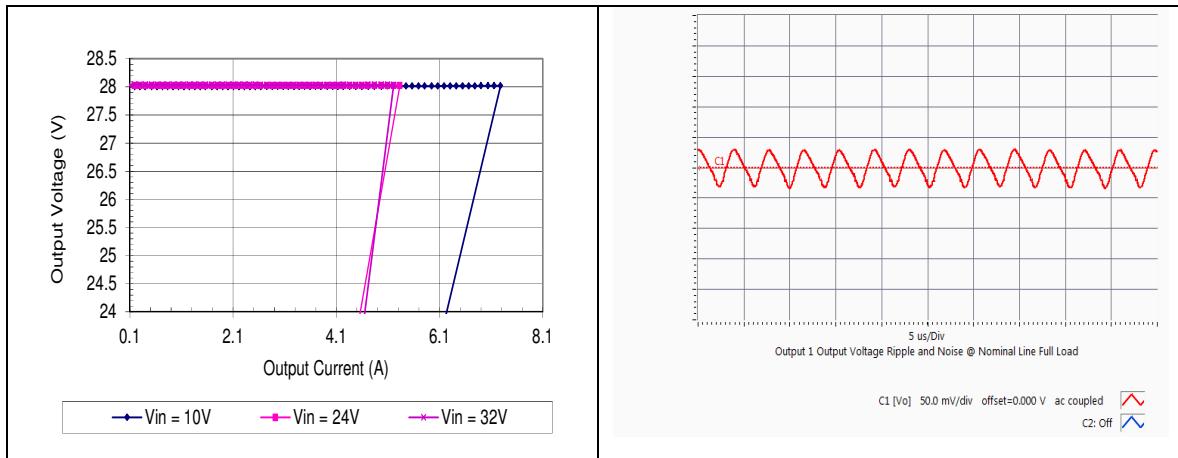

GQA2W004A280V Typical Output Current Limit Characteristics vs. Input Voltage at Ta=25 degrees.

GQA2W004A280V Typical Output Ripple at nominal Input voltage and full load at Ta=25 degree

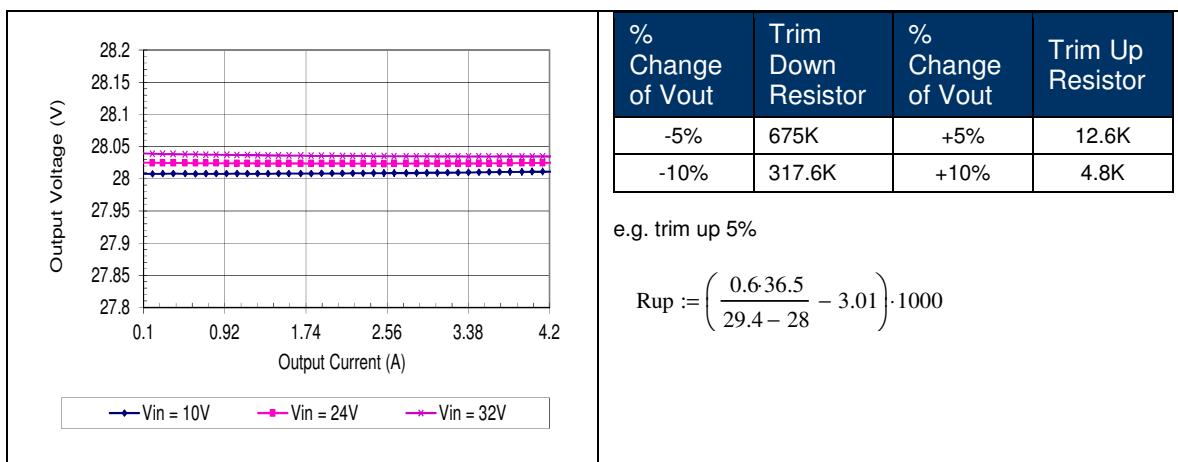


GQA2W004A280V Typical Load Regulation Characteristics at Ta=25 degrees.

GQA2W004A280V Calculated resistor values for output voltage adjustment


Intentionally blank

Thermal Performance:


GQA2W004A280V-007: 28V, 4.28A Output

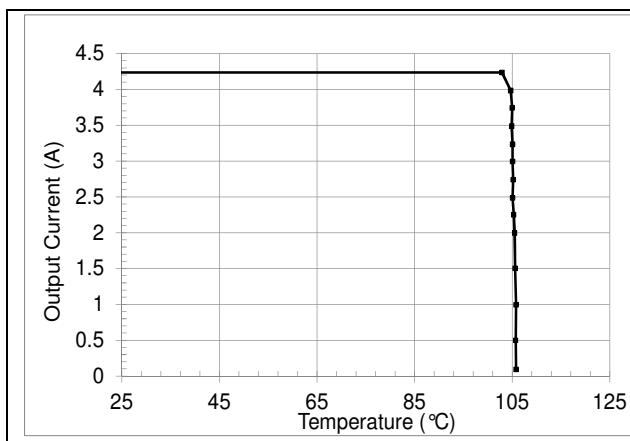


GQA2W004A280V maximum output current vs. baseplate temperature

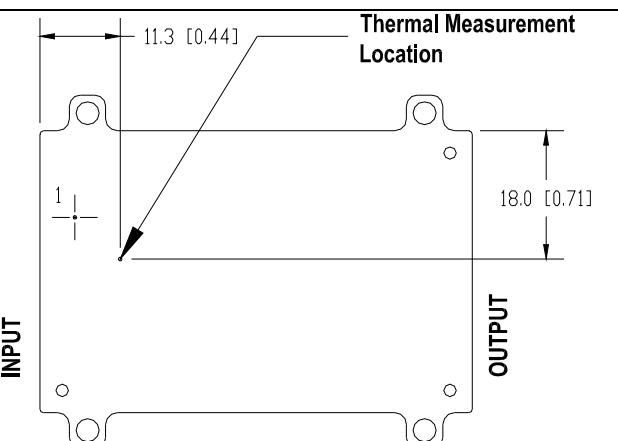

GQA2W004A280V-007 thermal measurement location – top view

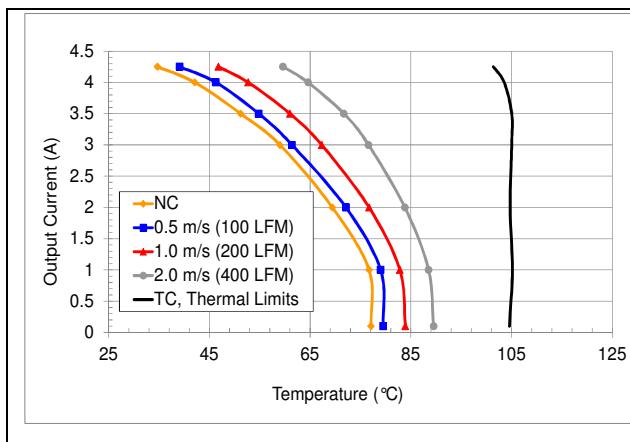

GQA2W004A280V maximum output current vs. ambient temperature at 28V input for airflow rates natural convection (60lfm) to 400lfm with airflow from pin 3 to pin 1

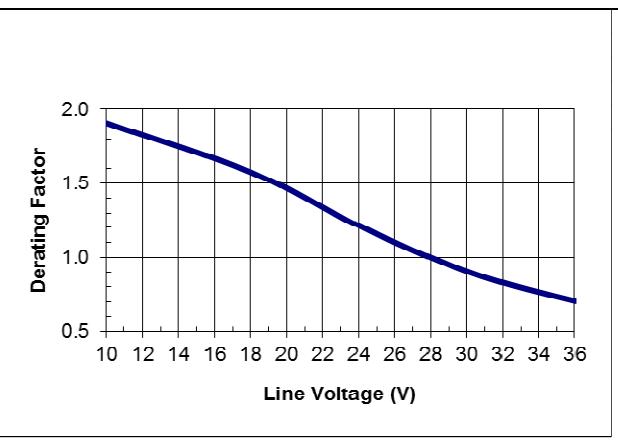

GQA2W004A280V typical temperature derating versus input voltage output with 1m/s (200 lfm) airflow from pin 3 to pin 1.

The thermal curves provided are based upon measurements made in TDK Lambda's experimental test setup that is described in the Thermal Management section. Due to the large number of variables in system design, TDK Lambda recommends that the user verify the module's thermal performance in the end application. The critical component should be thermo-coupled and monitored, and should not exceed the temperature limit specified in the derating curve above. It is critical that the thermocouple be mounted in a manner that gives direct thermal contact or significant measurement errors may result. TDK Lambda can provide modules with a thermocouple pre-mounted to the critical component for system verification tests.

GQA2W005A240V: 24V, 5A Output


Characteristic	Min	Typ	Max	Unit	Notes & Conditions
Output Voltage Initial Setpoint	23.28	24	24.72	Vdc	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$; $T_c = 25^\circ C$
Output Voltage Tolerance	23.04	24	24.96	Vdc	Over all rated input voltage, load, and temperature conditions to end of life
Efficiency	---	87	---	%	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$; $T_c = 25^\circ C$
Line Regulation	---	0.05	---	%	$V_{in}=V_{in,min}$ to $V_{in,max}$
Load Regulation	---	0.03	---	%	$I_{o}=I_{o,min}$ to $I_{o,max}$
Temperature Regulation	---	0.5	---	%	$T_c=T_{c,min}$ to $T_{c,max}$
Output Current	0	---	5	A	
Output Current Limiting Threshold	---	6.2	---	A	$V_o = 0.9 * V_{o,nom}$, $T_c < T_{c,max}$
Short Circuit Current	---	0.1	---	A	$V_o = 0.25V$, $T_c = 25^\circ C$
Output Ripple and Noise Voltage	---	100	250*	mVpp	Measured across one 22 uF and one 0.1uF ceramic capacitor – see input/output ripple measurement figure; BW = 20MHz
	---	35	---	mVrms	
Output Voltage Adjustment Range	90	---	110	% $V_{o,nom}$	Adjustment range is reduced at input voltages below 12V
Dynamic Response: Recovery Time	---	1	---	mS	$di/dt = 0.1A/\mu S$, $V_{in}=V_{in,nom}$; load step from 50% to 75% of $I_{o,max}$
Transient Voltage	---	400	---	mV	
Output Voltage Overshoot during startup	---	---	5	%	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$, $T_c=25^\circ C$
Switching Frequency	---	270	---	kHz	Fixed
Output Over Voltage Protection	---	32	---	V	
External Load Capacitance	0	---	1000&	uF	
Isolation Capacitance	---	0.01	---	uF	
Isolation Resistance	10	---	---	MΩ	
R _a		36.5		kΩ	Required for trim calculation
R _b		3.01		kΩ	Required for trim calculation

* Engineering estimate

& Contact TDK-Lambda for applications that require additional capacitance or very low esr


Electrical Characteristics:

GQA2W005A240V: 24V, 5A Output

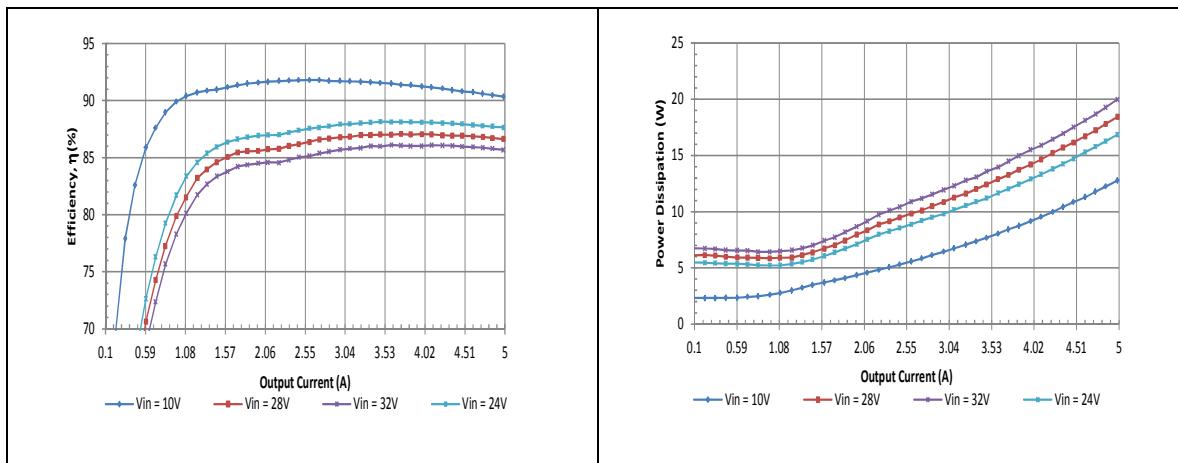


GQA2W005A240V Typical Efficiency vs. Input Voltage at $T_a=25$ degrees.

GQA2W005A240V Typical Power Dissipation vs. Input Voltage at $T_a=25$ degrees

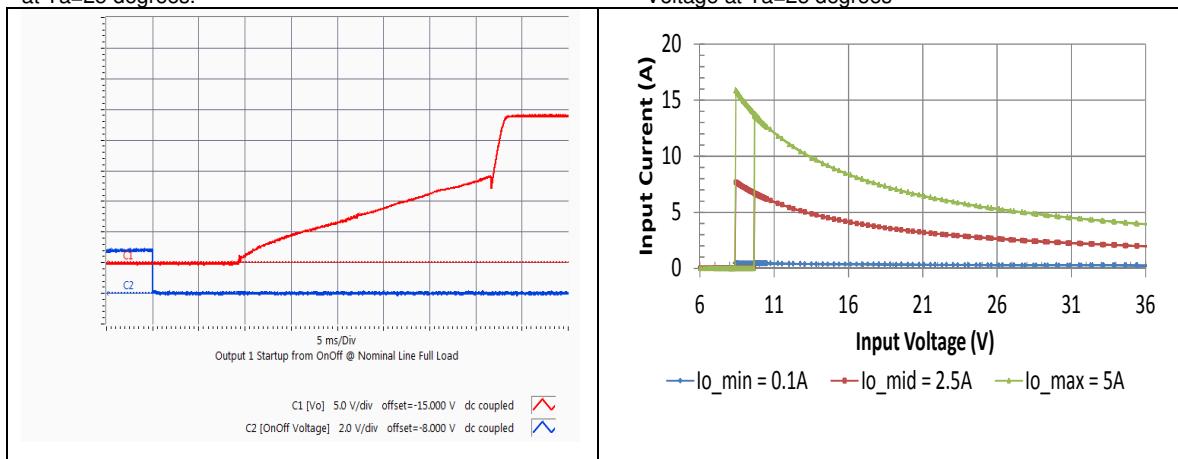

GQA2W005A240V Typical startup characteristic from on/off at full load. Blue trace - on/off signal, red trace – output voltage

GQA2W005A240V Typical Input Current vs. Input Voltage Characteristics

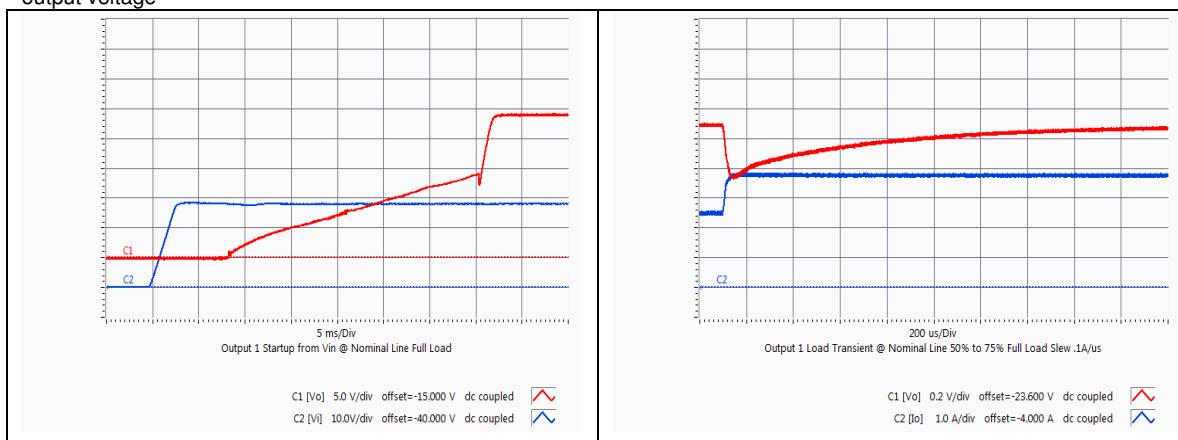


GQA2W005A240V Typical startup characteristic from input voltage application at full load. Red trace - output voltage, blue trace –input voltage

GQA2W005A240V Typical transient response. Output voltage response to load step from 50% to 75% of full load with output current slew rate of 0.1A/uS.


Electrical Characteristics (continued):

GQA2W005A240V: 24V, 5A Output

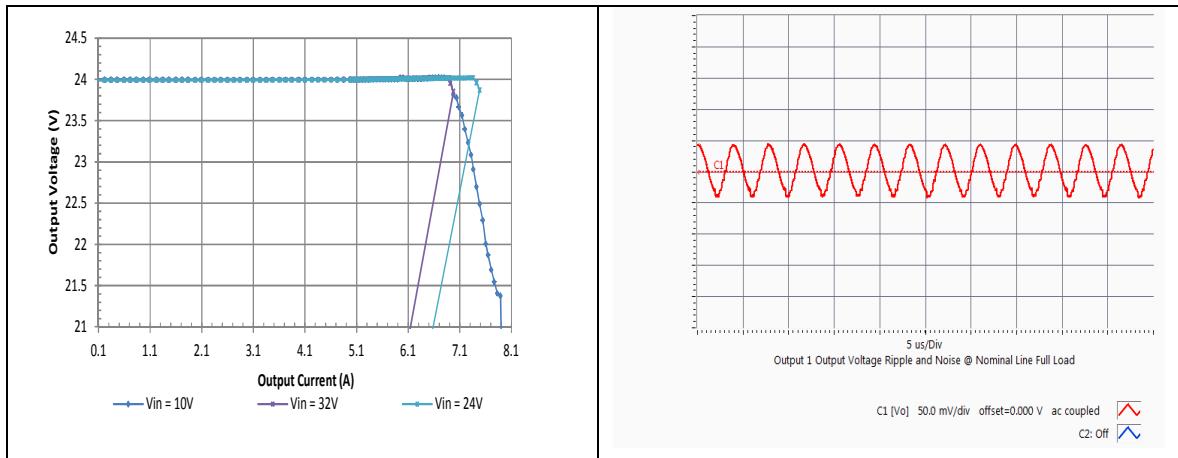


GQA2W005A240V Typical Output Current Limit Characteristics vs. Input Voltage at Ta=25 degrees.

GQA2W005A240V Typical Output Ripple at nominal Input voltage and full load at Ta=25 degree

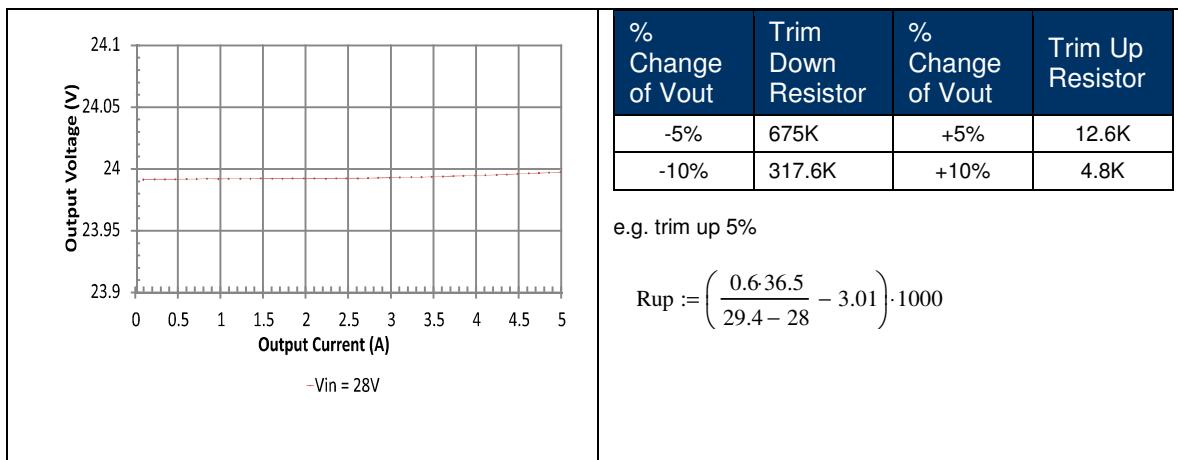


GQA2W005A240V Typical Load Regulation Characteristics at Ta=25 degrees.

GQA2W004A280V Calculated resistor values for output voltage adjustment

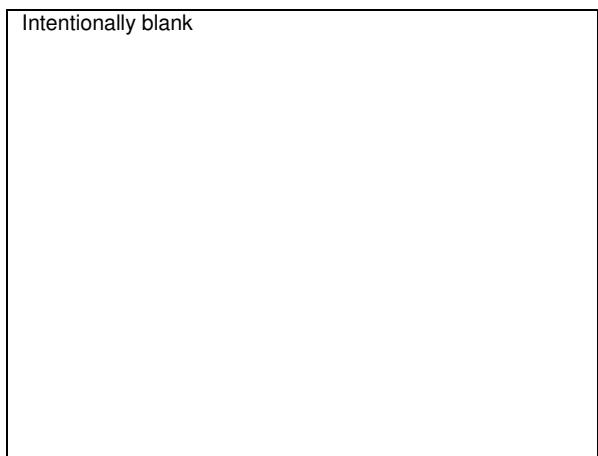


Thermal Performance:


GQA2W005A240V: 24V, 5A Output

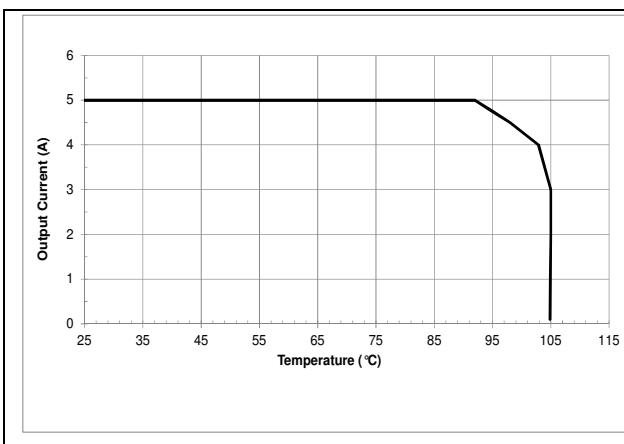


GQA2W005A240V maximum output current vs. baseplate temperature at nominal line

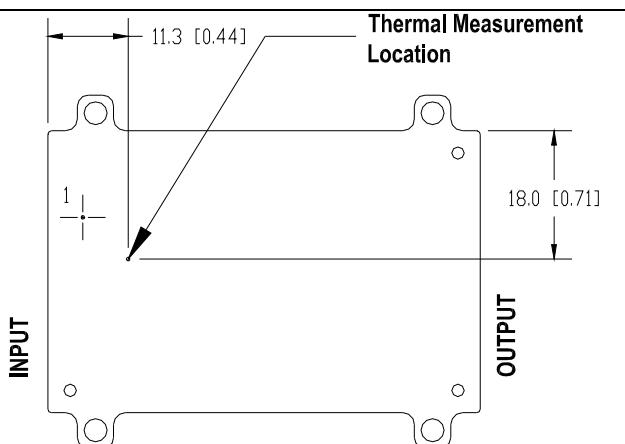

GQA2W005A240V-007 thermal measurement location – top view

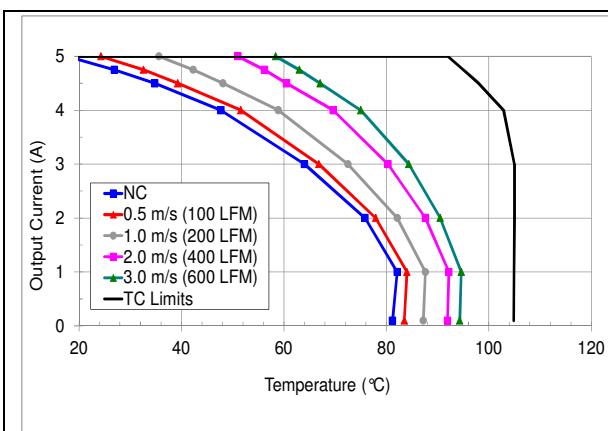

GQA2W005A240V maximum output current vs. ambient temperature at 28V input for airflow rates natural convection (60lfm) to 600lfm with airflow from pin 3 to pin 1

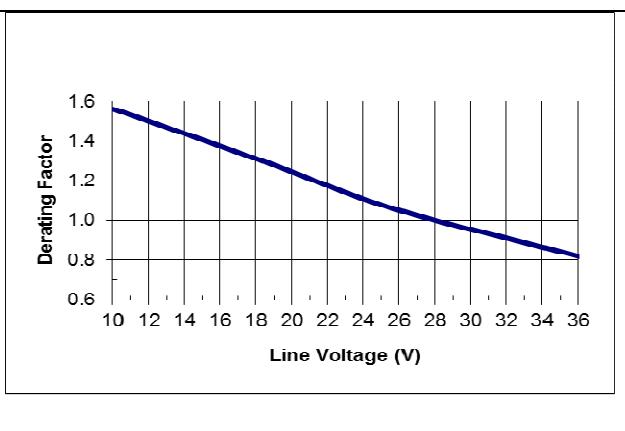

GQA2W005A240V typical temperature derating versus input voltage output with 2m/s (400 lfm) airflow from pin 3 to pin 1.

The thermal curves provided are based upon measurements made in TDK Lambda's experimental test setup that is described in the Thermal Management section. Due to the large number of variables in system design, TDK Lambda recommends that the user verify the module's thermal performance in the end application. The critical component should be thermo-coupled and monitored, and should not exceed the temperature limit specified in the derating curve above. It is critical that the thermocouple be mounted in a manner that gives direct thermal contact or significant measurement errors may result. TDK Lambda can provide modules with a thermocouple pre-mounted to the critical component for system verification tests.

Electrical Data:

GQA2W008A150V: 15V, 8A Output


Characteristic	Min	Typ	Max	Unit	Notes & Conditions
Output Voltage Initial Setpoint	14.55	15	15.45	Vdc	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$; $T_c = 25^\circ C$
Output Voltage Tolerance	14.4	15	15.6	Vdc	Over all rated input voltage, load, and temperature conditions to end of life
Efficiency	---	89	---	%	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$; $T_c = 25^\circ C$
Line Regulation	---	0.05	---	%	$V_{in}=V_{in,min}$ to $V_{in,max}$
Load Regulation	---	0.03	---	%	$I_{o}=I_{o,min}$ to $I_{o,max}$
Temperature Regulation	---	0.5	---	%	$T_c=T_{c,min}$ to T_c,max
Output Current	0	---	8	A	At loads less than $I_{o,min}$ the module will continue to regulate the output voltage, but the output ripple may increase
Output Current Limiting Threshold	---	12	---	A	$V_o = 0.9 \cdot V_{o,nom}$, $T_c < T_{c,max}$
Short Circuit Current	---	0.1	---	A	$V_o = 0.25V$, $T_c = 25^\circ C$
Output Ripple and Noise Voltage	---	80	200*	mVpp	Measured across one 22 uF and one 0.1uF ceramic capacitor – see input/output ripple measurement figure; BW = 20MHz
	---	10	---	mVrms	
Output Voltage Adjustment Range	90	---	110	% $V_{o,nom}$	Adjustment range is reduced at input voltages below 12V
Output Voltage Sense Range	---	---	10	% $V_{o,nom}$	
Dynamic Response: Recovery Time	---	0.6	---	mS	$di/dt = 0.1A/uS$, $V_{in}=V_{in,nom}$; load step from 50% to 75% of $I_{o,max}$
Transient Voltage	---	350*	---	mV	
Output Voltage Overshoot during startup	---	---	5	%	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$, $T_c=25^\circ C$
Switching Frequency	---	270	---	kHz	Fixed
Output Over Voltage Protection	---	18	---	V	
External Load Capacitance	0	---	1500&	uF	
Isolation Capacitance	---	0.01	---	uF	
Isolation Resistance	10	---	---	MΩ	
R _a		36.5		KΩ	Required for trim calculation
R _b		10		KΩ	Required for trim calculation

* Engineering estimate

& Contact TDK-Lambda for applications that require additional capacitance or very low esr


Electrical Characteristics:

GQA2W008A150V: 15V, 8A Output

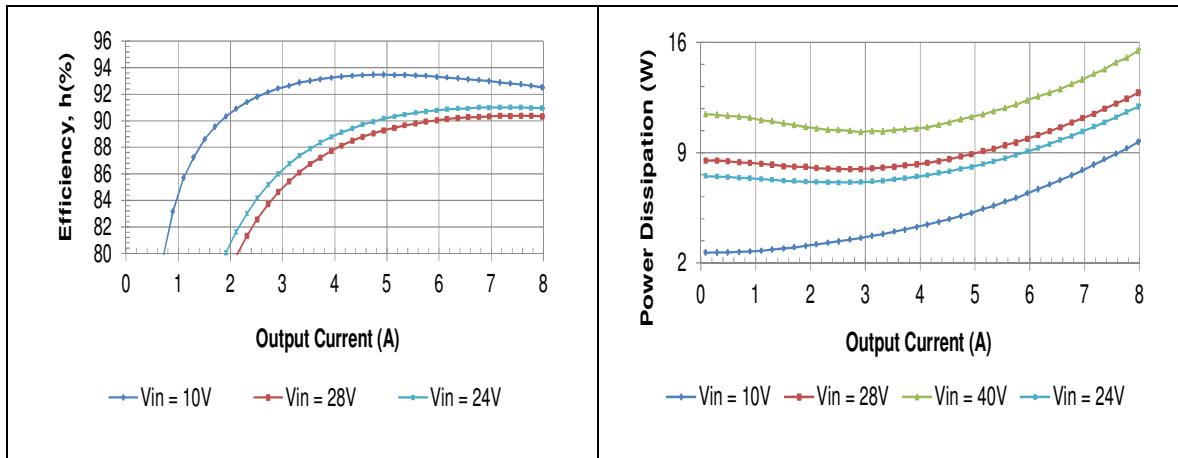


GQA2W008A150V Typical Efficiency vs. Input Voltage at $T_a=25$ degrees.

GQA2W008A150V Typical Power Dissipation vs. Input Voltage at $T_a=25$ degrees

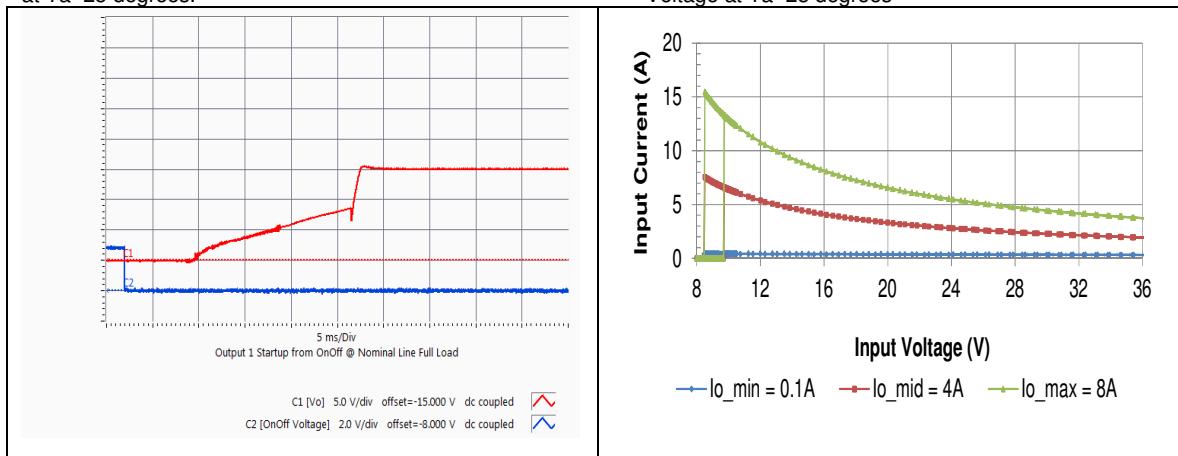

GQA2W008A150V Typical startup characteristic from on/off at full load. Lower trace - on/off signal, upper trace – output voltage

GQA2W008A150V Typical Input Current vs. Input Voltage Characteristics


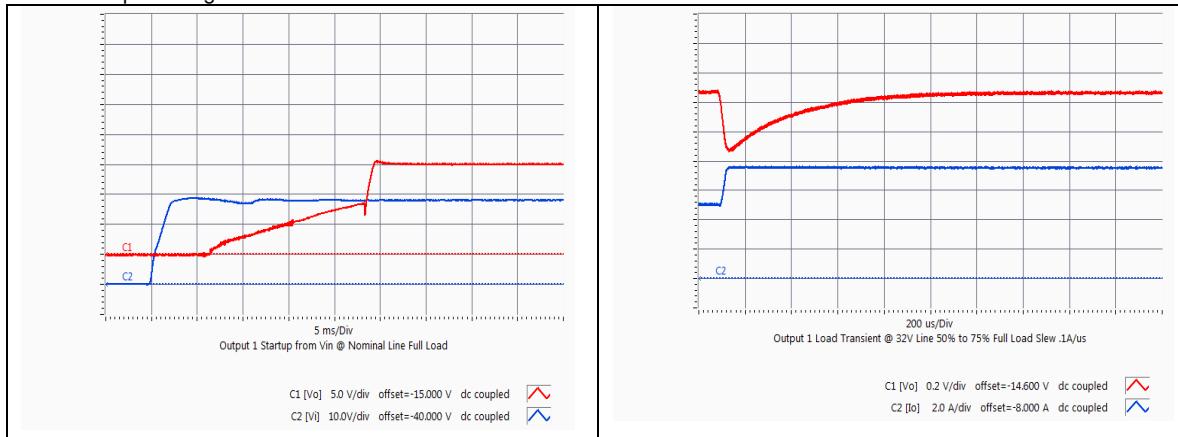


GQA2W008A150V Typical startup characteristic from input voltage application at full load. Red trace - output voltage, Blue trace –input voltage

GQA2W008A150V Typical output voltage response to load step from 50% to 75% of full load with output current slew rate of 0.1A/uS and $C_{ext} = 10\mu F$

Electrical Characteristics (continued):


GQA2W008A150V: 15V, 8A Output

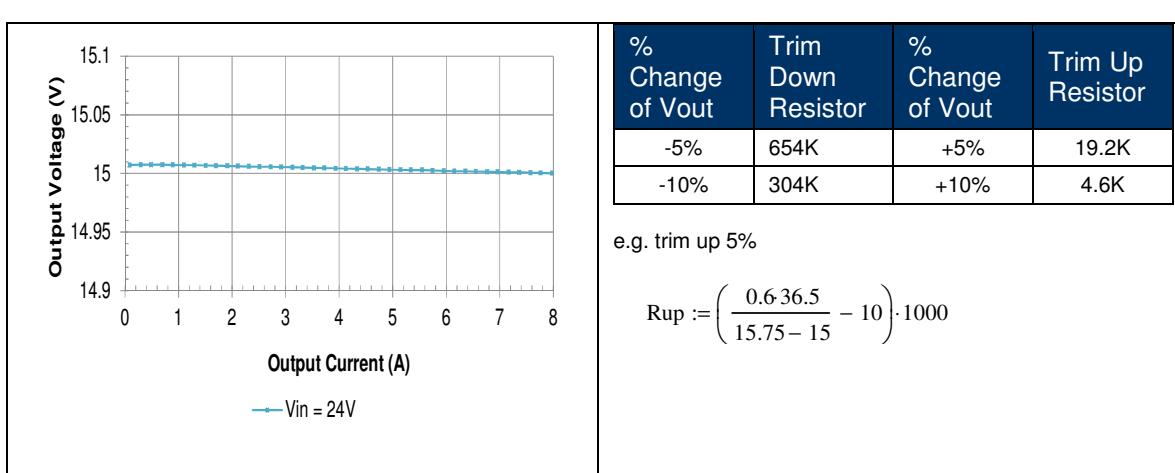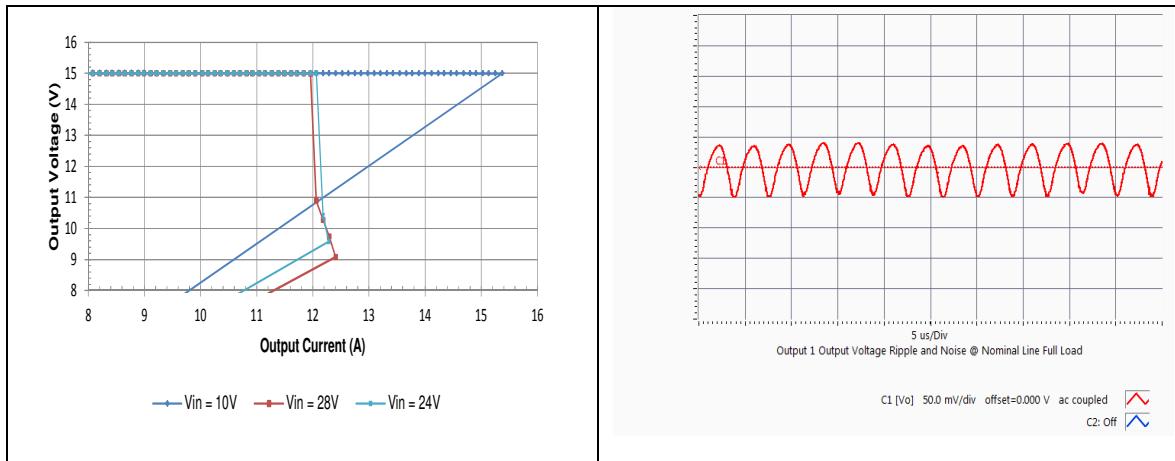


Intentionally blank

Thermal Performance:


GQA2W008A150V: 15V, 8A Output

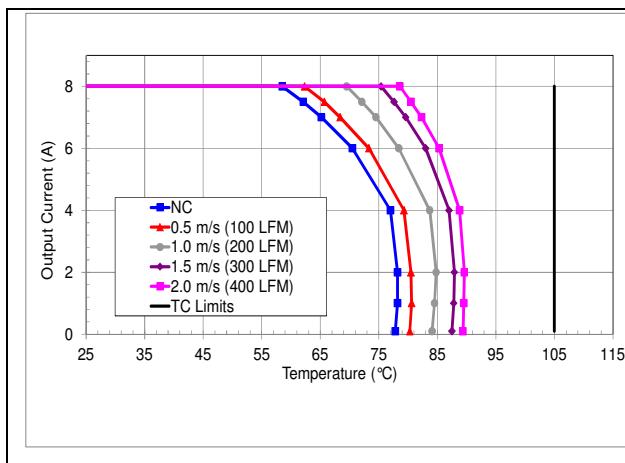


GQA2W008A150V maximum output current vs. ambient temperature at 28V input for airflow rates natural convection (60lfm) to 400lfm with airflow from pin 3 to pin 1

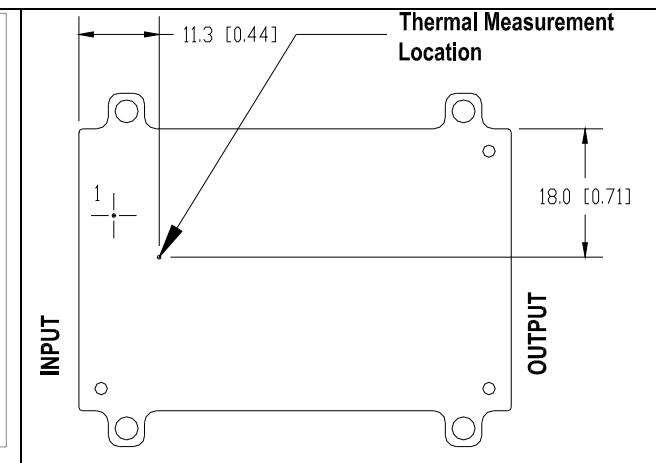

GQA2W008A150V thermal measurement location – top view

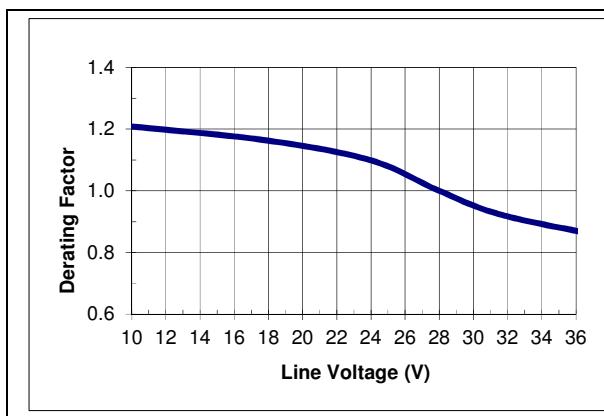

GQA2W008A150V typical temperature derating versus input voltage output with 1m/s (200 lfm) airflow from pin 3 to pin 1.

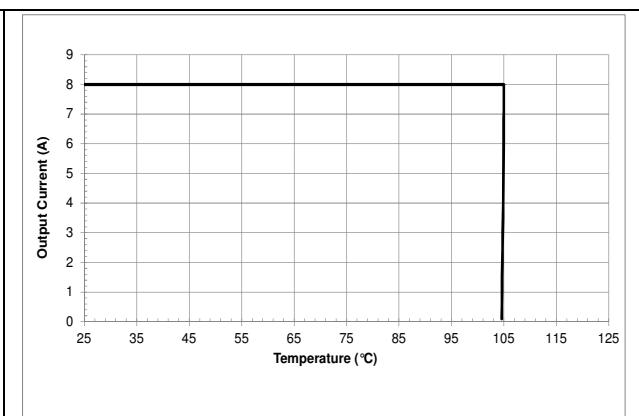

GQA2W008A150V maximum output current vs. baseplate temperature at nominal line

The thermal curves provided are based upon measurements made in TDK Lambda's experimental test setup that is described in the Thermal Management section. Due to the large number of variables in system design, TDK Lambda recommends that the user verify the module's thermal performance in the end application. The critical component should be thermo coupled and monitored, and should not exceed the temperature limit specified in the derating curve above. It is critical that the thermocouple be mounted in a manner that gives direct thermal contact or significant measurement errors may result. TDK Lambda can provide modules with a thermocouple pre-mounted to the critical component for system verification tests.

Electrical Data:
GQA2W010A120V: 12V, 10A Output


Characteristic	Min	Typ	Max	Unit	Notes & Conditions
Output Voltage Initial Setpoint	11.64	12	12.36	Vdc	$V_{in}=V_{in,nom}$; $I_o=I_{o,max}$; $T_c = 25^\circ C$
Output Voltage Tolerance	11.54	12	12.48	Vdc	Over all rated input voltage, load, and temperature conditions to end of life
Efficiency	---	89	---	%	$V_{in}=V_{in,nom}$; $I_o=I_{o,max}$; $T_c = 25^\circ C$
Line Regulation	---	0.05	---	%	$V_{in}=V_{in,min}$ to $V_{in,max}$
Load Regulation	---	0.03	---	%	$I_o=I_{o,min}$ to $I_{o,max}$
Temperature Regulation	---	0.5	---	%	$T_c=T_{c,min}$ to $T_{c,max}$
Output Current	0	---	10	A	At loads less than $I_{o,min}$ the module will continue to regulate the output voltage, but the output ripple may increase
Output Current Limiting Threshold	---	14.5	---	A	$V_o = 0.9 \cdot V_{o,nom}$, $T_c < T_{c,max}$
Short Circuit Current	---	0.1	---	A	$V_o = 0.25V$, $T_c = 25^\circ C$
Output Ripple and Noise Voltage	---	40	180*	mVpp	Measured across one 22 uF and one 0.1uF ceramic capacitor – see input/output ripple measurement figure; BW = 20MHz
	---	10	---	mVrms	
Output Voltage Adjustment Range	90	---	110	% $V_{o,nom}$	Adjustment range is reduced at input voltages below 12V
Output Voltage Sense Range	---	---	10	% $V_{o,nom}$	
Dynamic Response: Recovery Time	---	0.8	---	mS	$di/dt = 0.1A/uS$, $V_{in}=V_{in,nom}$; load step from 50% to 75% of $I_{o,max}$
Transient Voltage	---	120*	---	mV	
Output Voltage Overshoot during startup	---	---	5	%	$V_{in}=V_{in,nom}$; $I_o=I_{o,max}$, $T_c=25^\circ C$
Switching Frequency	---	270	---	kHz	Fixed
Output Over Voltage Protection	---	15	---	V	
External Load Capacitance	0	---	1800&	uF	
Isolation Capacitance	---	0.01	---	uF	
Isolation Resistance	10	---	---	MΩ	
R _a		36.5		KΩ	Required for trim calculation
R _b		10		KΩ	Required for trim calculation

* Engineering estimate

& Contact TDK-Lambda for applications that require additional capacitance or very low esr


Electrical Characteristics:

GQA2W010A120V: 12V, 10A Output

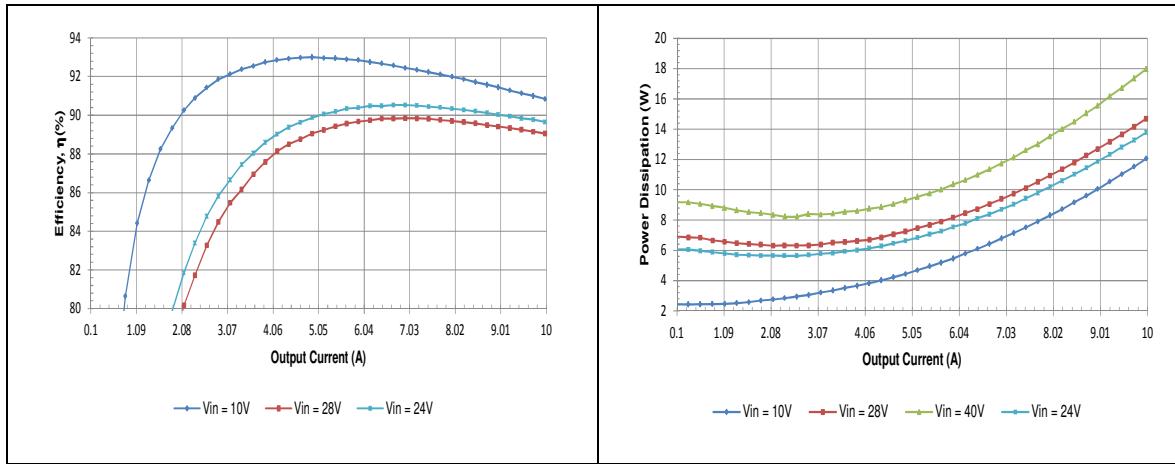


GQA2W010A120V Typical Efficiency vs. Input Voltage at $T_a=25$ degrees.

GQA2W010A120V Typical Power Dissipation vs. Input Voltage at $T_a=25$ degrees

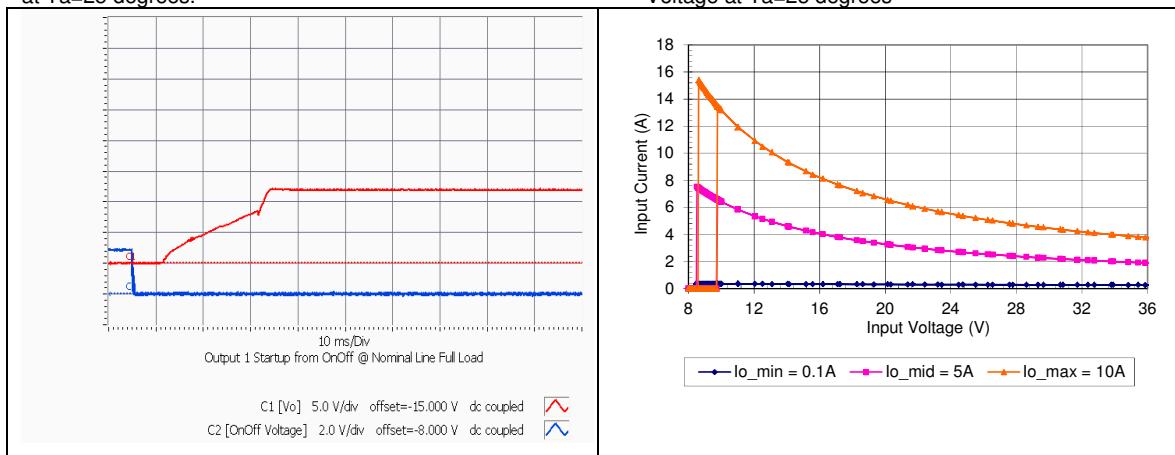

GQA2W010A120V Typical startup characteristic from on/off at full load. Lower trace - on/off signal, upper trace – output voltage

GQA2W010A120V Typical Input Current vs. Input Voltage Characteristics

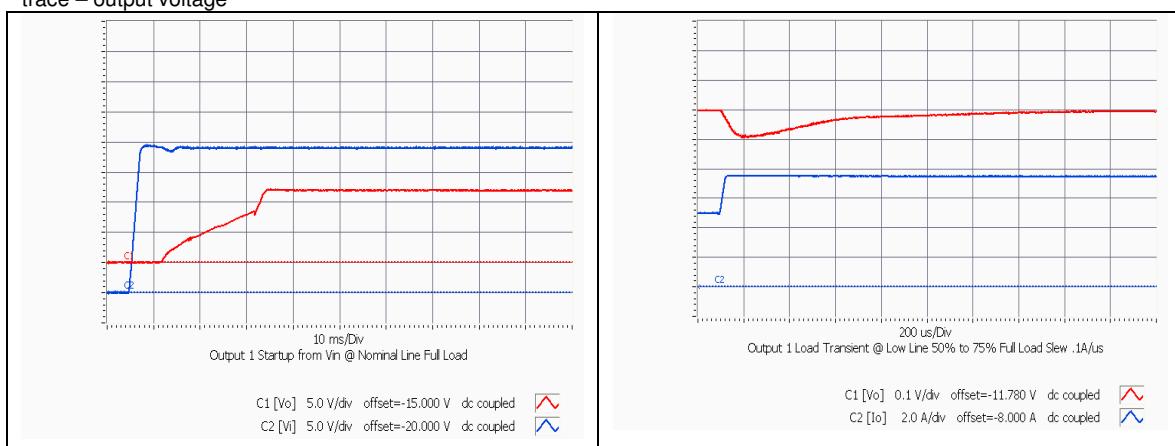


GQA2W010A120V Typical startup characteristic from input voltage application at full load. Red trace - output voltage, Blue trace –input voltage

GQA2W010A120V Typical output voltage response to load step from 50% to 75% of full load with output current slew rate of 0.1A/uS and $C_{ext} = 500\mu F$


Electrical Characteristics (continued):

GQA2W010A120V: 12V, 10A Output

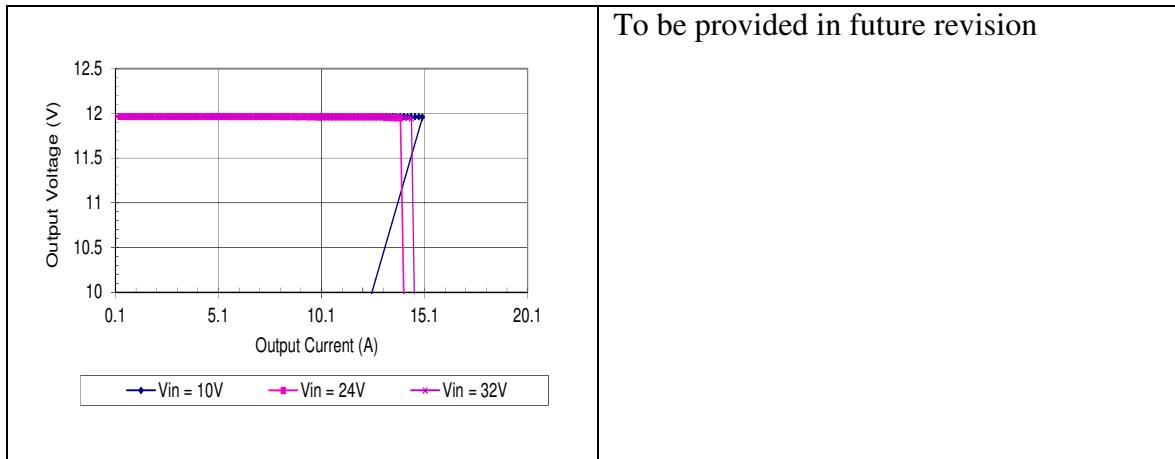

GQA2W010A120V Typical Output Current Limit Characteristics vs. Input Voltage at Ta=25 degrees.

To be provided in future revision

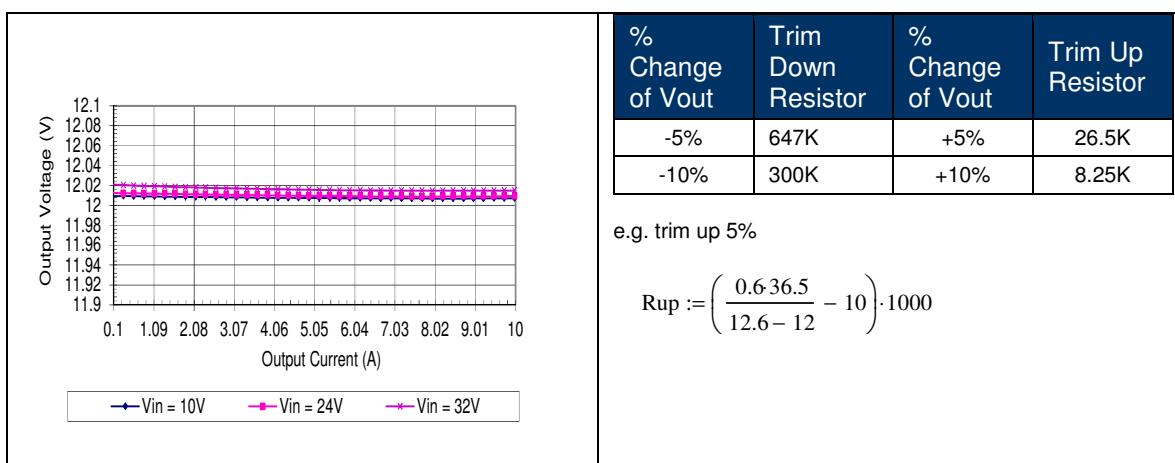


GQA2W010A120V Typical Load Regulation Characteristics at Ta=25 degrees.

% Change of Vout	Trim Down Resistor	% Change of Vout	Trim Up Resistor
-5%	647K	+5%	26.5K
-10%	300K	+10%	8.25K

e.g. trim up 5%


$$R_{up} := \left(\frac{0.6 \cdot 36.5}{12.6 - 12} - 10 \right) \cdot 1000$$

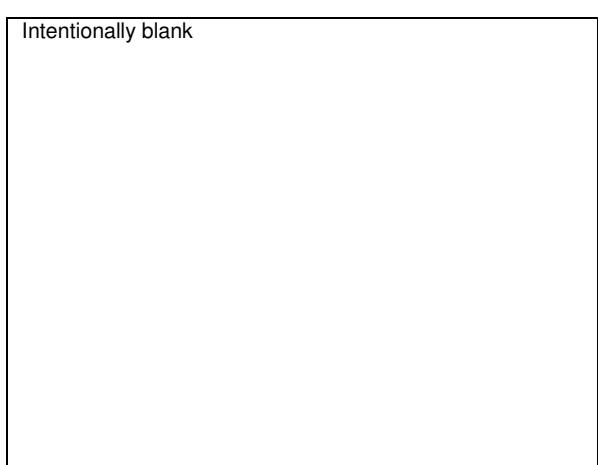

GQA2W010A120V Calculated resistor values for output voltage adjustment


Thermal Performance:

GQA2W010A120V-007: 12V, 10A Output

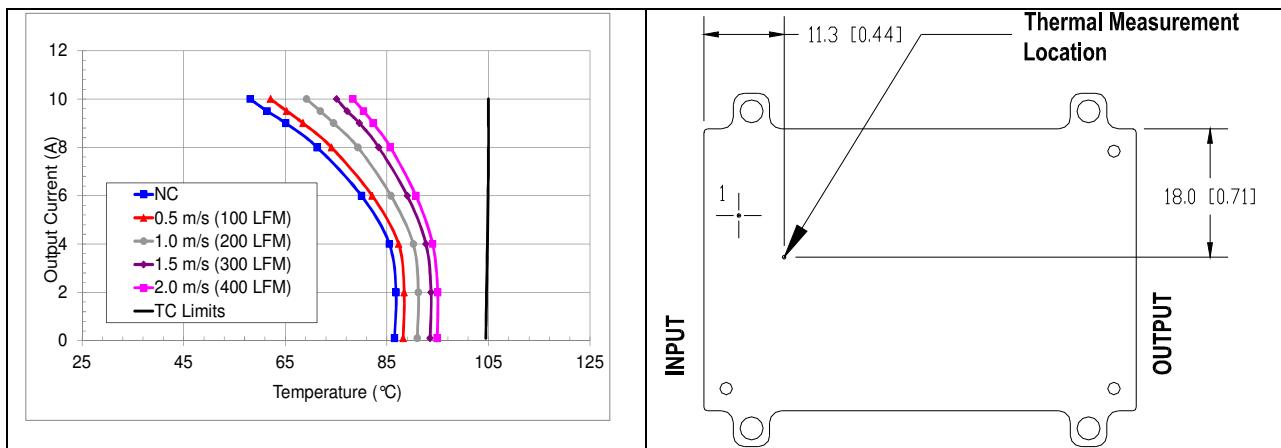

GQA2W010A120V maximum output current vs. ambient temperature at 24V input for airflow rates natural convection (60lfm) to 400lfm with airflow from pin 3 to pin 1

GQA2W010A120V thermal measurement location – top view

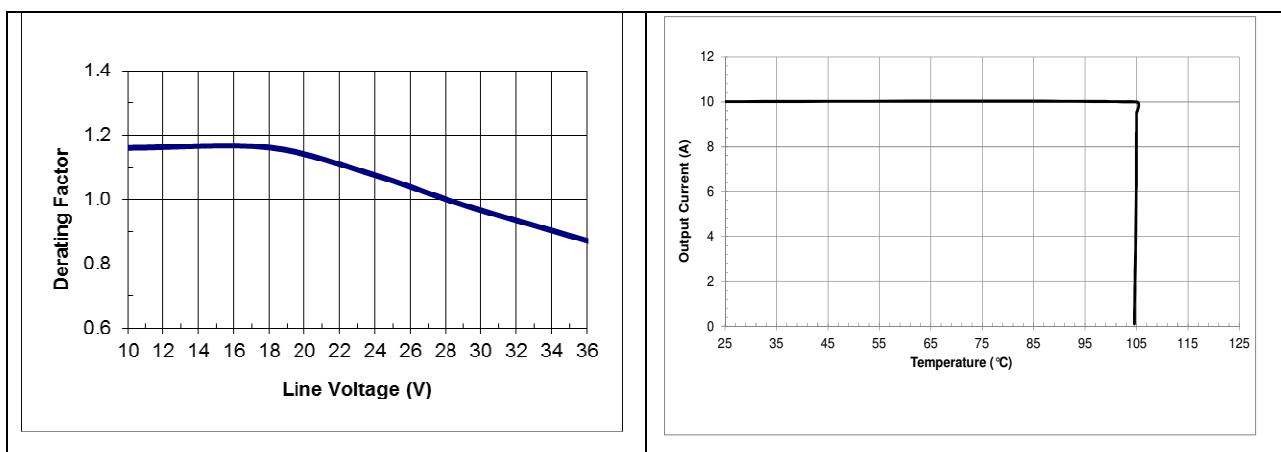

GQA2W010A120V typical temperature derating versus input voltage output with 2m/s (400 lfm) airflow from pin 3 to pin 1.

GQA2W010A120V maximum output current vs. baseplate temperature at nominal line

The thermal curves provided are based upon measurements made in TDK Lambda's experimental test setup that is described in the Thermal Management section. Due to the large number of variables in system design, TDK Lambda recommends that the user verify the module's thermal performance in the end application. The critical component should be thermo coupled and monitored, and should not exceed the temperature limit specified in the derating curve above. It is critical that the thermocouple be mounted in a manner that gives direct thermal contact or significant measurement errors may result. TDK Lambda can provide modules with a thermocouple pre-mounted to the critical component for system verification tests.

Electrical Data:
GQA2W024A050V-007: 5V, 24A Output


Characteristic	Min	Typ	Max	Unit	Notes & Conditions
Output Voltage Initial Setpoint	4.85	5	5.15	Vdc	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$; $T_c = 25^\circ C$
Output Voltage Tolerance	4.8	5	5.2	Vdc	Over all rated input voltage, load, and temperature conditions to end of life
Efficiency	---	90	---	%	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$; $T_c = 25^\circ C$
Line Regulation	---	0.05	---	%	$V_{in}=V_{in,min}$ to $V_{in,max}$
Load Regulation	---	0.03	---	%	$I_{o}=I_{o,min}$ to $I_{o,max}$
Temperature Regulation	---	0.5	---	%	$T_c=T_{c,min}$ to $T_{c,max}$
Output Current	0.1	---	24	A	At loads less than $I_{o,min}$ the module will continue to regulate the output voltage, but the output ripple may increase
Output Current Limiting Threshold	---	37	---	A	$V_o = 0.9 \cdot V_{o,nom}$, $T_c < T_{c,max}$
Short Circuit Current	---	0.3	---	A	$V_o = 0.25V$, $T_c = 25^\circ C$
Output Ripple and Noise Voltage	---	40	150*	mVpp	Measured across one 22 uF and one 0.1uF ceramic capacitor – see input/output ripple measurement figure; BW = 20MHz
	---	15	---	mVrms	
Output Voltage Adjustment Range	90	---	110	% $V_{o,nom}$	Adjustment range is reduced at input voltages below 12V
Output Voltage Sense Range	---	---	10	% $V_{o,nom}$	
Dynamic Response: Recovery Time	---	0.8	---	mS	$di/dt = 0.1A/\mu S$, $V_{in}=V_{in,nom}$; load step from 50% to 75% of $I_{o,max}$
	---	120*	---	mV	
Output Voltage Overshoot during startup	---	---	5	%	$V_{in}=V_{in,nom}$; $I_{o}=I_{o,max}$, $T_c=25^\circ C$
Switching Frequency	---	270	---	kHz	Fixed
Output Over Voltage Protection	---	6.5	---	V	
External Load Capacitance	47	---	2400&	uF	
Isolation Capacitance	---	0.01	---	uF	
Isolation Resistance	10	---	---	MΩ	
R _a		10		KΩ	Required for trim calculation
R _b		4.22		KΩ	Required for trim calculation

* Engineering estimate

& Contact TDK-Lambda for applications that require additional capacitance or very low esr


Electrical Characteristics:

GQA2W024A050V-007: 5V, 24A Output

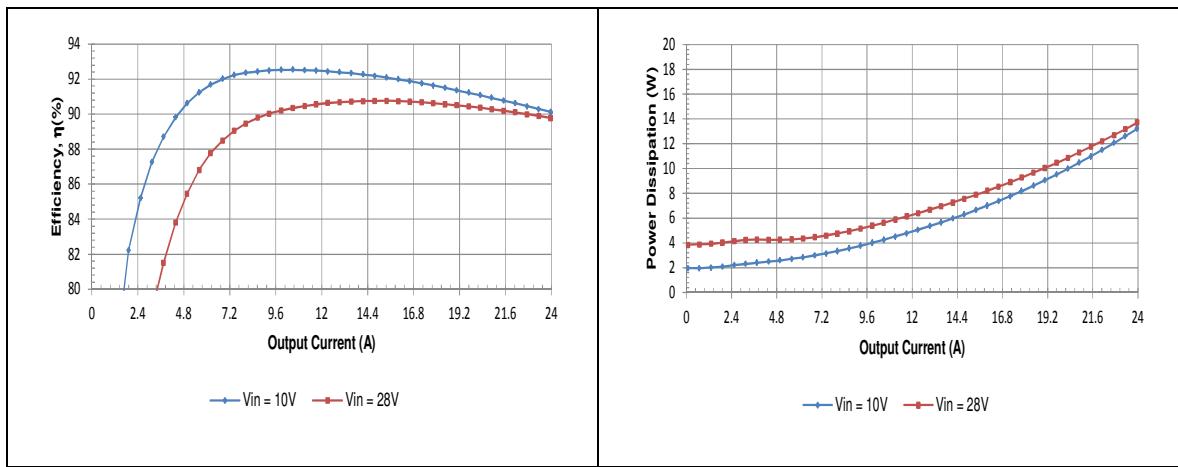


GQA2W024A050V Typical Efficiency vs. Input Voltage at $T_a=25$ degrees.

GQA2W024A050V Typical Power Dissipation vs. Input Voltage at $T_a=25$ degrees

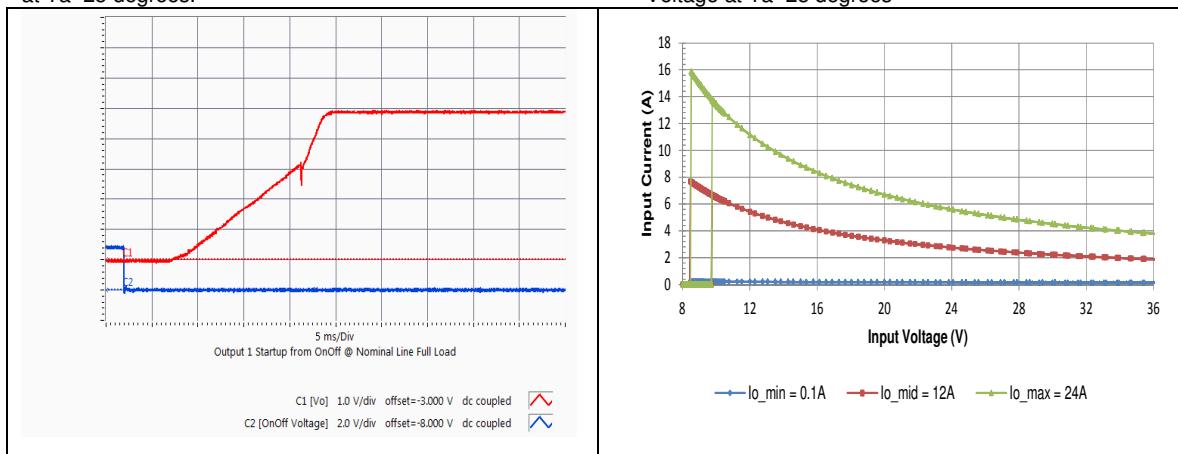

GQA2W024A050V Typical startup characteristic from on/off at full load. Lower trace - on/off signal, upper trace – output voltage

GQA2W024A050V Typical Input Current vs. Input Voltage Characteristics

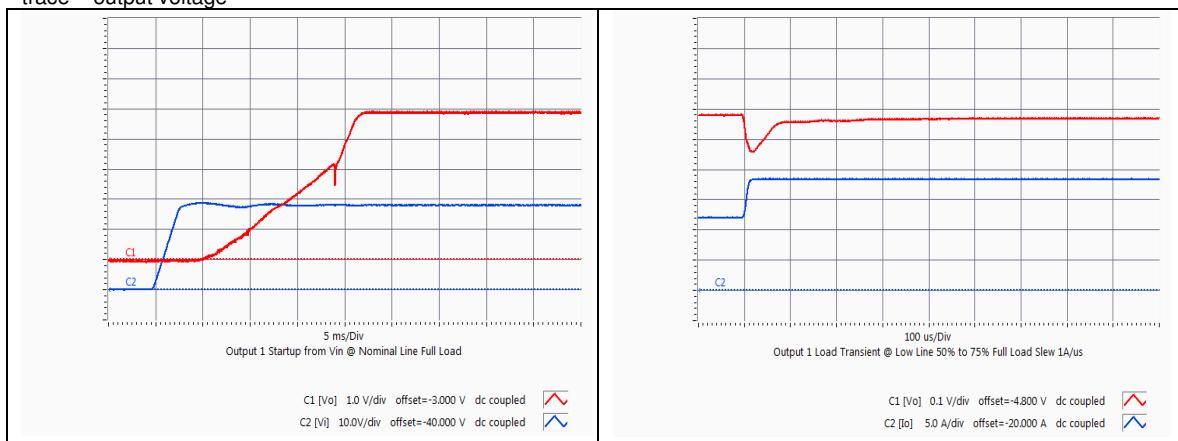


GQA2W024A050V Typical startup characteristic from input voltage application at full load. Red trace - output voltage, Blue trace –input voltage

GQA2W024A050V Typical output voltage response to load step from 50% to 75% of full load with output current slew rate of 1A/uS and $C_{ext} = 22\mu F$

Advance Data Sheet: GQA Power Module – Single Output Quarter Brick


Electrical Characteristics (continued):

GQA2W024A050V-007: 5V, 24A Output

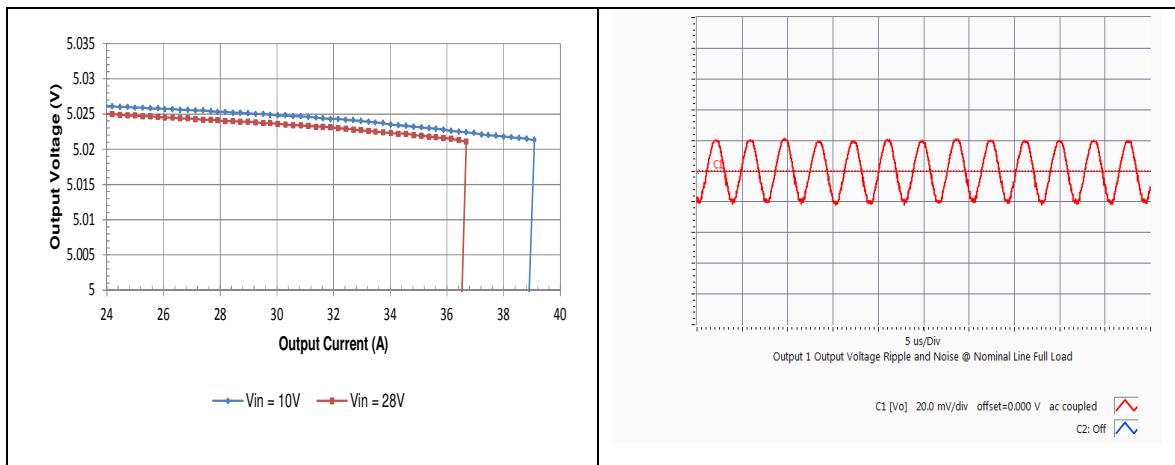

GQA2W024A050V Typical Output Current Limit Characteristics vs. Input Voltage at Ta=25 degrees.

GQA2W024A050V Typical Output Ripple at nominal Input voltage and full load at Ta=25 degree

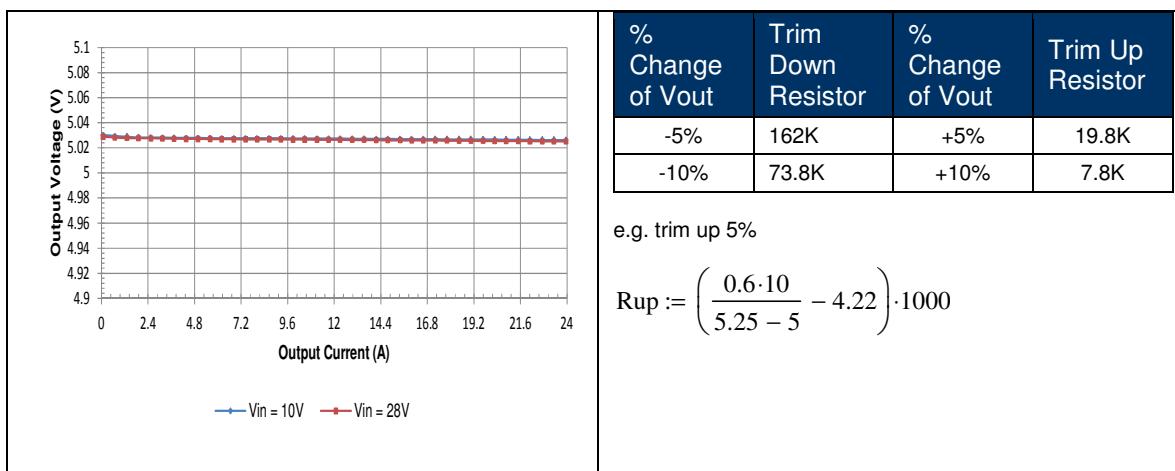


GQA2W024A050V Typical Load Regulation Characteristics at Ta=25 degrees.

GQA2W024A050V Calculated resistor values for output voltage adjustment


Intentionally blank

Thermal Performance:


GQA2W024A050V-007: 5V, 24A Output

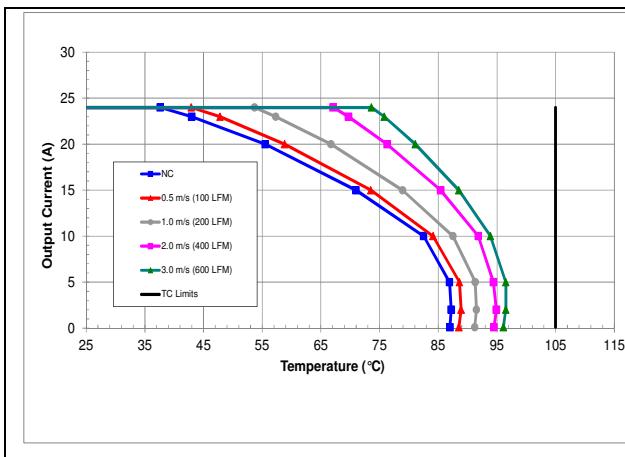


GQA2W024A050V maximum output current vs. ambient temperature at 28V input for airflow rates natural convection (60lfm) to 600lfm with airflow from pin 3 to pin 1

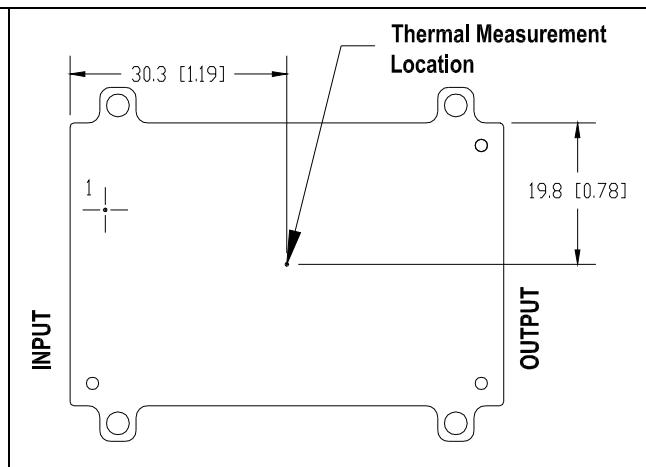

GQA2W024A050V thermal measurement location – top view

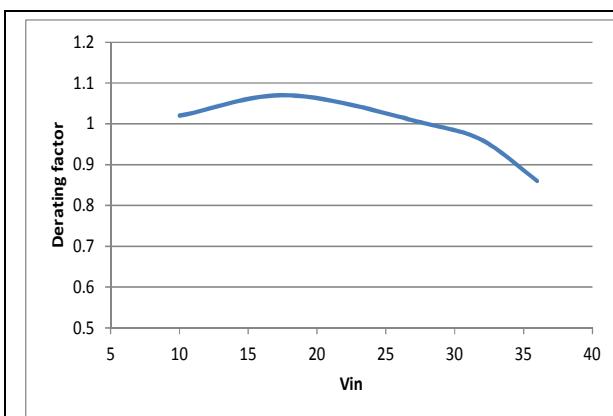

GQA2W024A050V typical temperature derating versus input voltage output with 2m/s (400 lfm) airflow from pin 3 to pin 1.

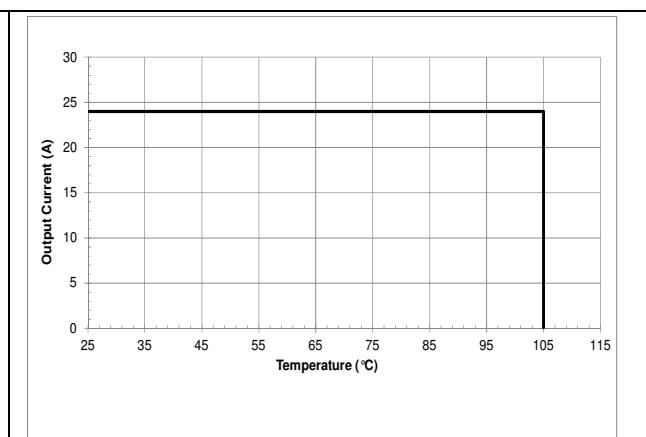

GQA2W024A050V maximum output current vs. baseplate temperature at nominal line

The thermal curves provided are based upon measurements made in TDK Lambda's experimental test setup that is described in the Thermal Management section. Due to the large number of variables in system design, TDK Lambda recommends that the user verify the module's thermal performance in the end application. The critical component should be thermo coupled and monitored, and should not exceed the temperature limit specified in the derating curve above. It is critical that the thermocouple be mounted in a manner that gives direct thermal contact or significant measurement errors may result. TDK Lambda can provide modules with a thermocouple pre-mounted to the critical component for system verification tests.

Thermal Management:

An important part of the overall system design process is thermal management; thermal design must be considered at all levels to ensure good reliability and lifetime of the final system. Superior thermal design and the ability to operate in severe application environments are key elements of a robust, reliable power module.


The mechanical design provides a low impedance thermal path from hot components to the base plate, which reduces areas of heat concentration and resulting hot spots.

Test Setup: The thermal performance of the power module was evaluated both in cold plate, conduction cooling environments and also in wind tunnel tests using the setup shown in the wind tunnel figure. The thermal test setups are intended to replicate some of the typical thermal environments that could be encountered in modern electronic systems.

The power module, as shown in the figure, is mounted on a printed circuit board (PCB) and is vertically oriented within the wind tunnel. The cross section of the airflow passage is rectangular. The spacing between the top of the module and a parallel facing PCB is kept at a constant (0.5 in). The power module's orientation with respect to the airflow direction can have an impact on the module's thermal performance.

Thermal Derating: For proper application of the power module in a given thermal environment, output current derating curves are provided as a design. The module temperature should be measured in the final system configuration to ensure proper thermal management of the power module.

For thermal performance verification, the module temperature should be measured at the base plate location indicated in the thermal measurement location figure on the thermal performance page for the power module of interest.

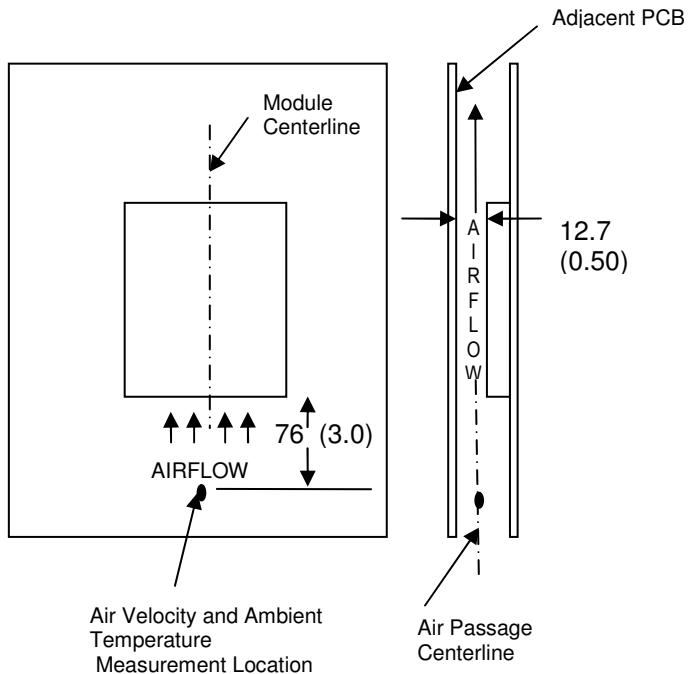

Wind Tunnel Test Setup Figure Dimensions are in millimeters and (inches).

In all conditions, the power module should be operated below the maximum operating temperature shown on the derating curve. For improved design margins and enhanced system reliability, the power module may be operated at temperatures below the maximum rated operating temperature.

In convection applications, heat transfer can be enhanced by increasing the airflow rate that the power module experiences. The maximum output current of the power module is a function of ambient temperature and airflow.

Operating Information:


Over-Current Protection: The power modules have current limit protection to protect the module during output overload and short circuit conditions. During overload conditions, the power modules may protect themselves by entering a hiccup current limit mode. The modules will operate normally once the output current returns to the specified operating range.

Output Over-Voltage Protection: The power modules have a maximum duty cycle limit to help reduce the risk of over voltage appearing at the output of the power module during fault conditions. If there is a fault in the voltage regulation loop, the protection circuitry will cause the power module to limit the output voltage. When the condition causing the over-voltage is corrected, the module will operate normally.

Thermal Protection: When the power modules exceed the maximum operating temperature, the modules may turn-off to safe-guard against thermal damage. The module will auto restart as the unit is cooled below the over temperature threshold.


Remote On/Off: - The power modules have an internal remote on/off circuit. The user must supply an open-collector or compatible switch between the Vin(-) pin and the on/off pin. The maximum voltage generated by the power module at the on/off terminal is 15V. The maximum allowable leakage current of the switch is 50uA. The switch must be capable of maintaining a low signal Von/off < 1.2V while sinking 1mA.

The standard on/off logic is negative logic. The power module will be off if terminal 2 is left open and will be on if terminal 2 is connected to terminal 3. If the on/off feature is not being used, terminal 2 should be shorted to terminal 3.

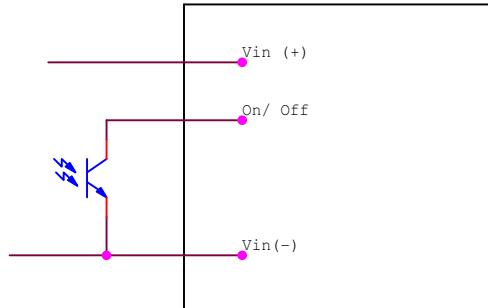

On/Off Circuit for negative logic

Output Voltage Adjustment: The output voltage of the power module may be adjusted by using an external resistor connected between the Vout trim terminal (pin 6) and either the Sense (+) or Sense (-) terminal or the Vout(+) and Vout(-) terminals if the sense feature is not populated. If the output voltage adjustment feature is not used, pin 6 should be left open. Care should be taken to avoid injecting noise into the power module's trim pin.

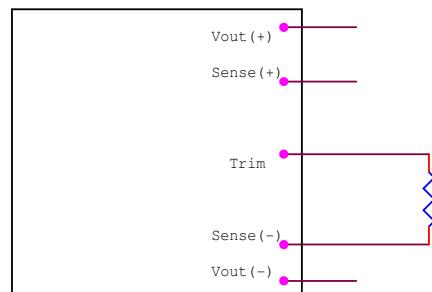


Circuit to increase output voltage

With a resistor between the trim and Sense (+) or Vout(+) terminals, the output voltage is adjusted down. To adjust the output voltage down a percentage of Vout (%Vo) from Vo,nom, the trim resistor should be chosen according to the following equation:

$$R_{down} := \left[\frac{R_a \cdot (V_{otrimdown} - 0.6)}{V_{onom} - V_{otrimdown}} \right] - R_b \cdot 1000$$

The current limit set point does not increase as the module is trimmed down, so the available output power is reduced.

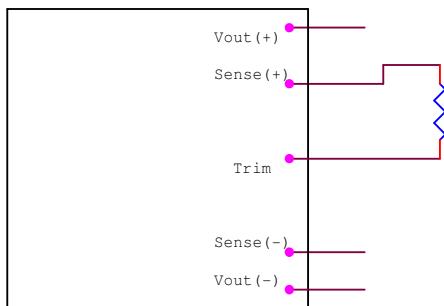

Circuit to decrease output voltage

With a resistor between the trim and sense (-) or Vout (-) terminals, the output voltage is adjusted up. To adjust the output voltage up a percentage of Vout (%Vo) from Vo,nom the trim resistor should be chosen according to the following equation:

For all outputs:

$$R_{up} := \left[\frac{0.6 R_a}{(V_{otrimup} - V_{onoma})} - R_b \right] \cdot 1000$$

The maximum power available from the power module is fixed. As the output voltage is trimmed up, the maximum output current must be decreased to maintain the maximum rated power of the module. As the output voltage is trimmed, the output over-voltage set point is not adjusted. Trimming the output voltage too high may cause the output over voltage protection circuit to be triggered.

To avoid possible damage, care should be taken not to connect the sense (+) or Vout (+) terminals directly to the module's trim pin.

Remote Sense: Some GQA power modules feature remote sense to compensate for the effect of output distribution drops. The output voltage sense range defines the maximum voltage allowed between the

output power terminals and output sense terminals, and it is found on the electrical data page for the power module of interest. If the remote sense feature is not being

used, the Sense(+) terminal should be connected to the Vo(+) terminal and the Sense (-) terminal should be connected to the Vo(-) terminal.


The output voltage at the Vo(+) and Vo(-) terminals can be increased by either the remote sense or the output voltage adjustment feature. The maximum voltage increase allowed is the larger of the remote sense range or the output voltage adjustment range; it is not the sum of both.

As the output voltage increases due to the use of the remote sense, the maximum output current must be decreased for the power module to remain below its maximum power rating.

EMC Considerations: TDK-Lambda power modules are designed for use in a wide variety of systems and applications. For assistance with designing for EMC compliance, please contact technical support.

Input Impedance:

The source impedance of the power feeding the DC/DC converter module will interact with the DC/DC converter. To minimize the interaction, a minimum 100uF input capacitor is recommended.

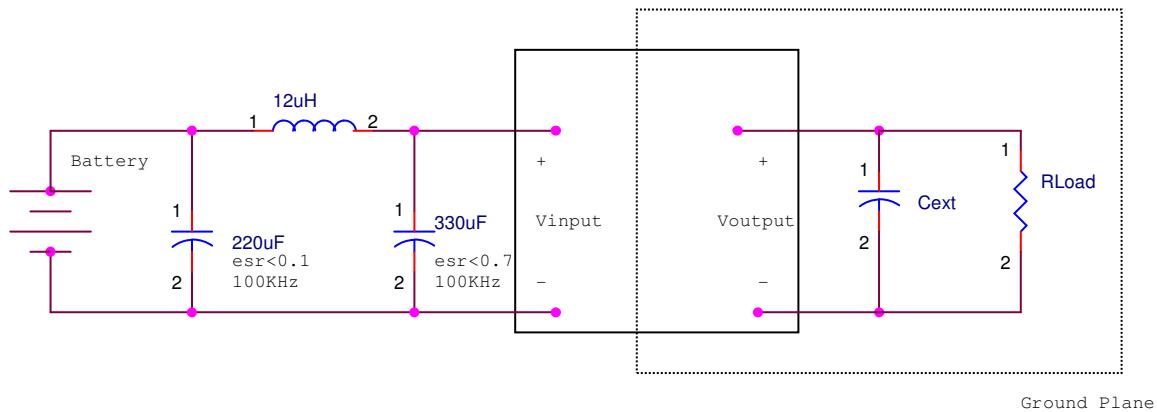Input/Output Ripple and Noise Measurements:


The input reflected ripple is measured with a current probe and oscilloscope. The ripple current is the current through the 12uH inductor.

The output ripple measurement is made approximately 9 cm (3.5 in.) from the power module using an oscilloscope and BNC socket. The capacitor Cext is located about 5 cm (2 in.) from the power module; its value varies from code to code and is found on the electrical data page for the power module of interest under the ripple & noise voltage specification in the Notes & Conditions column.

Reliability:

The power modules are designed using TDK-Lambda's stringent design guidelines for component derating, product qualification, and design reviews. Early failures are screened out by both burn-in and an automated final test.

Improper handling or cleaning processes can adversely affect the appearance, testability, and reliability of the power modules. Contact technical support for guidance regarding proper handling, cleaning, and soldering of TDK Lambda's power modules.



Advance Data Sheet: GQA Power Module – Single Output Quarter Brick

Safety Considerations:

As of the publishing date, certain safety agency approvals may have been received on the GQA series and others may still be pending. Check with TDK Lambda for the latest status of safety approval on the GQA product line.

For safety agency approval of the system in which the DC-DC power module is installed, the power module must be installed in compliance with the creepage and clearance requirements of the safety agency. The isolation is operational insulation. Care must be taken to maintain minimum creepage and clearance distances when routing traces near the power module.

As part of the production process, the power modules are hi-pot tested between primary and secondary and from primary and secondary to base plate.

To preserve maximum flexibility, the power modules are not internally fused. An external input line normal blow fuse with a maximum value of 30A is required by safety agencies. A lower value fuse can be selected based upon the maximum dc input current and maximum inrush energy of the power module.

The power module meets all of the requirements for SELV, provided that the input meets SELV requirements.

Warranty:

TDK Lambda's comprehensive line of power solutions includes efficient, high-density DC-DC converters. TDK Lambda offers a three-year limited warranty. Complete warranty information is listed on our web site or is available upon request from TDK Lambda.



401 Mile Cars Way, Suite 125
National City, CA 91950
Phone (800)526-2324 Toll Free

Lambda.TechSupport@us.tdk-lambda.com
www.us.tdk-lambda.com/lp/

Information furnished by TDK Lambda is believed to be accurate and reliable. However, TDK Lambda assumes no responsibility for its use, nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TDK Lambda. TDK components are not designed to be used in applications, such as life support systems, wherein failure or malfunction could result in injury or death. All sales are subject to TDK Lambda's Terms and Conditions of Sale, which are available upon request. Specifications are subject to change without