



Quality Products. Service Excellence.

Tube Driver - Interstage *126 Series*

Features





ASK ABOUT
Custom
Transformers
& Chokes



Classic

✓ RoHS

- Designed for driver use ONLY in single ended tube output amplifiers. These units replace coupling capacitor circuits for improved sound.
- Closed style with minimum 8" long leads.
- All models use bifilar wound windings for exceptional coupling and bandwidth.
- Minimum frequency response 20 Hz. - 20 KHz (+/- 1db max. ref. 1 KHz.).
- The core is gapped to support the specified D.C. bias current.
- Maximum working voltage - 400 VDC
- Units are Hi-Pot tested at 1,000 VDC
- Core uses Hi grade silicon laminations (29M6).
- Units weight - 3 lbs. 2 oz.

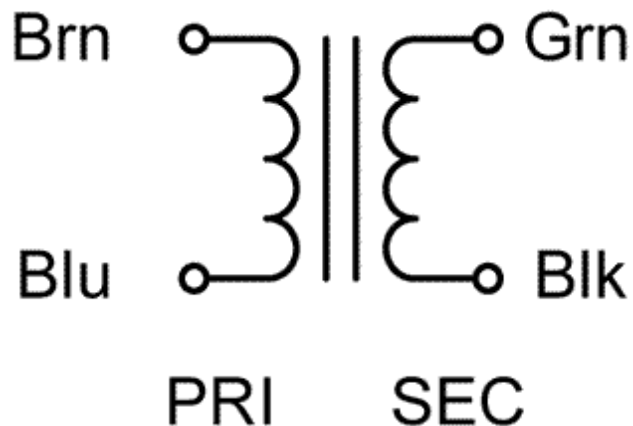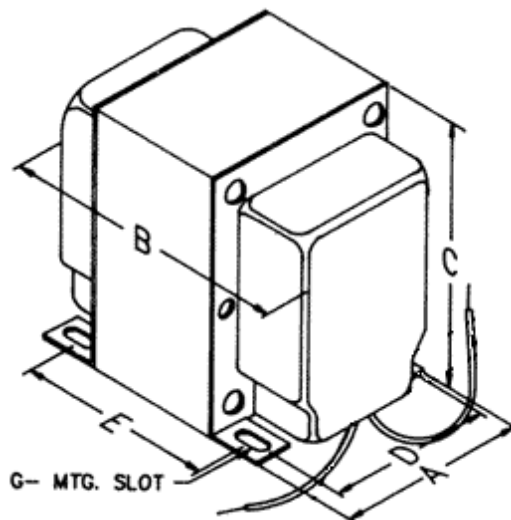

Part No.	Primary				Secondary				Dimensions					
	Audio Watts	Impedance (Ohms)	D.C.		Impedance (Ohms)	D.C.		Inductance	Rated D.C. Bias Current	A	B	C	D	E
			Resistance (Ohms)	Resistance (Ohms)		Resistance (Ohms)	Resistance (Ohms)							
126A	4	5K	178		5K	178		59 Henrys	15 ma.	2.50	3.12	3.12	2.00	2.25
126B	4	5K	178		5K	178		44 Henries	30 ma.	2.50	3.12	3.12	2.00	2.25
126C	4	10K	375		10K	375		106 Henrys	15 ma.	2.50	3.12	3.12	2.00	2.25

Tags: **audio transformer, interstage, tube driver, single ended, output**

Data subject to change without notice

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hammond:](#)

[126B](#) [126A](#) [126C](#)