



AC/DC Converter
Non-Isolation Buck Converter PWM method
3 W 20 V
BM2P209TF Reference Board

User's Guide

<High Voltage Safety Precautions>

- ◇ Read all safety precautions before use

Please note that this document covers only the BM2P209TF evaluation board (BM2P209TF-EVK-001) and its functions. For additional information, please refer to the datasheet.

To ensure safe operation, please carefully read all precautions before handling the evaluation board



Depending on the configuration of the board and voltages used,

Potentially lethal voltages may be generated.

Therefore, please make sure to read and observe all safety precautions described in the red box below.

Before Use

- [1] Verify that the parts/components are not damaged or missing (i.e. due to the drops).
- [2] Check that there are no conductive foreign objects on the board.
- [3] Be careful when performing soldering on the module and/or evaluation board to ensure that solder splash does not occur.
- [4] Check that there is no condensation or water droplets on the circuit board.

During Use

- [5] Be careful to not allow conductive objects to come into contact with the board.
- [6] **Brief accidental contact or even bringing your hand close to the board may result in discharge and lead to severe injury or death.**

Therefore, DO NOT touch the board with your bare hands or bring them too close to the board.

In addition, as mentioned above please exercise extreme caution when using conductive tools such as tweezers and screwdrivers.

- [7] If used under conditions beyond its rated voltage, it may cause defects such as short-circuit or, depending on the circumstances, explosion or other permanent damages.
- [8] Be sure to wear insulated gloves when handling is required during operation.

After Use

- [9] The ROHM Evaluation Board contains the circuits which store the high voltage. Since it stores the charges even after the connected power circuits are cut, please discharge the electricity after using it, and please deal with it after confirming such electric discharge.
- [10] Protect against electric shocks by wearing insulated gloves when handling.

This evaluation board is intended for use only in research and development facilities and should be handled **only by qualified personnel familiar with all safety and operating procedures.**

We recommend carrying out operation in a safe environment that includes the use of high voltage signage at all entrances, safety interlocks, and protective glasses.

AC/DC Converter**Non-Isolation Buck Converter PWM method Output 3 W 20 V****BM2P209TF Reference Board****BM2P209TF-EVK-001**

The BM2P209TF-EVK-001 evaluation board outputs 20 V voltage from the input of 90 Vac to 264 Vac. The output current supplies up to 0.15 A. BM2P209TF which is PWM method DC/DC converter IC built-in 650 V MOSFET is used.

The BM2P209TF contributes to low power consumption by built-in a 650 V starting circuit. Built-in current detection resistor realizes compact power supply design.

Current mode control imposes current limitation on every cycle, providing superior performance in bandwidth and transient response.

The switching frequency is 100 kHz in fixed mode. At light load, frequency is reduced and high efficiency is realized. Built-in frequency hopping function contributes to low EMI. Low on-resistance 9.5 Ω 650 V MOSFET built-in contributes to low power consumption and easy design.



Figure 1. BM2P209TF-EVK-001

Electronics Characteristics

Not guarantee the characteristics, is representative value.

Unless otherwise noted : $V_{IN} = 230$ Vac, $I_{OUT} = 50$ mA, $T_a:25$ °C

Parameter	Min	Typ	Max	Units	Conditions
Input Voltage Range	90	230	264	Vac	
Input Frequency	47	50/60	63	Hz	
Output Voltage	18.0	20.0	22.0	V	
Maximum Output Power	-	-	3.0	W	$I_{OUT} = 150$ mA
Output Current Range (NOTE1)	2	50	150	mA	
Stand-by Power	-	74	-	mW	$I_{OUT} = 0$ A
Efficiency	-	80.4	-	%	$I_{OUT} = 150$ mA
Output Ripple Voltage (NOTE2)	-	35	-	mVpp	
Operating Temperature Range	-10	+25	+65	°C	

(NOTE1) Please adjust operating time, within any parts surface temperature under 105 °C

(NOTE2) Not include spike noise

Operation Procedure

1. Operation Equipment

- (1) AC Power supply 90 Vac~264 Vac, over 10W
- (2) Electronic Load capacity 0.15 A
- (3) Multi meter

2. Connect method

- (1) AC power supply presetting range 90~264 Vac, Output switch is off.
- (2) Load setting under 0.15 A. Load switch is off.
- (3) AC power supply N terminal connect to the board AC (N) of CN1, and L terminal connect to AC(L).
- (4) Load + terminal connect to VOUT, GND terminal connect to GND terminal
- (5) AC power meter connect between AC power supply and board.
- (6) Output test equipment connects to output terminal
- (7) AC power supply switch ON.
- (8) Check that output voltage is 20 V.
- (9) Electronic load switch ON
- (10) Check output voltage drop by load connect wire resistance



CN1: from the top AC (L), AC (N)

Figure 2. Connection Circuit

Deleting

Maximum Output Power P_o of this reference board is 3 W. If ambient temperature is over 55 °C, The derating curve is shown on the right. Please adjust load continuous time by over 105 °C of any parts surface temperature.

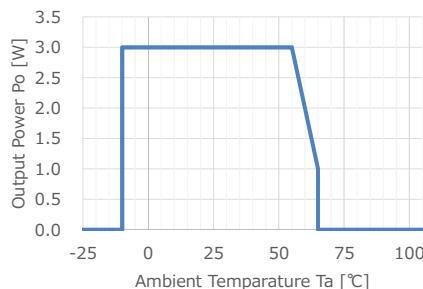


Figure 3. Temperature Deleting curve

Application Circuit

$V_{IN} = 90 \sim 264$ Vac, $V_{OUT} = 20$ V

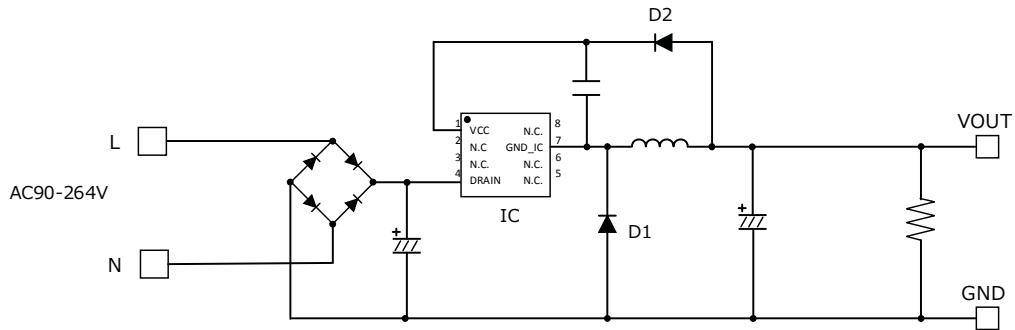


Figure 4. BM2P209TF-EVK-001 Application Circuit

The BM2P209TF is non-insulation method without opto-coupler and feeds back the VCC voltage to 20.0 V typ. This VCC voltage is the voltage between the VCC pin and the GND_IC pin.

The output voltage VOUT is defined by the following equation.

$$V_{OUT} = V_{CNT} + V_{FD2} - V_{FD1}$$

V_{CNT} : VCC Control Voltage

V_{FD1} : Forward Voltage of diode D1

V_{FD2} : Forward Voltage of diode D2

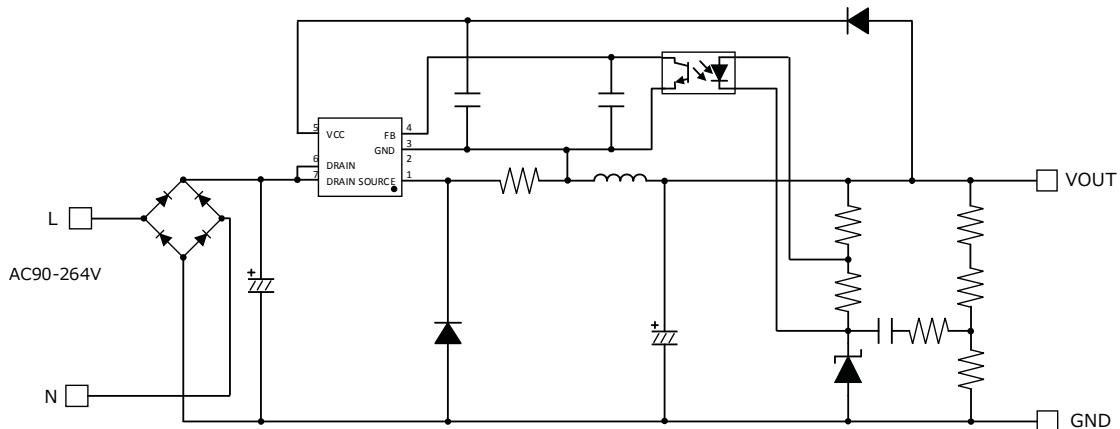


Figure 5. General Buck converter application circuit

Compared to the general Buck converter as shown above, the number of parts is reduced because the feedback circuit is not required. However, the output voltage may rise at light load because the VCC voltage and the output voltage that are fed back are different. In that case, please put a resistance on the output terminal and lower the output voltage.

BM2P20TF Overview

Feature

- PWM Frequency =100kHz
- PWM current mode method
- Frequency hopping function
- Burst operation at light load
- Built-in 650 start circuit
- Built-in 650V switching MOSFET
- VCC pin under voltage protection
- VCC pin over voltage protection
- Over current limiter function per cycle
- Soft start function

Key specifications

- Power Supply Voltage Operation Range:
VCC: 10.60 V to 21.62 V
DRAIN: to 650 V
- Normal Operation Current: 0.85 mA(Typ)
- Burst Operation Current: 0.45 mA(Typ)
- Oscillation Frequency: 100 kHz(Typ)
- Operation Temperature Range: -40 °C ~ +105 °C
- MOSFET Ron: 9.5 Ω (Typ.)

Application

LED lights, air conditioners, and cleaners, (etc.).

W(Typ) x D(Typ) x H(Typ)

SOP-J8

5.00 mm x 6.20 mm x 1.71 mm

Pitch 1.27 mm



Figure 6. SOP8 Package

(*) Product structure : Silicon monolithic integrated circuit This product has no designed protection against radioactive rays

(*) Operating the IC over the absolute maximum ratings may damage the IC. The damage can either be a short circuit between pins or an open circuit between pins and the internal circuitry. Therefore, it is important to consider circuit protection measures, such as adding a fuse, in case the IC is operated over the absolute maximum ratings.

Table 1. BM2P209TF Pin description

No.	Name	I/O	Function	ESD Diode	
				VCC	GND
1	VCC	I	Power Supply input pin	-	✓
2	-	-	-	-	-
3	-	-	-	-	-
4	DRAIN	I/O	MOSFET DRAIN pin	-	✓
5	-	-	-	-	-
6	-.	-	-	-	-
7	GND_IC	I/O	GND pin	✓	-
8	-.	-	-	-	-

Design Overview

1 Important Parameter

- V_{IN} : Input Voltage Range AC 90 V ~ 264 Vac (DC 100 V ~ 380 V)
- V_{OUT} : Output Voltage DC 20 V
- $I_{OUT}(\text{Typ})$: Constant Output Current 0.05 A
- $I_{OUT}(\text{Max})$: Max Output Current 0.15 A
- f_{sw} : Switching Frequency Min:94 kHz, Typ:100 kHz, Max:106 kHz
- $I_{peak}(\text{Min})$: Over Current Limit Min:0.395 A, Typ:0.450 A, Max:0.505A

2 Coil Selection

2.1 Determining coil inductance

The switching operation mode determines the L value so that it becomes as discontinuous mode (DCM) as possible. In the continuous mode (CCM), reverse current in trr of the diode flows, which leads to an increase in power loss of diode.

Furthermore, this reverse current becomes the peak current when the MOSFET is ON, and the power loss of the MOSFET also increases. The maximum load current I_{OUT} (Max): 0.15 A, the peak current I_L flowing through the inductor is:

$$I_P(\text{BCM}) = I_{OUT}(\text{Max}) \times 2 = 0.3 \quad [\text{A}]$$

It tends to be in continuous mode (CCM) when the input voltage drops. Calculate with input voltage minimum voltage 100 Vdc.

From the output voltage V_{OUT} : 20 V and the diode V_F : 1 V,

Calculate the maximum value of Duty: Duty (Max).

$$\text{Duty}(\text{max}) = \frac{V_{OUT} + V_F}{V_{IN}(\text{Min})}$$

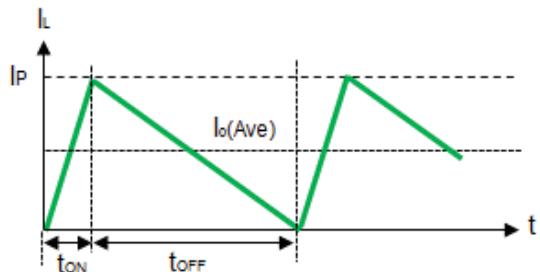


Figure 7. Coil current waveform in BCM

From the minimum switching frequency f_{sw} (Min) = 94 kHz,

Calculate on time t_{ON} (Max)

$$t_{ON}(\text{Max}) = \frac{\text{Duty}(\text{Max})}{f_{sw}(\text{Min})} = 2.23 \quad [\mu\text{sec}]$$

Calculate L value to operate in discontinuous mode.

$$L < t_{ON}(\text{Max}) \times \frac{V_{IN}(\text{Min}) - V_{OUT}}{I_P} = 595.7 \quad [\mu\text{H}]$$

Then, the L value is provisionally selected to be 470 μH in consideration of generality.

2.1 Determining coil inductance - Continued

Also, calculate L value so that the overcurrent detection becomes maximum load current I_{OUT} : 150 mA or more. Overcurrent detection is calculated by the current flowing through the MOSFET when operating in continuous mode at the minimum switching frequency f_{sw} (Min) = 94 kHz. When the current flowing through the MOSFET (\neq the coil current at switching ON) exceeds the minimum value I_{peak} (Min): 0.395 A of the overcurrent detection current, the MOSFET is turned OFF. Since a delay of approximately $tdly$ = 0.1 μ sec occurs, in reality, the peak current exceeds the I_{peak} value and the peak current becomes I_p . The peak current I_p is obtained by setting the current slope at switching ON to ΔI_L ,

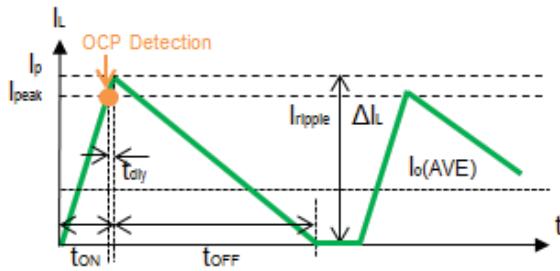


Figure 8. Coil waveform at overcurrent detection (DCM)

The peak current I_p at the time of over current detection is

$$I_p = I_{PEAK}(\text{Min}) + \Delta I_L \times t_{dly}$$

$$I_p = I_{PEAK}(\text{Min}) + \frac{V_{IN}(\text{Min}) - V_{OUT}}{L} \times t_{dly} = 412 \text{ [mA]}$$

Assuming the discontinuous mode (DCM), Switching ON time: t_{ON} , OFF time: t_{OFF} are

$$t_{ON}(\text{DCM}) = \frac{I_p \times L}{V_{IN}(\text{Min}) - V_{OUT}} = 2.42 \text{ [\mu sec]}$$

$$t_{OFF}(\text{DCM}) = \frac{I_p \times L}{V_{OUT} + V_F} = 9.22 \text{ [\mu sec]}$$

$$t_{ON}(\text{DCM}) + t_{OFF}(\text{DCM}) = 11.64 \text{ [\mu sec]}$$

Since the total of ON time and OFF time is less than 10.64 μ sec in switching cycle, it becomes continuous mode (CCM) when detecting over current. The current at the time of overcurrent detection in continuous mode (CCM): I_{OUT} (LIM) is

$$I_{OUT}(\text{LIM}) = I_p - \frac{(V_{OUT} + V_F) \times (V_{IN}(\text{Min}) - V_{OUT})}{2 \times V_{IN}(\text{Min}) \times f_{sw} \times L} = 233.3 \text{ [mA]}$$

It is confirmed that the minimum over current detection current is 233 mA and the maximum load current is 150 mA or more.

2 Coil Selection - Continued

2.2 Inductor Current Calculation

Calculate the maximum peak current of the inductor. The condition where the peak current is maximized is when the input voltage is the maximum voltage V_{IN} (Max): 380 V, the maximum load current I_O (Max): 0.15 A, and the switching frequency is 106 kHz at the minimum. The peak current I_P of the coil is given by the following formula.

$$I_P = \sqrt{\frac{2 \times I_O \times (V_{IN}(Max) - V_O) \times (V_O + V_F)}{F_{SW}(Max) \times L \times (V_{IN} + V_F)}} = 346 \text{ [mA]}$$

Select a coil with a rated current of 0.346 A or more.

In this EVK, we use inductance value: 470 μ H, rated: 0.5 A product

Radial inductor (closed magnetic circuit type) Core Size $\Phi 11.0 \text{ mm} \times 11.5 \text{ mm}$

Product: 744 747 147 1

Manufacture: Wurth Electronix

3 Diode Selection

3.1 Flywheel Diode: D1

Flywheel diode uses fast diode (fast recovery diode). The reverse voltage of the diode is V_{IN} (Max): 380 V when the output voltage at startup is 0 V. Consider the derating and select 600 V diode. The condition where the effective current of the diode is maximized is when the input voltage is the maximum voltage V_{IN} (Max): 380 V, the maximum load current I_O (Max): 0.167 A, and the switching frequency is 94 kHz at the minimum.

$$Duty = \frac{V_{OUT} + V_F}{V_{IN}(Max)} = 5.5 \quad [\%]$$

The average current I_D of the diode is calculated from the peak current I_P : 0.346 A by the following formula

$$I_D(rms) = I_P \times \sqrt{\frac{1 - Duty}{3}} = 0.194 \quad [A]$$

Select the rated current of 0.194 A or more.

In fact, we used RFN1LAM6S of 0.8 A / 600 V product as a result of mounting the board and considering the parts temperature.

3.2 VCC Rectifier Diode: D2

Rectifier diodes are used for diodes to supply VCC. The reverse voltage applied to the diode is V_{IN} (Max): 380 V. Consider the derating and select 600 V diode. Since the current flowing to the IC is small enough, we use the 0.2 A / 600 V RRE02VSM6S.

Design Overview – Continued

4 Capacitor Selection

4.1 Input Capacitor: C1

The input capacitor is determined by input voltage V_i and output power P_{OUT} . As a guide, for an input voltage of 90 to 264 Vac, $2 \times P_{OUT} [W] \mu F$. For 176 to 264 Vac, set $1 \times P_{OUT} [W] \mu F$. Since the output power $P_{OUT} = 2 W$, $4.7 \mu F / 400 V$ is selected with a guideline of $6.0 \mu F$.

4.2 VCC Capacitor: C3

The VCC capacitor C3 is required for stable operation of the device and stable feedback of the output voltage. A withstand voltage of 35 V or more is required, and $1.0 \mu F$ to $4.7 \mu F$ is recommended. $1 \mu F / 50 V$ is selected.

4.3 Output Capacitor: C2, C4

For the output capacitor, select output voltage V_o of 25 V or more in consideration of derating. For C2 electrolytic capacitors, capacitance, impedance and rated ripple current must be taken into consideration.

The output ripple voltage is a composite waveform generated by electrostatic capacity: C_{out} , impedance: ESR when the ripple component of inductor current: ΔI_L flows into the output capacitor and is expressed by the following formula.

$$\Delta V_{ripple} = \Delta I_L \times \left(\frac{1}{8 \times C_{out} \times f_{sw}} \right) + ESR$$

The inductor ripple current is

$$\Delta I_L = 2 \times \{I_P - I_{OUT}(\max)\} = 2 \times (0.346 - 0.150) = 0.392 \quad [A]$$

For this EVK, we use electrostatic capacity: $100 \mu F$, ESR: 0.075Ω , and the design value of output ripple voltage is less than 100 mV.

$$\Delta V_{ripple} = \Delta I_L \times \left\{ \left(\frac{1}{8 \times C_{out} \times f_{sw}} \right) + ESR \right\} = 0.392 \times \left\{ \left(\frac{1}{8 \times 100 \mu F \times 100k} \right) + 0.075 \right\} = 34.3 \quad [mV]$$

Next, check whether the ripple current of the capacitor satisfies the rated ripple current.

Inductor ripple current RMS conversion,

$$I_L[rms] = \Delta I_L \times \sqrt{\frac{1}{3}} = 0.226 \quad [A]$$

The ripple current of the capacitor is

$$I_C[rms] = \sqrt{I_L^2 - I_{OUT}^2} = \sqrt{0.226^2 - 0.150^2} = 0.169 \quad [A]$$

4.3 Output Capacitor C2, C4 - Continued

Select a rated current of 0.169 A or more.

The output capacitor C2 used a rated ripple current of 0.73 A at 100 μ F / 50 V.

C8 has added a 0.1 μ F ceramic capacitor to reduce switching noise.

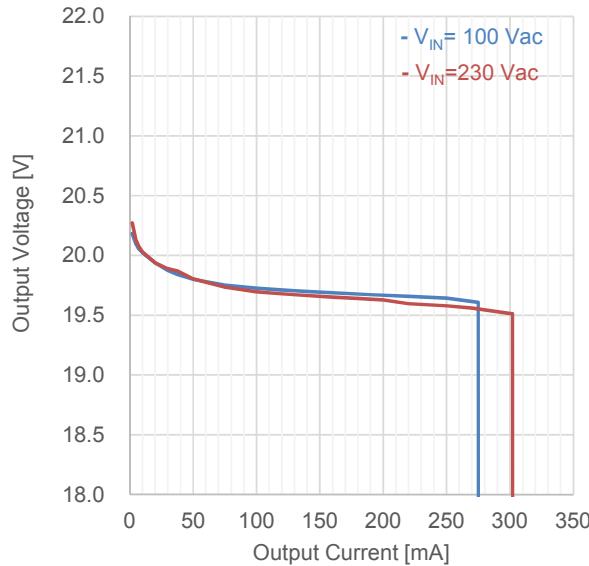
5. Resistor Selection

5.1 Bleeder Resister: R1

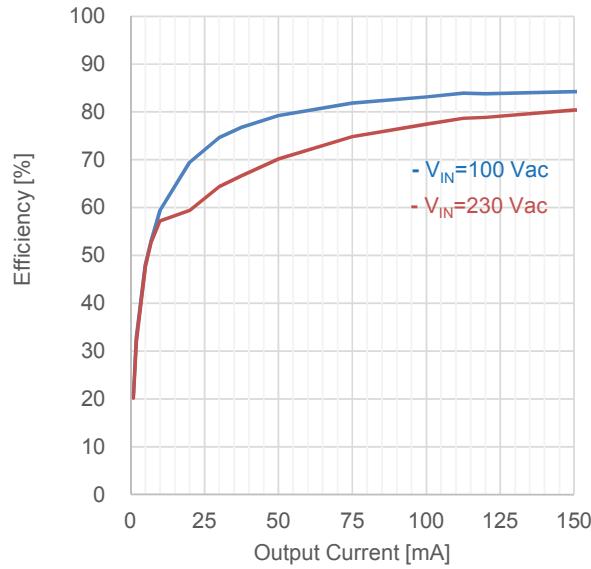
Because it is indirectly fed back to the output voltage, the output voltage increases at light load. This board uses bleeder resistance for its improvement. Reducing the resistance value improves the rise in the output voltage of the light load, but increases the power loss. 10 k Ω / 0.1 W is used.

Performance Data

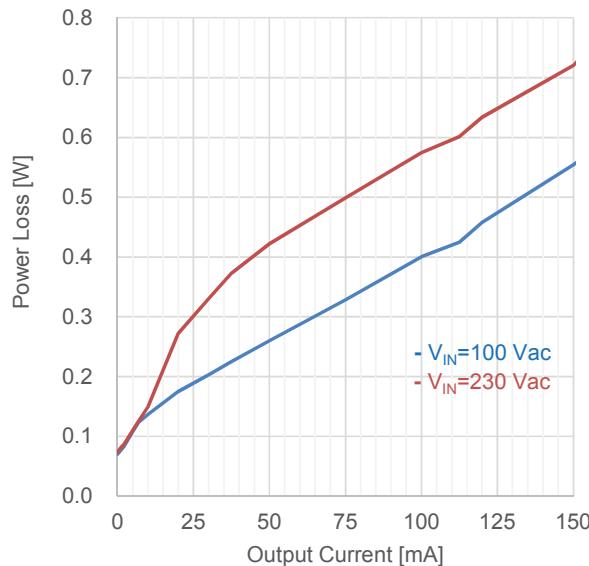
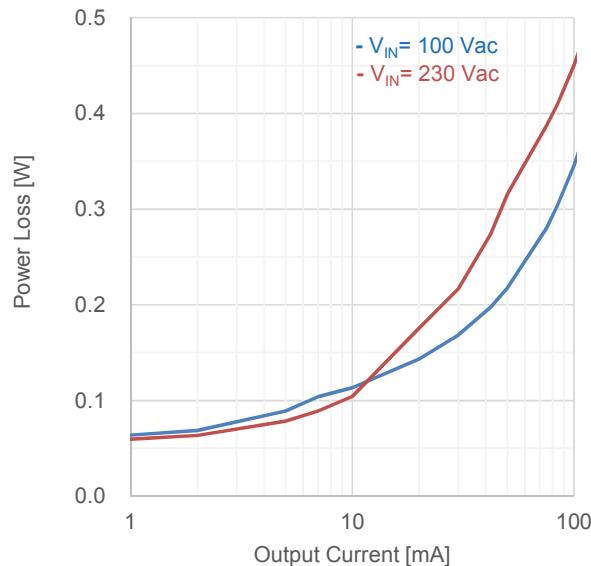
Constant Load Regulation

Figure 9. Load Regulation (I_{OUT} vs V_{OUT})Table 2. Load Regulation ($V_{IN}=100$ Vac)

I_{OUT}	V_{OUT}	Efficiency
37.5 mA	19.840 V	76.78 %
75.0 mA	19.753 V	81.85 %
112.5 mA	19.717 V	83.93 %
150.0 mA	19.693 V	84.21 %

Figure 10. Load Regulation (I_{OUT} vs Efficiency)Table 3. Load Regulation ($V_{IN}=230$ Vac)

I_{OUT}	V_{OUT}	Efficiency
37.5 mA	19.871 V	66.65 %
75.0 mA	19.736 V	74.80 %
112.5 mA	19.685 V	78.64 %
150.0 mA	19.658 V	80.37 %

Figure 11. Load Regulation (I_{OUT} vs P_{LOSS})Figure 12. Load Regulation (I_{OUT} vs P_{LOSS})

Performance Data - Continued

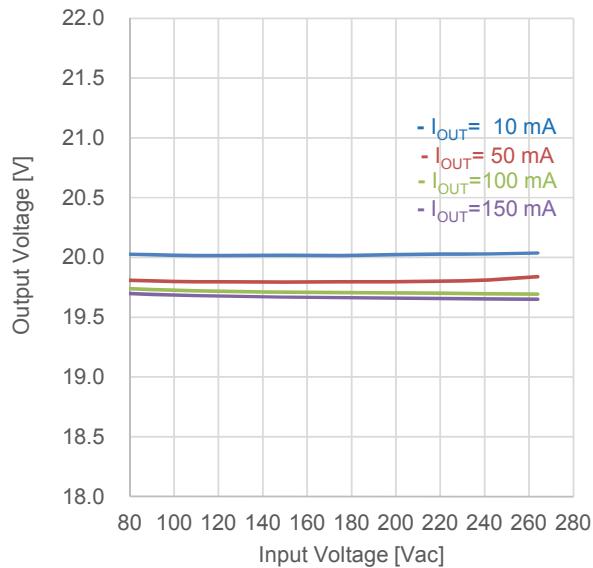
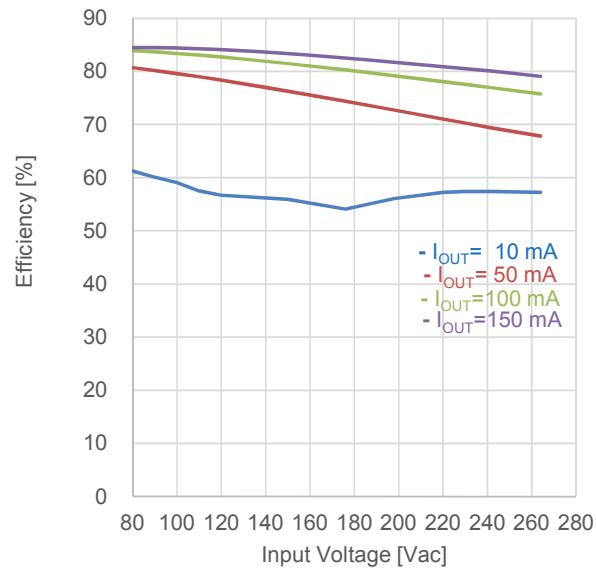
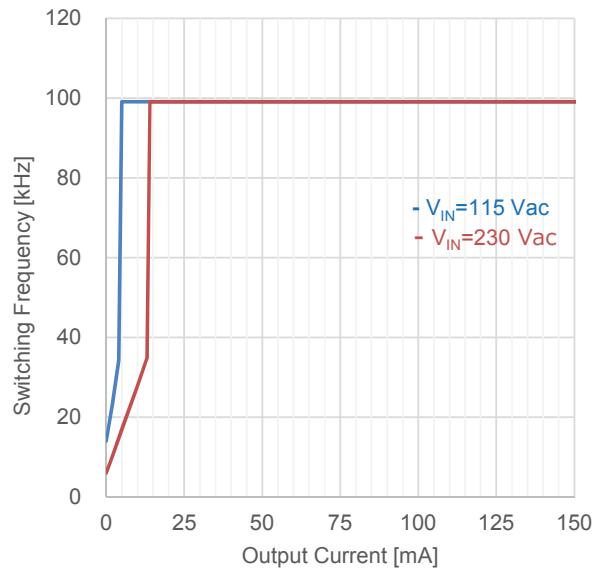
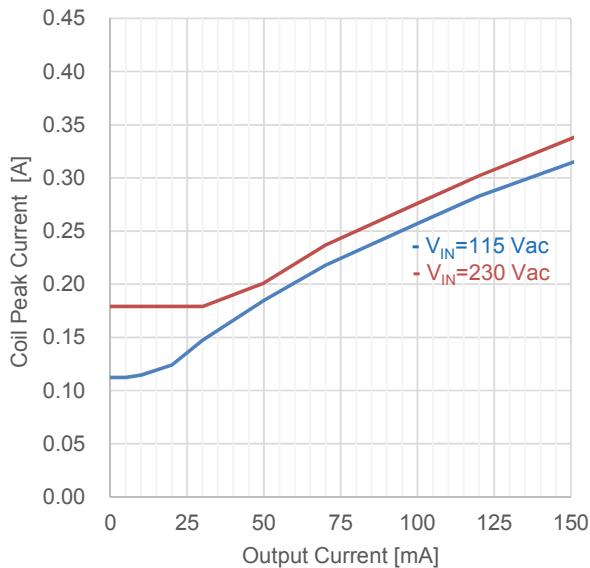
Table 4. Load Regulation : $V_{IN}=100$ Vac

V_{IN} [Vac]	P_{IN} [W]	V_{OUT} [V]	I_{OUT} [A]	P_{OUT} [W]	P_{LOSS} [W]	Efficiency [%]
100	0.070	20.306	0	0.000	0.070	0.00
100	0.097	20.238	1	0.020	0.077	20.86
100	0.123	20.184	2	0.040	0.083	32.82
100	0.209	20.093	5	0.100	0.109	48.07
100	0.264	20.056	7	0.140	0.124	53.18
100	0.337	20.022	10	0.200	0.137	59.41
100	0.574	19.940	20	0.399	0.175	69.48
100	0.799	19.874	30	0.596	0.203	74.62
100	0.969	19.840	37.5	0.744	0.225	76.78
100	1.250	19.800	50	0.990	0.260	79.20
100	1.810	19.753	75	1.481	0.329	81.85
100	2.373	19.726	100	1.973	0.400	83.13
100	2.643	19.717	112.5	2.218	0.425	83.93
100	2.823	19.711	120	2.365	0.458	83.79
100	3.508	19.693	150	2.954	0.554	84.21
100	3.974	19.682	170	3.346	0.628	84.20
100	4.207	19.677	180	3.542	0.665	84.19
100	4.674	19.667	200	3.933	0.741	84.15
100	5.146	19.657	220	4.325	0.821	84.04
100	5.864	19.642	250	4.911	0.954	83.74
100	6.482	19.608	275	5.392	1.090	83.19
100	0.058	0.000	276	0.000	0.058	0.00

Table 5. Load Regulation: $V_{IN}=230$ Vac

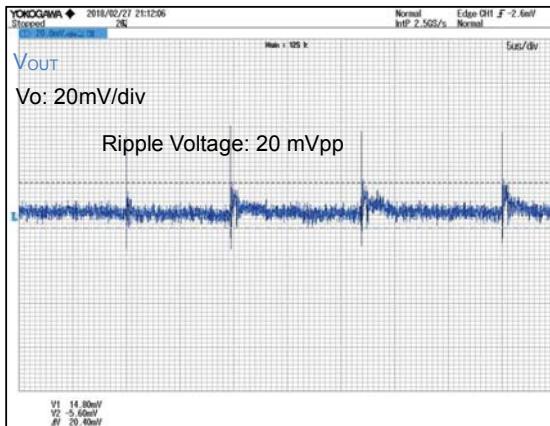
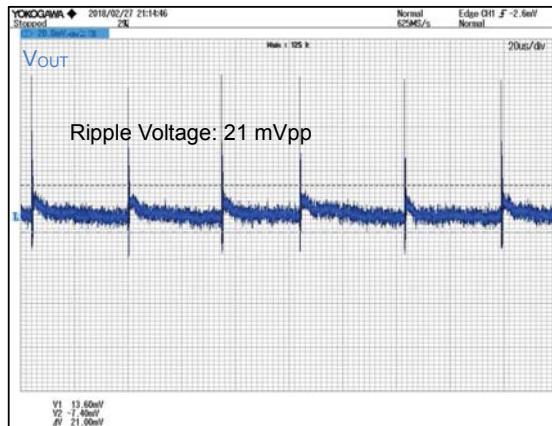
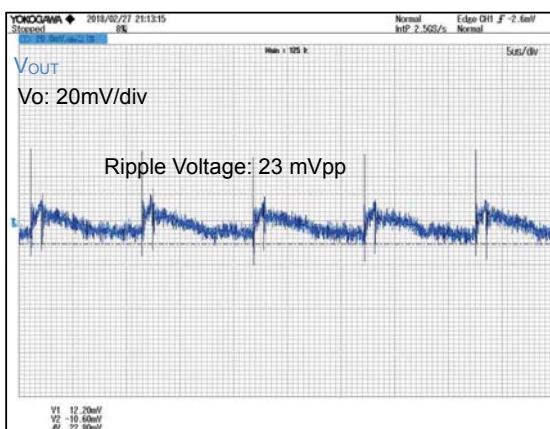
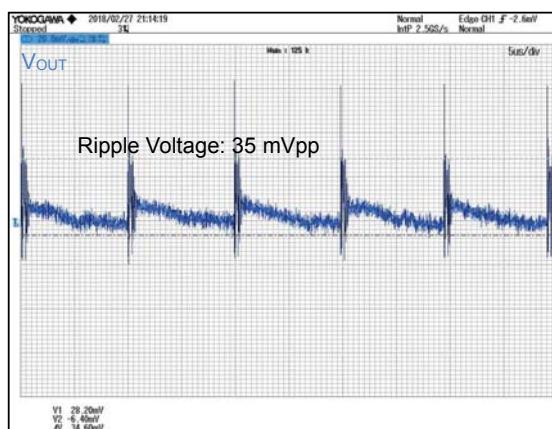
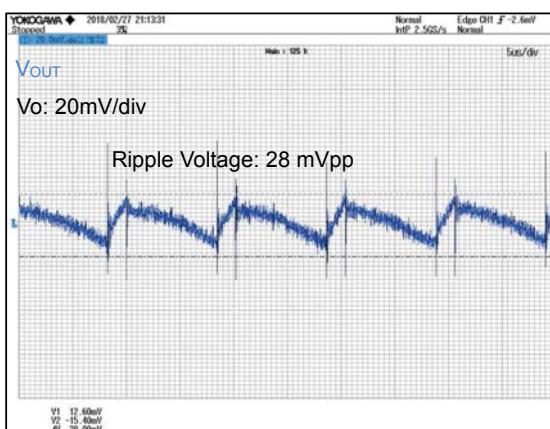
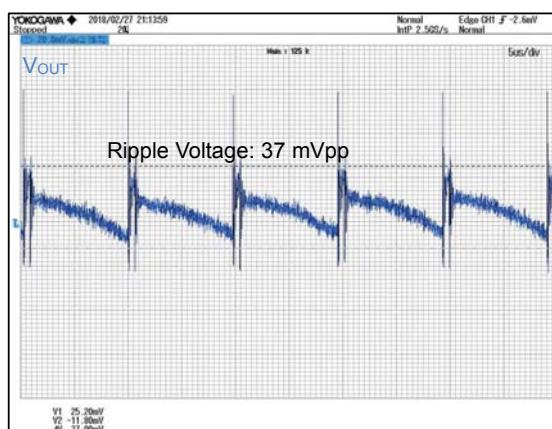
V_{IN} [Vac]	P_{IN} [W]	V_{OUT} [V]	I_{OUT} [A]	P_{OUT} [W]	P_{LOSS} [W]	Efficiency [%]
230	0.074	20.525	0.0	0.000	0.074	0.00
230	0.101	20.365	1.0	0.020	0.081	20.16
230	0.127	20.273	2.0	0.041	0.086	31.93
230	0.211	20.127	5.0	0.101	0.110	47.69
230	0.266	20.078	7.0	0.141	0.125	52.84
230	0.350	20.030	10.0	0.200	0.150	57.23
230	0.671	19.939	20.0	0.399	0.272	59.43
230	0.927	19.891	30.0	0.597	0.330	64.37
230	1.118	19.871	37.5	0.745	0.373	66.65
230	1.412	19.805	50.0	0.990	0.422	70.13
230	1.979	19.736	75.0	1.480	0.499	74.80
230	2.544	19.696	100.0	1.970	0.574	77.42
230	2.816	19.685	112.5	2.215	0.601	78.64
230	2.995	19.679	120.0	2.361	0.634	78.85
230	3.669	19.658	150.0	2.949	0.720	80.37
230	4.168	19.646	170.0	3.340	0.828	80.13
230	4.423	19.640	180.0	3.535	0.888	79.93
230	4.927	19.628	200.0	3.926	1.001	79.68
230	5.487	19.595	220.0	4.311	1.176	78.57
230	6.262	19.578	250.0	4.895	1.368	78.16
230	6.925	19.558	270.0	5.281	1.644	76.26
230	7.588	19.516	300.0	5.855	1.733	77.16
230	7.655	19.513	302.0	5.893	1.762	76.98
230	0.140	0.000	303.0	0.000	0.140	0.00

Performance Data - Continued

Line RegulationFigure 13. Line Regulation (V_{IN} vs V_{OUT})Figure 14. Line Regulation (V_{IN} vs Efficiency)Switching FrequencyFigure 15. Switching Frequency (I_{OUT} vs f_{sw})Coil Peak CurrentFigure 16. Coil Peak Current (I_{OUT} vs I_p)

Performance Data - Continued

Output Ripple Voltage

Figure 17. $V_{IN} = 115$ Vac, $I_{OUT} = 10$ mAFigure 18. $V_{IN} = 230$ Vac, $I_{OUT} = 10$ mAFigure 19. $V_{IN} = 115$ Vac, $I_{OUT} = 0.05$ AFigure 20. $V_{IN} = 230$ Vac, $I_{OUT} = 0.05$ AFigure 21. $V_{IN} = 115$ Vac, $I_{OUT} = 0.15$ AFigure 22. $V_{IN} = 230$ Vac, $I_{OUT} = 0.15$ A

Performance Data – Continued

Parts surface temperature

Table 6. Parts surface temperature $\times T_a = 25 \text{ }^\circ\text{C}$, measured 30 minutes after setup

Part	Condition			
	$V_{IN}=90 \text{ Vac}$, $I_{OUT}=0.05 \text{ A}$	$V_{IN}=90 \text{ Vac}$, $I_{OUT}=0.15 \text{ A}$	$V_{IN}=264 \text{ Vac}$, $I_{OUT}=0.05 \text{ A}$	$V_{IN}=264 \text{ Vac}$, $I_{OUT}=0.15 \text{ A}$
IC1	46.4 $^\circ\text{C}$	58.7 $^\circ\text{C}$	64.6 $^\circ\text{C}$	70.2 $^\circ\text{C}$
D1	44.1 $^\circ\text{C}$	55.4 $^\circ\text{C}$	48.2 $^\circ\text{C}$	58.2 $^\circ\text{C}$
L1	46.1 $^\circ\text{C}$	53.3 $^\circ\text{C}$	58.2 $^\circ\text{C}$	55.8 $^\circ\text{C}$

Schematics

$V_{IN} = 90 \sim 264$ Vac, $V_{OUT} = 20$ V

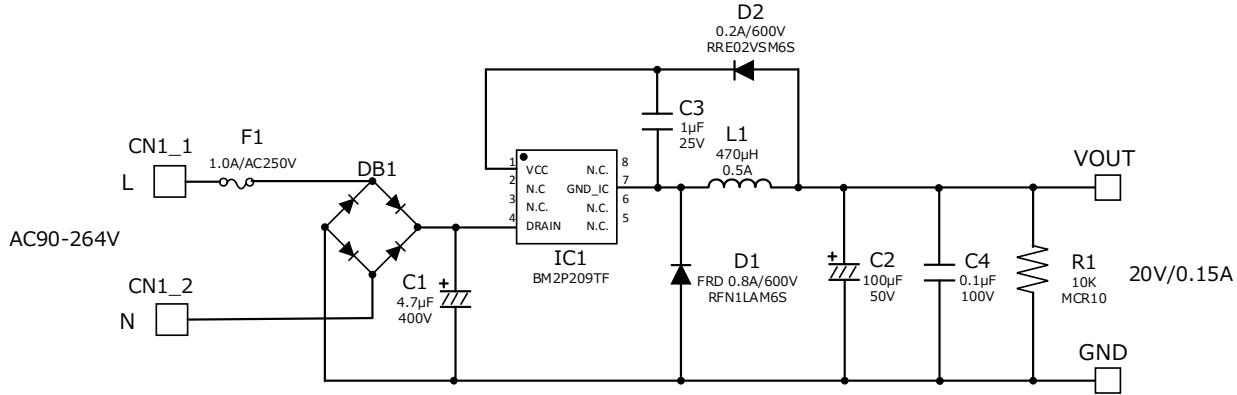


Figure 23. BM2P209TF-EVK-001 Schematics

Bill of Materials

Table 7. BoM of BM2P209TF-EVK-001

Part Reference	Qty.	Type	Value	Description	Part Number	Manufacture	Configuration mm (inch)
C1	1	Electrolytic	4.7 µF	400 V, ±20%	860 021 374 008	Wurth	-
C2	1	Electrolytic	100 µF	50 V, ±20%	860 080 674 009	Wurth	-
C3	1	Ceramic	1 µF	25 V, X7R, ±20%	TMK107B7105MA-T	Taiyo Yuden	1608 (0603)
C4	1	Ceramic	0.1 µF	100 V, X7R, ±20%	HMK107B7104MA-T	Taiyo Yuden	1608 (0603)
CN1	1	Connector	-	2pin	B2P-VH	JST	-
D1	1	FRD	0.8 A	600 V	RFN1LAM6S	ROHM	PMDS
D2	1	Diode	0.2 A	600 V	RRE02VSM6S	ROHM	TUMD2SM
DB1	1	Bridge	1 A	800 V	D1UBA80-7062	Shindengen	SOPA-4
F1	1	Fuse	1 A	250 V	39211000000	Littelfuse	-
IC1	1	AC/DC Converter	-	-	BM2P209TF	ROHM	SOP8
L1	1	Coil	470 µH	0.5 A	744 747 147 1	Wurth	-
R1	1	Resistor	10k Ω	0.1 W, ±5%	MCR10EZPJ103	ROHM	2012 (0805)

Layout

Size: 18 mm x 40 mm

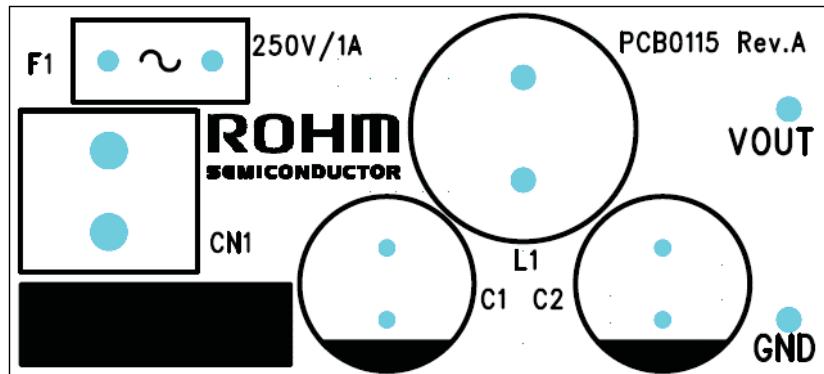


Figure 24. TOP Silkscreen (Top view)

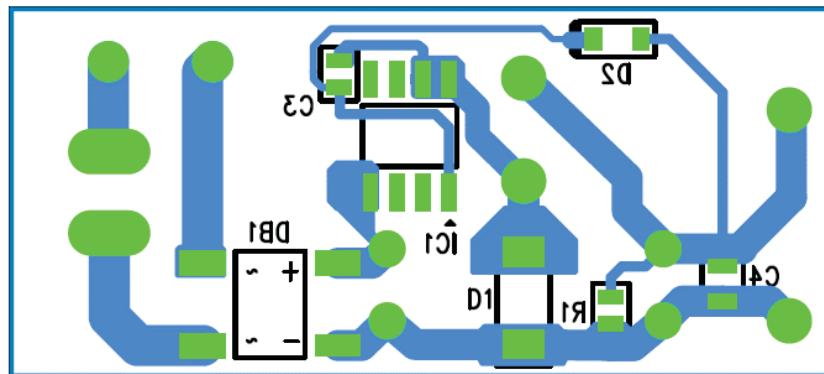


Figure 25. Bottom Layout (TOP View)

Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products specified in this document are not designed to be radiation tolerant.
- 7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 10) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting from non-compliance with any applicable laws or regulations.
- 12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[BM2P209TF-EVK-001](#)