


COAXIAL CONNECTOR, SMA, 50 Ohm, Straight cable jack (female)

21_SMA-50-3-18/111_Y

Properties

- Excellent return loss
- Intermateable with PC3.5 and SK
- Applicable in frequencies up to 18 GHz

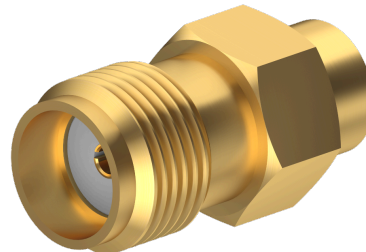

Product configuration		
Interface type	Gender	Standard
SMA	jack	IEC 60169-15_MIL-STD-348A/310_CECC 22110

Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	SUCOPRO Plating
Outer conductor	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	PFA / PTFE	

Electrical data	
Impedance	50 Ω
Interface frequency	18 GHz

Mechanical data	
Weight	0.002 kg
Mating cycles	500
Cable entry centre contact	soldered
Cable entry outer contact	soldered

Environmental data	
Operation temperature	-65 °C ... 165 °C

COAXIAL CONNECTOR, SMA, 50 Ohm, Straight cable jack (female)

21_SMA-50-3-18/111_Y

Material compliance			
Item number	Directive / Regulation	Rating	Exemptions / Details
23020258	RoHS 2011/65/EU and (EU) 2015/863	Compliant with exemption	6c
	REACH 1907/2006 Article 33 SVHC	Contains one or more SVHC >0,1%	CAS: 7439-92-1 Lead

Ordering Information Table		
Item number	Item description	Packaging type
23020258	21_SMA-50-3-18/111_YH	Bulk 100 pcs

Suitable cables	
Cable group	Y5 - 3 mm / 50 Ohm
	Y17 - 3 mm / 50 Ohm
	Y12 - 3 mm / 50 Ohm
Suitable cables	SUCOFORM_141
	MULTIFLEX_141

Additional Information	
Only as assembly	No

Suitable tools		
Item number	Item description	Type of tool
22544715	74_Z-0-0-68	Knives / Blades
23024588	74_Z-0-0-442	Soldering tool
23021264	74_Z-0-0-368	Locator
22643028	74_Z-0-0-164	Trimming tool
22643029	74_Z-0-0-157	Cable stripping tool
23019268	74_Z-0-0-364/---_E	Support
23019269	74_Z-0-0-365	Support

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/ EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2851 / Date of publication: 11.07.2025 / uncontrolled copy