


COAXIAL CONNECTOR, SHV, 50 Ohm, Straight bulkhead receptacle, jack (female)

22_SHV-50-0-6/133_N

Properties

- Suitable for all high voltage applications up to 5 kV DC or 3.5 kV rms
- Used in nuclear instruments or test and measurement equipment
- Voltages are valid for both, the mated and the unmated condition.

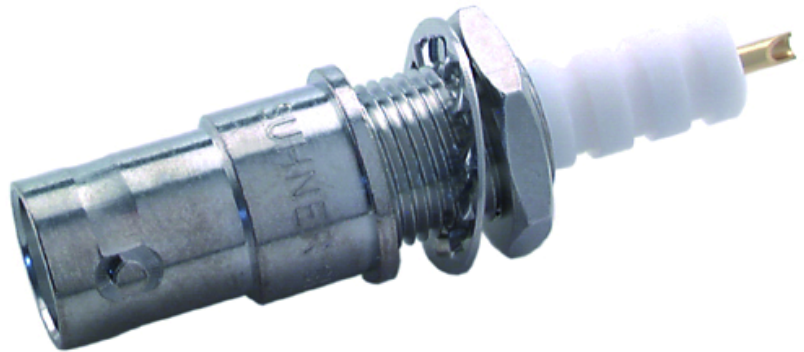

Product configuration

Interface type	Gender	Standard
SHV	jack	IEC 60498_MIL-STD-348A/314

Interface and material data

Piece parts	Material	Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PS (Polystyrene)	
Fastening nut	Brass	SUCOPLATE (R) Plating
Washer	Bronze	SUCOPLATE (R) Plating

Electrical data

Impedance	50 Ω
Interface frequency	0.3 GHz

Mechanical data

Weight	0.0111 kg
Mating cycles	500
Chassis torque	2 N
Flange type	round flange / dia. 12.5
Tab style	solder end

Environmental data

Operation temperature	-55 °C ... 100 °C
-----------------------	-------------------

COAXIAL CONNECTOR, SHV, 50 Ohm, Straight bulkhead receptacle, jack (female)
22_SHV-50-0-6/133_N

Material compliance			
Item number	Directive / Regulation	Rating	Exemptions / Details
22542007	RoHS 2011/65/EU and (EU) 2015/863	Compliant with exemption	6c
	REACH 1907/2006 Article 33 SVHC	Contains one or more SVHC >0,1%	CAS: 7439-92-1 Lead
Ordering Information Table			
Item number	Item description		Packaging type
22542007	22_SHV-50-0-6/133_NE		Single

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/ EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2782 / Date of publication: 12.07.2025 / uncontrolled copy