

# URB12200

## Technical Datasheet



**LITHIUMPOWER®**

### Li-Ion LFP Benefits Over SLA

- Uniform voltage during discharge
- No need to provide trickle charging to retain battery's charge
- Significantly lighter weight for the same amount of energy
- Battery does not outgas during use
- Nominal voltage is maintained over a wider temperature range

### Features

- Integrated carry handles
- Can be properly charged using a 2 phase SLA charger
- IEC 62133, 2nd edition compliant

### Applications

- Scooters / wheelchairs
- UPS battery replacement
- Solar battery


### Technical Specifications

<b>Part No</b>	URB12200	
<b>Chemistry</b>	Lithium Iron Phosphate (LFP)	
<b>IEC Designation</b>	4IFR19/66-13	
<b>Average Voltage</b>	12.8V	
<b>Nominal Capacity<sup>1</sup></b>	21.6Ah	
<b>Voltage Range</b>	10.0V - 14.4V	
<b>Max. Continuous Discharge</b>	20.0A	
<b>Max. Pulse Discharge<sup>2</sup></b>	120 ± 20A	
<b>Energy<sup>1</sup></b>	276Wh	
<b>Energy Density</b>	102Wh/kg, 121Wh/l	
<b>Weight</b>	Approx. 2.7 ± 0.2kg (5.95 ± 0.44lbs)	
<b>Cycle Life<sup>3</sup></b>	>1,500 cycles	
<b>Operating Temperature</b>	-20°C to +60°C discharging 0°C to +45°C charging	
<b>Storage Temperature</b>	0°C to +40°C	
<b>Internal Resistance</b>	≤50mΩ	
<b>Self-Discharge @ +23°C</b>	<5% per month	
<b>Memory Effect</b>	None	
<b>Exterior/Housing</b>	Hard plastic, ABS	
<b>Terminals/Connector</b>	M5 Screw Terminals (Torque 3.5-4.5N·m)	
<b>Size</b>	Length:	181 ± 1mm (7.12in)
	Width:	76 ± 1mm (3.03in)
	Height:	165 ± 1mm (6.57in)
<b>Communications</b>	None	
<b>State of Charge Indicator</b>	None	
<b>Protection</b>	Overcharge:	3.90V (per cell)
	Over Discharge	2.00V (per cell)
	Over Current:	120 ± 20A (5-20ms)
	Over Temperature:	65 ± 5°C
	Short Circuit	
	Cell Imbalance	
<b>Charging</b>	Connect the battery to a DC power source using correct polarity and apply a maximum voltage of 14.4V. Limit the current to the recommended rate of 4.0A and hold 14.4V until the current declines to 400mA. Maximum charge rate is 20.0A. Alternatively, you may apply a maximum charge voltage of 13.6V (limiting the current to 4.0A) and hold indefinitely to maintain the battery in a continuous standby state-of-charge of between 70-90%.	
<b>Safety</b>	Material Safety Datasheet - MSDS00152 Refer also to Safety Guide UBM-5112	
<b>Certification</b>	CB Scheme (ID: JPTUV-152254) UL 2054	
<b>Transportation<sup>4</sup></b>	UN 3480 Dangerous Good Class 9, Total Energy >100Wh, <300Wh UN Testing Summary - UNTS-0269	
<b>Harmonized Tariff Schedule</b>	8507.60.0000	

### Notes

1. Using a C/5 discharge rate at +25°C.
2. Maximum pulse width of between 5ms and 20ms.
3. Number of consecutive C/5 rate discharges and recommended charges at +25±5°C until the battery reaches 80% of initial capacity.
4. Transportation regulations, classifications and lithium content are available on the Ultralife website

## Dimensions

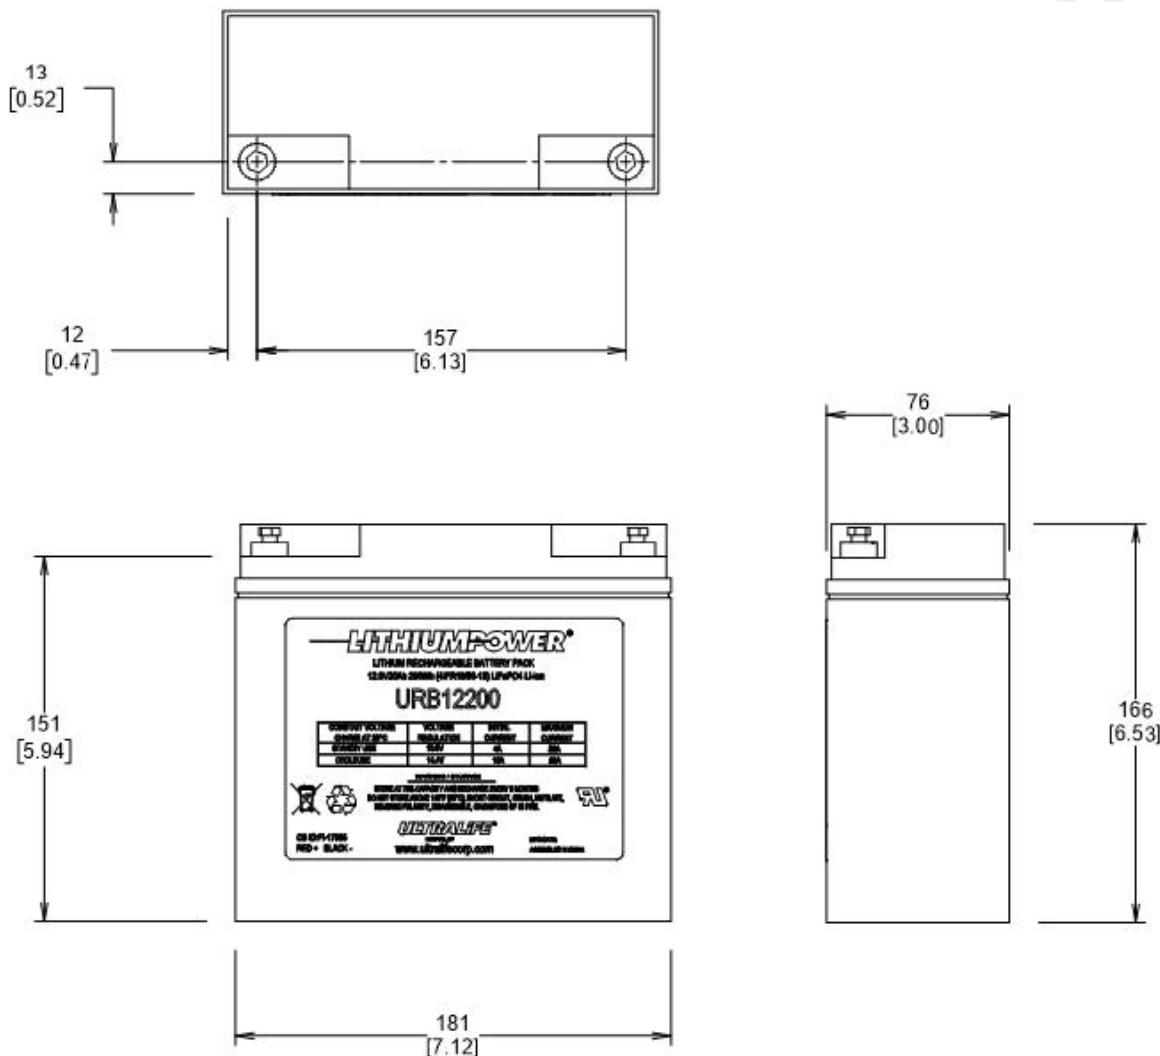

Unit: mm [in]

URB12200

Newark, New York | +1 315-332-7100 | Fax: +1 315-331-7800

©2025 Ultralife Corporation • [www.ultralifecorp.com](http://www.ultralifecorp.com) • All information is subject to change without notice.

The information contained herein is for reference only and does not constitute a warranty of performance. • 28 OCT 25 UBM-0099 Rev: F