

# Product data sheet

Specifications



Push button flush mounted,  
Harmony XB5, plastic, blue, 30mm,  
spring return, unmarked, 1NO

XB5FA61

## Main

|                               |                                                                                                                                                                                                     |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XB5                                                                                                                                                                                         |
| Product or component type     | Push-button                                                                                                                                                                                         |
| Device short name             | XB5F                                                                                                                                                                                                |
| Product compatibility         | ZBYF2101<br>ZBYF4101<br>ZBYF6101<br>ZBYF6102<br>ZBZF32<br>ZBZF33<br>ZB4FBZ007                                                                                                                       |
| Bezel material                | Plastic<br>Dark grey plastic                                                                                                                                                                        |
| Head type                     | Built-in-flush                                                                                                                                                                                      |
| Fixing collar material        | Plastic                                                                                                                                                                                             |
| Mounting diameter             | 30.5 mm                                                                                                                                                                                             |
| Sale per indivisible quantity | 1                                                                                                                                                                                                   |
| Shape of signaling unit head  | Round                                                                                                                                                                                               |
| Type of operator              | spring return                                                                                                                                                                                       |
| Operator profile              | Blue flush, unmarked                                                                                                                                                                                |
| Contacts type and composition | 1 NO                                                                                                                                                                                                |
| Contact operation             | Slow-break                                                                                                                                                                                          |
| Connections - terminals       | Screw clamp terminals, <= 2 x 1.5 mm <sup>2</sup> with cable end conforming to IEC 60947-1<br>Screw clamp terminals, 1 x 0.22...2 x 2.5 mm <sup>2</sup> without cable end conforming to IEC 60947-1 |

## Complementary

|                                    |                                                                |
|------------------------------------|----------------------------------------------------------------|
| Height                             | 42 mm                                                          |
| Width                              | 36.6 mm                                                        |
| Depth                              | 55 mm                                                          |
| Terminals description ISO n°1      | (13-14)NO                                                      |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m                          |
| Contacts usage                     | Standard contacts                                              |
| Positive opening                   | Without                                                        |
| Operating travel                   | 2.6 mm (NO changing electrical state)<br>4.3 mm (total travel) |
| Operating force                    | 3.8 N NO changing electrical state                             |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mechanical durability                       | 10000000 cycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Tightening torque                           | 0.8...1.2 N.m conforming to IEC 60947-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Shape of screw head                         | Cross compatible with Philips no 1 screwdriver<br>Cross compatible with pozidriv No 1 screwdriver<br>Slotted compatible with flat Ø 4 mm screwdriver<br>Slotted compatible with flat Ø 5.5 mm screwdriver                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Contacts material                           | Silver alloy (Ag/Ni)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Short-circuit protection                    | 10 A cartridge fuse type gG conforming to IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| [Ith] conventional free air thermal current | 10 A conforming to IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| [Ui] rated insulation voltage               | 600 V (pollution degree 3) conforming to IEC 60947-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| [Uimp] rated impulse withstand voltage      | 6 kV conforming to IEC 60947-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| [Ie] rated operational current              | 3 A at 240 V, AC-15, A600 conforming to IEC 60947-5-1<br>6 A at 120 V, AC-15, A600 conforming to IEC 60947-5-1<br>0.1 A at 600 V, DC-13, Q600 conforming to IEC 60947-5-1<br>0.27 A at 250 V, DC-13, Q600 conforming to IEC 60947-5-1<br>0.55 A at 125 V, DC-13, Q600 conforming to IEC 60947-5-1<br>1.2 A at 600 V, AC-15, A600 conforming to IEC 60947-5-1                                                                                                                                                                                                                                                                               |
| Electrical durability                       | 1000000 cycles AC-15, 2 A at 230 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1: appendix C<br>1000000 cycles AC-15, 3 A at 120 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1: appendix C<br>1000000 cycles AC-15, 4 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1: appendix C<br>1000000 cycles DC-13, 0.2 A at 110 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1: appendix C<br>1000000 cycles DC-13, 0.5 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1: appendix C |
| Electrical reliability                      | $\Lambda < 10\exp(-6)$ at 5 V and 1 mA in clean environment conforming to IEC 60947-5-4<br>$\Lambda < 10\exp(-8)$ at 17 V and 5 mA in clean environment conforming to IEC 60947-5-4                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Device presentation                         | Complete product                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Customizable                                | No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Customizable                                | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| GCR BRIDGE                                  | XB5FACUST01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Compatibility code                          | XB5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## Environment

|                                       |                                                                                                                                                                                          |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                                                                                                       |
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                              |
| Ambient air temperature for operation | -40...70 °C                                                                                                                                                                              |
| Overvoltage category                  | Class II conforming to IEC 60536                                                                                                                                                         |
| IP degree of protection               | IP66 conforming to IEC 60529<br>IP67<br>IP69<br>IP69K<br>Type 13 conforming to UL 50 E<br>Type 12 conforming to UL 50 E<br>Type 4 conforming to UL 50 E<br>Type 4X conforming to UL 50 E |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                                                                                       |
| IK degree of protection               | IK03 conforming to IEC 50102                                                                                                                                                             |

|                        |                                                                                                                                                                                                                                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards              | IEC 60947-1<br>UL 508<br>JIS C8201-5-1<br>IEC 60947-5-4<br>IEC 60947-5-1<br>CSA C22.2 No 14<br>JIS C8201-1<br>ISO 22196:2011<br>ISO 21702                                                                                                                           |
| Product certifications | UL listed<br>CSA                                                                                                                                                                                                                                                    |
| Vibration resistance   | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6<br>2 mm peak to peak (f= 2...10 Hz) conforming to IEC 60068-2-6                                                                                                                                                    |
| Shock resistance       | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>25 gn (duration = 6 ms) for 1000 shocks on each axis conforming to IEC 60068-2-27 |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 4.3 cm   |
| Package 1 Width              | 5.3 cm   |
| Package 1 Length             | 8.6 cm   |
| Package 1 Weight             | 43.0 g   |
| Unit Type of Package 2       | S02      |
| Number of Units in Package 2 | 40       |
| Package 2 Height             | 15.0 cm  |
| Package 2 Width              | 30.0 cm  |
| Package 2 Length             | 40.0 cm  |
| Package 2 Weight             | 2.015 kg |

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

| Environmental footprint          |                                               |
|----------------------------------|-----------------------------------------------|
| Total lifecycle Carbon footprint | 1                                             |
| Environmental Disclosure         | <a href="#">Product Environmental Profile</a> |

Use Better


| Materials and Substances               |                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                                                                                                                                                                                                                                                                                                                    |
| Packaging without single use plastic   | Yes                                                                                                                                                                                                                                                                                                                                                                    |
| <a href="#">EU RoHS Directive</a>      | Pro-active compliance (Product out of EU RoHS legal scope)                                                                                                                                                                                                                                                                                                             |
| REACH Regulation                       | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                                                                                                      |
| California proposition 65              | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |

Use Again

| Repack and remanufacture        |                                                                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| End of life manual availability | <a href="#">End of Life Information</a>                                                                                                                                                                         |
| Take-back                       | No                                                                                                                                                                                                              |
| WEEE Label                      |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Dimensions Drawings

Dimensions

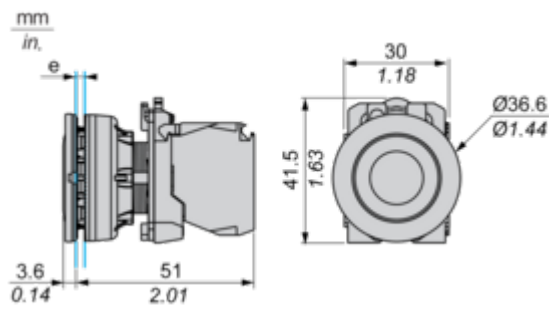


e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors

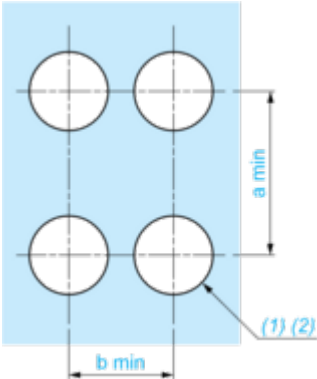

- (1) Diameter on finished panel or support  
(2)  $\varnothing 30.75\text{ mm}$  recommended ( $\varnothing 30.5\text{ mm}^{+0.5}_0$ ) /  $\varnothing 1.21\text{ in.}$  recommended ( $\varnothing 1.20\text{ in.}^{+0.0196}_0$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 40      | 1.57     |
| By Faston connectors                          | 45      | 1.77     | 40      | 1.57     |

Technical Description

Electrical Composition Corresponding to Code C1

---




Electrical Composition Corresponding to Code C2

---






Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15

---


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

---

Single contact



Double contact



Light block



Possible location



Technical Illustration

Dimensions

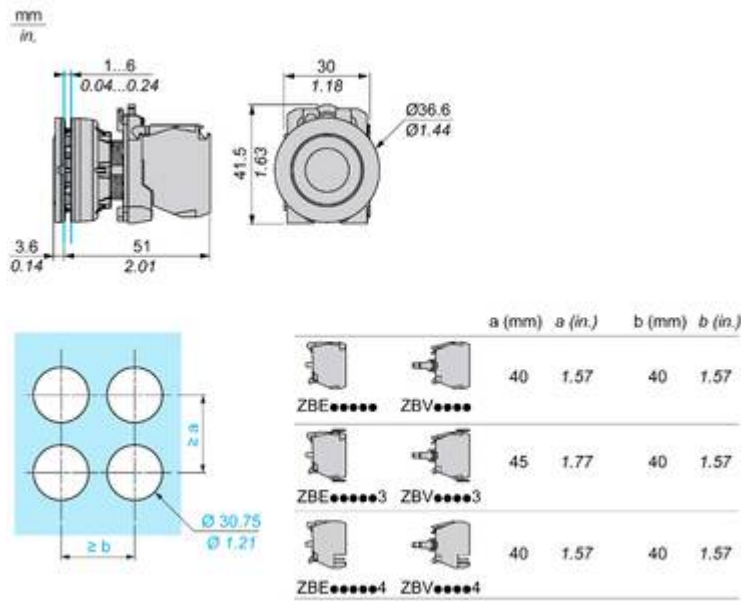


Image of product / Alternate images

Alternative

---

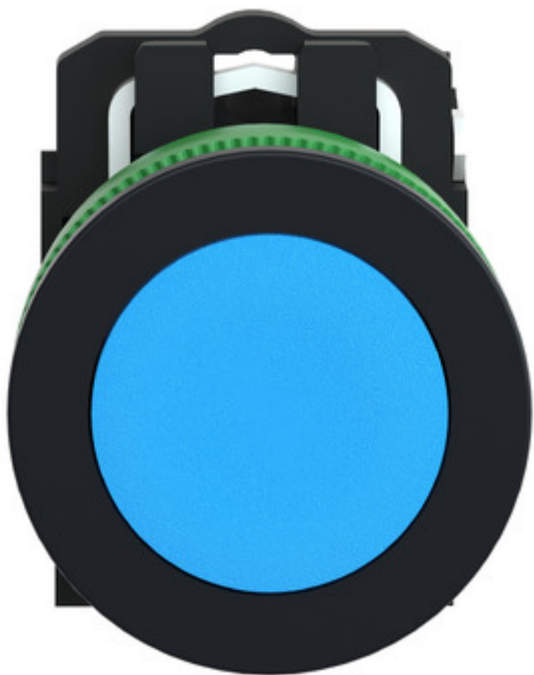




Image of product in real life situation

