

# Product data sheet

Specifications



Monolithic illuminated push button,  
Harmony XB7, plastic, red, 22mm,  
integral LED, spring return,  
110...120V AC, 1NO

XB7NW34G1

Product availability: Stock - Normally stocked in distribution facility

## Main

|                               |                                                                                                                                                 |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of Product              | Harmony XB7                                                                                                                                     |
| Product or Component Type     | Illuminated push-button                                                                                                                         |
| Device short name             | XB7                                                                                                                                             |
| Mounting diameter             | 0.9 in (22 mm)                                                                                                                                  |
| Sale per indivisible quantity | 10                                                                                                                                              |
| IP degree of protection       | IP20 IEC 60529 rear face)<br>IP65 IEC 60529 front face)                                                                                         |
| Shape of signaling unit head  | Round                                                                                                                                           |
| Type of operator              | spring return                                                                                                                                   |
| Operator profile              | Red projecting, unmarked                                                                                                                        |
| Contacts type and composition | 1 NO                                                                                                                                            |
| Connections - terminals       | Screw clamp terminals, <= 2 x 1.5 mm² with cable end IEC 60947-1<br>Screw clamp terminals, 1 x 0.34...2 x 2.5 mm² without cable end IEC 60947-1 |
| Light source                  | LED                                                                                                                                             |
| Bulb base                     | Integral LED                                                                                                                                    |
| [Us] rated supply voltage     | 120 V AC 50/60 Hz                                                                                                                               |
| Device presentation           | Monolithic product                                                                                                                              |

## Complementary

|                               |                                                                                                                              |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width             | 1.1 in (29 mm)                                                                                                               |
| CAD overall height            | 1.1 in (29 mm)                                                                                                               |
| CAD overall depth             | 2.3 in (57.5 mm)                                                                                                             |
| Terminals description ISO n°1 | (13-14)NO                                                                                                                    |
| Product Weight                | 0.051 lb(US) (0.023 kg)                                                                                                      |
| Device mounting               | Fixing hole 0.9 in (22.5 mm) 22.3 +0.4/0 IEC 60947-1                                                                         |
| Fixing center                 | >= 30 x 40 mm support panel) metal 0.04...0.2 in (1...6 mm)<br>>= 30 x 40 mm support panel) plastic 0.08...0.2 in (2...6 mm) |
| Fixing mode                   | Fixing nut beneath head 17.7...21.2 lbf.in (2...2.4 N.m)                                                                     |
| Contact operation             | Slow-break                                                                                                                   |
| Positive opening              | With (only NO)                                                                                                               |
| Mechanical durability         | 300000 cycles                                                                                                                |
| Tightening torque             | 7.08...10.6 lbf.in (0.8...1.2 N.m) IEC 60947-1                                                                               |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                                        |                                                                                                                                                                                                                                                  |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape of screw head                    | Cross JIS No 1<br>Cross Philips no 1<br>Cross pozidriv No 1<br>Slotted flat Ø 4 mm<br>Slotted flat Ø 5.5 mm                                                                                                                                      |
| Short-circuit protection               | 4 A cartridge fuse gG IEC 60947-5-1                                                                                                                                                                                                              |
| [Ui] rated insulation voltage          | 250 V 3)IEC 60947-1                                                                                                                                                                                                                              |
| [Uimp] rated impulse withstand voltage | 4 kV IEC 60947-1                                                                                                                                                                                                                                 |
| [Ie] rated operational current         | 0.1 A 250 V, DC-13, R300 IEC 60947-5-1<br>0.22 A 125 V, DC-13, R300 IEC 60947-5-1<br>0.3 A 240 V, AC-14, D300 IEC 60947-5-1<br>0.6 A 120 V, AC-14, D300 IEC 60947-5-1                                                                            |
| Electrical durability                  | 1000000 cycles, DC-13, 0.3 A 24 V 216000 cyc/mn 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 0.03 A 230 V 216000 cyc/mn 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 0.09 A 240 V 108000 cyc/mn 0.5 IEC 60947-5-1 appendix C |
| Electrical reliability                 | $\Lambda \leq 10\exp(-6)$ 17 V 5 mA IEC 60947-5-4                                                                                                                                                                                                |
| Signalling type                        | Steady                                                                                                                                                                                                                                           |
| Supply voltage limits                  | 100...132 V AC                                                                                                                                                                                                                                   |
| Current Consumption                    | 12...17 mA                                                                                                                                                                                                                                       |
| Service life                           | 70000 h at rated voltage and 25 °C                                                                                                                                                                                                               |

## Environment

|                                       |                                                                                                     |
|---------------------------------------|-----------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                  |
| Ambient Air Temperature for Storage   | -40...158 °F (-40...70 °C)                                                                          |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C)                                                                          |
| Electrical shock protection class     | Class II conforming to IEC 61140                                                                    |
| NEMA degree of protection             | NEMA 12 UL 50 E                                                                                     |
| Standards                             | UL 508<br>IEC 60947-1<br>CSA C22.2 No 14<br>JIS C8201-5-1<br>IEC 60947-5-1<br>JIS C8201-1           |
| Product Certifications                | CCC<br>GOST                                                                                         |
| Vibration resistance                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                    |
| Shock resistance                      | 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27<br>30 gn 18 ms) half sine wave acceleration |
| Electromagnetic emission              | Class B IEC 55011                                                                                   |

## Ordering and shipping details

|                   |               |
|-------------------|---------------|
| Category          | US10CS222464  |
| Discount Schedule | 0CS2          |
| GTIN              | 3606480470813 |
| Returnability     | Yes           |
| Country of origin | ID            |

## Packing Units

|                        |     |
|------------------------|-----|
| Unit Type of Package 1 | PCE |
|------------------------|-----|

|                              |                         |
|------------------------------|-------------------------|
| Nbr. of units in pkg.        | 1                       |
| Package 1 Height             | 2.36 in (6.000 cm)      |
| Package 1 Width              | 1.26 in (3.200 cm)      |
| Package 1 Length             | 1.26 in (3.200 cm)      |
| Package weight(Lbs)          | 0.882 oz (25.000 g)     |
| Unit Type of Package 2       | BB1                     |
| Number of Units in Package 2 | 10                      |
| Package 2 Height             | 2.36 in (6.000 cm)      |
| Package 2 Width              | 1.26 in (3.200 cm)      |
| Package 2 Length             | 1.26 in (3.200 cm)      |
| Package 2 Weight             | 8.818 oz (250.000 g)    |
| Unit Type of Package 3       | S01                     |
| Number of Units in Package 3 | 100                     |
| Package 3 Height             | 5.91 in (15.000 cm)     |
| Package 3 Width              | 5.91 in (15.000 cm)     |
| Package 3 Length             | 15.75 in (40.000 cm)    |
| Package 3 Weight             | 5.952 lb(US) (2.700 kg) |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

| Environmental footprint                        |   |
|------------------------------------------------|---|
| Carbon footprint (kg CO2 eq, Total Life cycle) | 3 |

Use Better

| Materials and Substances               |                                                                                                                                                                                                                                                                                             |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                                                                                                                                                                                                                                         |
| Packaging without single use plastic   | No                                                                                                                                                                                                                                                                                          |
| <a href="#">EU RoHS Directive</a>      | Pro-active compliance (Product out of EU RoHS legal scope)                                                                                                                                                                                                                                  |
| SCIP Number                            | Eb133e87-3df9-4bcd-b666-23e86eb33958                                                                                                                                                                                                                                                        |
| California proposition 65              | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |


Use Again

| Repack and remanufacture |                                                                                                                                                                                                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Take-back                | No                                                                                                                                                                                                               |
| WEEE Label               |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Dimensions Drawings

Illuminated Pushbutton

Dimensions

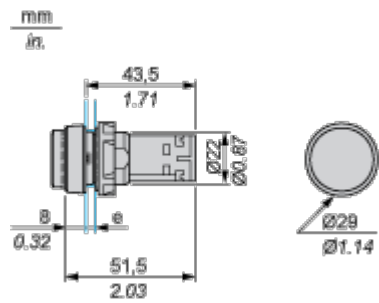

- e Support panel thickness: 1 to 6 mm/0.4 to 0.24 in. (metal), 2 to 6 mm/0.8 to 0.24 in. (plastic).

Mounting and Clearance

Mounting

Diameter of Finished Fixing Holes



- (1) Minimum value.
- (2) 40 mm/1.58 in. for Emergency switching off pushbutton only.
- (3) Standard value: Ø 22.3 (0; + 0.4) mm/Ø 0.88 (0; + 0.02) in.

“U” Type Tag Connection

---



- (1) 6.5 mm/0.26 in. recommended, 7 mm/0.28 in. max.
- (2) M3 screw clamp terminal.

Connections and Schema

Wiring

---



Offer Marketing Illustration

Product benefits / Features

---

### Features

Harmony All-in-one monolithic offers



Good resistance to chemical agents with double electrical insulation



Monolithic design - easy to select



Quick to install by eliminating the need for components



Safety compliant: Finger protected



Offer Marketing Illustration

Product benefits / Features

---



Image of product / Alternate images

Alternative

---



