

Product data sheet

Specifications



socket equipped with LED and protection circuit, Harmony Electromechanical Relays, for RSL1 relays, spring terminals, 230V AC DC

RSLZRA4

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays
Device short name	RSLZ
Product or Component Type	Socket
Device presentation	Basic element
Product compatibility	Plug-in relay RSL 1 C/O 60 V DC
Contacts type and composition	1 C/O
[Ith] conventional free air thermal current	6 A
Switching voltage	230 V AC/DC
Rated operational voltage limits	184...264.5 V
[Ue] rated operational voltage	< 300 V AC

Complementary

Group of product	RSL_SPRING_TERS_230
Shape of pin	Flat
Contact terminal arrangement	Separate
Connections - terminals	Spring terminals, 1 x 0.2...1 x 1.5 mm ² AWG 24...AWG 16) flexible with cable end Spring terminals, 1 x 0.2...1 x 1.5 mm ² AWG 24...AWG 16) solid without cable end
Compatibility code	RSLZ
Clamping force	10...40 N
Fixing mode	Plastic compression spring (35 mm symmetrical DIN rail)
[Uimp] rated impulse withstand voltage	3.6 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
CAD overall width	0.2 in (6.2 mm)
CAD overall height	3.09 in (78.6 mm)
CAD overall depth	4.0 in (101 mm)
Product Weight	0.051 lb(US) (0.023 kg)

Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

IP degree of protection	IP20 conforming to IEC 60529
Standards	IEC 61984 UL 508
Product Certifications	GOST CSA
Marking	CE
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)

Ordering and shipping details

Category	US10CP221127
Discount Schedule	OCP2
GTIN	3606480078101
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	0.31 in (0.800 cm)
Package 1 Width	3.23 in (8.200 cm)
Package 1 Length	4.13 in (10.500 cm)
Package weight(Lbs)	0.811 oz (23.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	2.83 in (7.200 cm)
Package 2 Width	3.46 in (8.800 cm)
Package 2 Length	4.33 in (11.000 cm)
Package 2 Weight	9.065 oz (257.000 g)
Unit Type of Package 3	S03
Number of Units in Package 3	300
Package 3 Height	11.81 in (30.000 cm)
Package 3 Width	11.81 in (30.000 cm)
Package 3 Length	15.75 in (40.000 cm)
Package 3 Weight	18.096 lb(US) (8.208 kg)

Contractual warranty

Warranty	18 months
----------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)

1

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

Use Again


Repack and remanufacture

Take-back


No

Dimensions Drawings

Dimensions

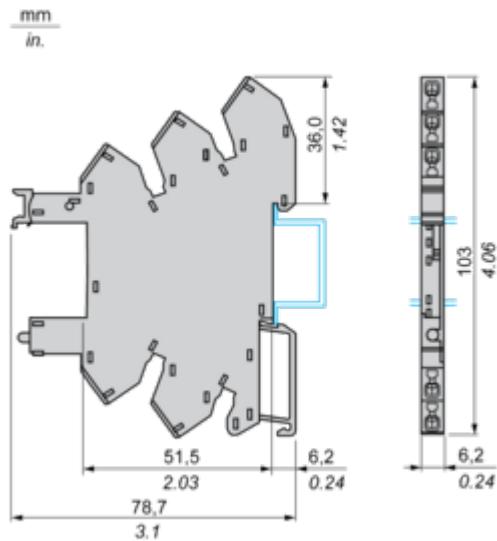


Connections and Schema

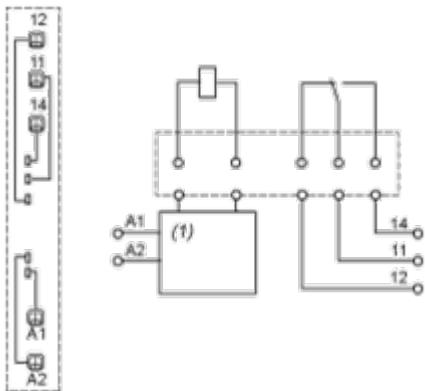Wiring Diagram

(1) Protection circuit

Example of RSLZ2 Bus Jumper Mounting on Sockets

Side View



(1) A1

(2) A2

(3) Bus jumper polarity A1

(4) Bus jumper polarity A2

Technical Illustration

Dimensions

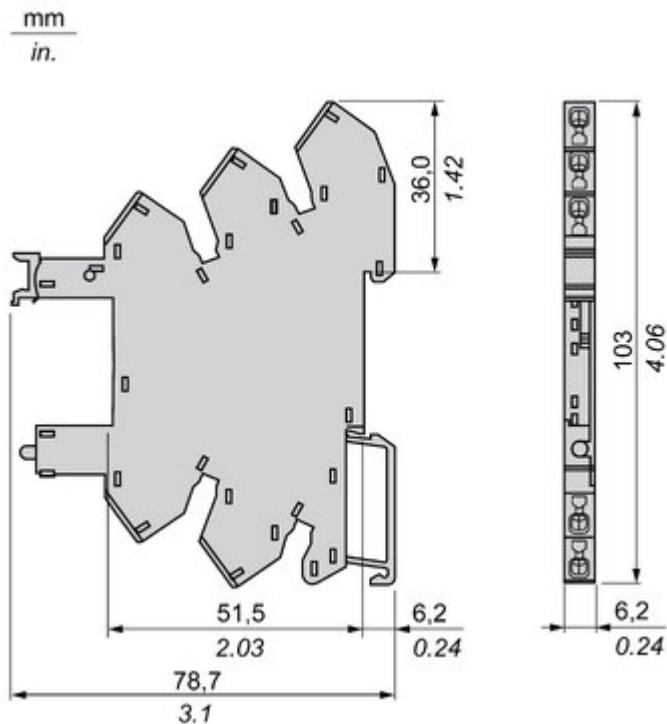


Image of product / Alternate images

Alternative



