

# Product data sheet

Specifications



Prewired rotating mirror beacon,  
Harmony XVR, 130mm, red, without  
buzzer, 24V DC

XVR13B04

## Main

|                           |                                                       |
|---------------------------|-------------------------------------------------------|
| Range of product          | Harmony XVR                                           |
| Product or component type | Prewired rotating mirror beacon                       |
| Sound signalling          | Without                                               |
| Device short name         | XVR                                                   |
| Mounting diameter         | 130 mm                                                |
| IP degree of protection   | IP66 (resistant to vibration) conforming to IEC 60529 |
| [Us] rated supply voltage | 24 V DC                                               |
| Light source              | High luminosity LED, red                              |

## Complementary

|                                        |                                                               |
|----------------------------------------|---------------------------------------------------------------|
| Material                               | ABS (acrylonitrile butadiene-styrene): body part<br>PC: globe |
| CAD overall width                      | 130 mm                                                        |
| CAD overall depth                      | 130 mm                                                        |
| Product weight                         | 0.8 kg                                                        |
| Marking                                | CE                                                            |
| Product mounting                       | By 3 M8 screws                                                |
| Supply voltage limits                  | 19...30 V DC                                                  |
| [Uimp] rated impulse withstand voltage | 0.8 kV                                                        |
| Current consumption                    | 125 mA                                                        |
| Flashing frequency                     | 2.7 Hz                                                        |
| Clamping connection capacity           | 1.25 mm²                                                      |
| AWG gauge                              | AWG 18                                                        |
| Cable length                           | 400 mm                                                        |

## Environment

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Standards                             | IEC 61000-6-2<br>IEC 61000-6-4   |
| Protective treatment                  | TC                               |
| Ambient air temperature for storage   | -35...70 °C                      |
| Ambient air temperature for operation | -30...50 °C                      |
| Electrical shock protection class     | Class II conforming to IEC 61140 |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 18.7 cm  |
| Package 1 Width              | 18.7 cm  |
| Package 1 Length             | 26.6 cm  |
| Package 1 Weight             | 1.214 kg |
| Unit Type of Package 2       | S04      |
| Number of Units in Package 2 | 6        |
| Package 2 Height             | 30.0 cm  |
| Package 2 Width              | 40.0 cm  |
| Package 2 Length             | 60.0 cm  |
| Package 2 Weight             | 8.488 kg |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

| Environmental footprint          |    |
|----------------------------------|----|
| Total lifecycle Carbon footprint | 18 |

Use Better

| Materials and Substances               |                                                                                                                                                                                                                                                                 |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                                                                                                                                                                                                             |
| Packaging without single use plastic   | No                                                                                                                                                                                                                                                              |
| <a href="#">EU RoHS Directive</a>      | Pro-active compliance (Product out of EU RoHS legal scope)                                                                                                                                                                                                      |
| California proposition 65              | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a> |


Use Again

| Repack and remanufacture |    |
|--------------------------|----|
| Take-back                | No |

Dimensions Drawings

Rotating Mirror Beacon


Dimensions

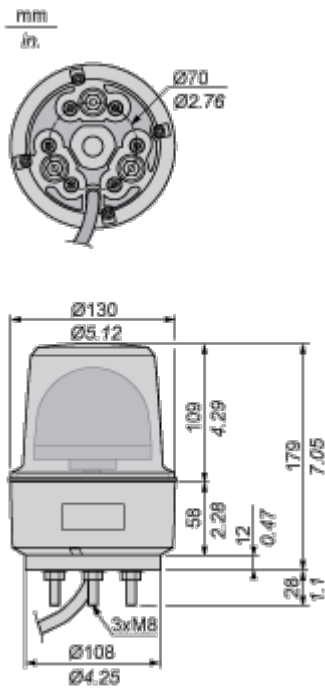

## Mounting and Clearance

### Rotating Mirror Beacon

### Panel Cut-out



Technical Illustration

Dimensions

