

# Product data sheet

Specifications



Illuminated beacon, Harmony XVB, plastic, orange, 70mm, flashing, integral flash discharge tube, 10 joule, 120V AC

XVBL8G5

⚠ To be discontinued

⚠ To be discontinued on: Jun 30, 2025

⚠ To be end-of-service on: Dec 31, 2026

**Product availability: Stock - Normally stocked in distribution facility**

## Main

Range of Product	Harmony XVB Universal
Product or Component Type	Complete beacon
Beacon or indicator bank unit type	Base unit direct or tube fixing Illuminated unit
Signalling type	Flashing
Mounting diameter	2.8 in (70 mm)
Component name	XVBL
Material	Glass reinforced polyamide: base unit Polycarbonate: illuminated unit
Light source	Integral flash discharge tube, orange
Bulb type	Flash discharge tube
[Us] rated supply voltage	120 V AC

## Complementary

Connections - terminals	Screw clamp terminals, $\leq 1 \times 1.5 \text{ mm}^2$ with cable end
[Ui] rated insulation voltage	250 V IEC 60947-1
Nominal voltage limit	0.85...1.1 Un IEC 60947-5-1
Current consumption	< 290 mA AC
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1
Flash energy	10 J
Flashing frequency	1 Hz
CAD overall width	2.8 in (70 mm)
CAD overall height	9.1 in (232 mm)
CAD overall depth	2.8 in (70 mm)
Terminals description ISO n°1	(GND)GROUND (COM-1)PW
Product Weight	1.01 lb(US) (0.46 kg)

## Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Product Certifications</b>	CCC EAC CSA C22-2 No 14 UL 508
<b>Standards</b>	IEC 60947-5-1
<b>Protective treatment</b>	TC
<b>Ambient Air Temperature for Storage</b>	-40...158 °F (-40...70 °C)
<b>Electrical shock protection class</b>	Class I on support tube IEC 61140 Class II on base unit IEC 61140
<b>IP degree of protection</b>	IP65 on fixing base XVBZ0. IEC 60529 IP66 on base unit IEC 60529
<b>NEMA degree of protection</b>	Type 4X UL indoor)

## Ordering and shipping details

<b>Category</b>	US100XV22611
<b>Discount Schedule</b>	00XV
<b>GTIN</b>	3389110844863
<b>Returnability</b>	Yes
<b>Country of origin</b>	FR

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	2.91 in (7.400 cm)
<b>Package 1 Width</b>	5.83 in (14.800 cm)
<b>Package 1 Length</b>	7.80 in (19.800 cm)
<b>Package 1 Weight</b>	16.226 oz (460.000 g)
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	12
<b>Package 2 Height</b>	11.81 in (30.000 cm)
<b>Package 2 Width</b>	11.81 in (30.000 cm)
<b>Package 2 Length</b>	15.75 in (40.000 cm)
<b>Package 2 Weight</b>	13.095 lb(US) (5.940 kg)
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	96
<b>Package 3 Height</b>	29.53 in (75.000 cm)
<b>Package 3 Width</b>	31.50 in (80.000 cm)
<b>Package 3 Length</b>	23.62 in (60.000 cm)
<b>Package 3 Weight</b>	122.401 lb(US) (55.520 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	137
--	-----

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

SCIP Number	124e2d7a-5b1e-45ca-b93c-220dd91b55b6
-------------	--------------------------------------

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	--

## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
---------------------	--

Take-back	No
-----------	----


WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
------	--

Dimensions Drawings

Illuminated Beacon with "Flash" Discharge Tube Unit

---

Dimensions

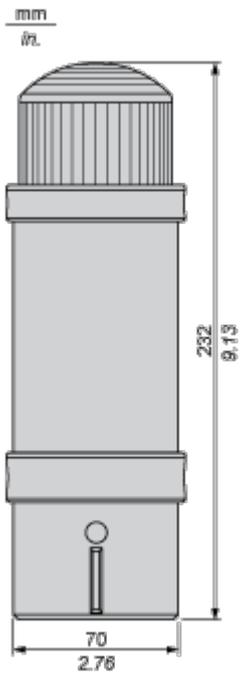


Connections and Schema

Illuminated Beacon

---


Wiring Diagram



Technical Illustration

Dimensions


---

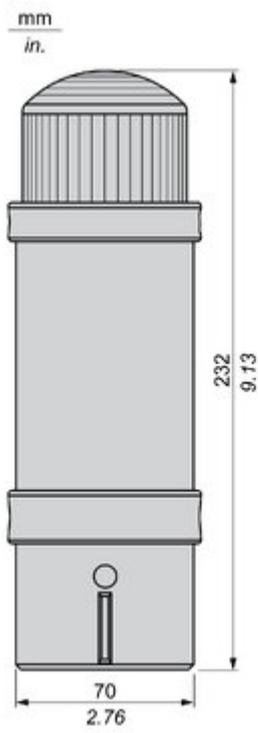

Technical Illustration

Wiring diagram

---

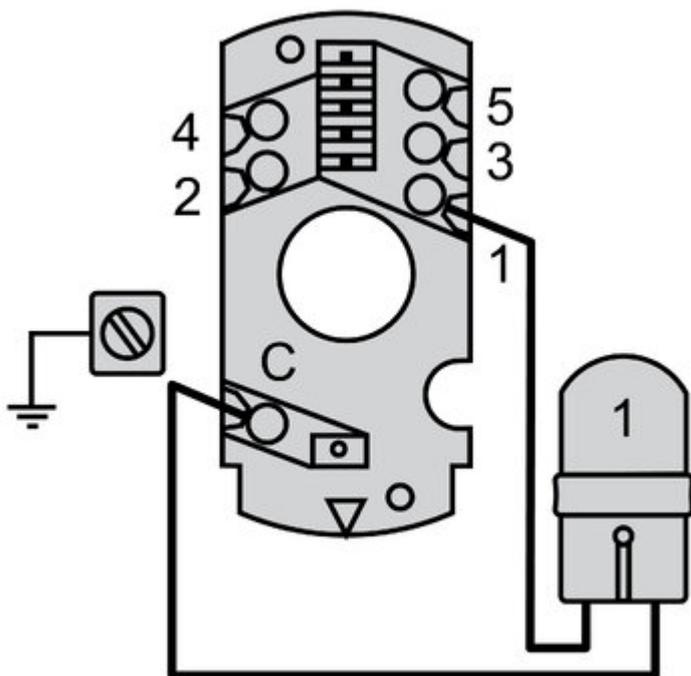

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Harmony XVB

Robust product performance with high IP protection and IK05 shock resistance



Conformity with International standards



Greater loudness up to 90dB with continuous and intermittent tones



Beacon lens on top with high intensity 5J, 10J Xenon flash, increase visibility from top and surrounding



Offer Marketing Illustration

Product benefits / Features

---

The infographic features a central image of two light fixtures: a tall, multi-colored lens unit and a shorter, single-colored unit. Surrounding this central image are five circular icons, each with a corresponding text block describing a feature. The background is a solid green color.

### Features Harmony XVB

- Light Source:** 3 types of light source: 10-Watt incandescent bulb, built-in high-efficiency LEDs, 5 and 10-joule discharge tube
- Lifespan:** 100,000 hours of maintenance-free lighting thanks to "LED Protected" technology
- Protection:** High degree of protection (IP66) and Shock resistance (IK05)
- Flexibility:** Fully flexible and interchangeable construction of up to 5 lens units (six colors of light lens unit)
- Connector:** Connector with removable base, axial, or side cable entry, immediate assembly, and fixing using a locking ring

Image of product / Alternate images

Alternative

---





