

# Product data sheet

Specifications

SQUARE D



Circuit breaker, PowerPact B, 60A, 3 pole, 600Y/347VAC, 14kA, lugs, thermal magnetic, 80%

BDL36060

Product availability: Stock - Normally stocked in distribution facility

## Main

Range	PowerPact
Product name	PowerPact B
Device short name	BD 060
Product or Component Type	Circuit breaker
Device Application	Distribution

## Complementary

Line Rated Current	60 A
Number of Poles	3P
Control Type	Toggle
Breaking capacity code	D
Breaking capacity	25 kA 208Y/120 V AC 50/60 Hz UL 489 25 kA 240 V AC 50/60 Hz UL 489 18 kA 480/277 V AC 50/60 Hz UL 489 18 kA 480 V AC 50/60 Hz UL 489 14 kA 600Y/347 V AC 50/60 Hz UL 489 10 kA 250 V DC UL 489
[Ue] rated operational voltage	525 V AC 50/60 Hz UL 489
Network Frequency	50/60 Hz
[Ics] rated service breaking capacity	25 kA 220...240 V AC 50/60 Hz IEC 60947-2 14 kA 500...525 V AC 50/60 Hz IEC 60947-2 18 kA 380...415 V AC 50/60 Hz IEC 60947-2 18 kA 440 V AC 50/60 Hz IEC 60947-2
[Uimp] rated impulse withstand voltage	8 kV IEC 60947-2
Trip unit technology	Thermal-magnetic
Continuous current rating	80 %
[Ui] rated insulation voltage	800 V IEC 60947-2
Suitability for isolation	Yes IEC 60947-2
Utilisation category	Category A
Mechanical durability	20000 cycles IEC 947-1 Annex K ed 5.2
Electrical durability	10000 cycles IEC 947-1 Annex K ed 5.2 440 V In
Connection pitch	1.06 in (27 mm)
AWG gauge	AWG 6...AWG 2/0 fine stranded aluminium/copper AWG 14...AWG 3/0 rigid or stranded aluminium/copper
Local signalling	Presence of auxiliary contacts flag green)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Mounting mode</b>	Clip-on 35 x 15 mm symmetrical DIN rail) By screws plate)
<b>Electrical connection</b>	Everlink lug, line Everlink lug, load
<b>Tightening torque</b>	44.3 lbf.in (5 N.m) 0.004...0.02 in <sup>2</sup> (2.5...16 mm <sup>2</sup> ) (AWG 14...AWG 4) 79.7 lbf.in (9 N.m) 0.04...0.1 in <sup>2</sup> (25...95 mm <sup>2</sup> ) (AWG 3...AWG 3/0)
<b>Number of slots</b>	1 auxiliary switch OF plug-in) 1 voltage release MN or MX plug-in) 1 alarm switch SD plug-in)
<b>Power wire stripping length</b>	0.8 in (20 mm)
<b>Color</b>	Gray RAL 7016)
<b>9 mm pitches</b>	9
<b>Height</b>	5.4 in (137 mm)
<b>Width</b>	3.2 in (81 mm)
<b>Depth</b>	3.1 in (80 mm)
<b>Net Weight</b>	2.368 lb(US) (1.074 kg)
<b>Quantity per Set</b>	Set of 1
<b>Circuit breaker application</b>	HACR rated

## Environment

<b>Quality labels</b>	CE
<b>Standards</b>	GB 14048.2 EN/IEC 60947-2 CSA C22.2 No 5 EN/IEC 60947-5-1 NEMA AB1 UL 489 NMX J-266
<b>Product certifications</b>	UL IEC CCC EAC CSA NOM
<b>IP degree of protection</b>	Front cover IP40 IEC 60529
<b>IK degree of protection</b>	IK07 conforming to IEC 62262
<b>Pollution degree</b>	3 IEC 60947-1
<b>Ambient air temperature for operation</b>	-13...158 °F (-25...70 °C)
<b>Ambient Air Temperature for Storage</b>	-58...185 °F (-50...85 °C)
<b>Operating altitude</b>	< 6561.68 ft (2000 m) without derating 5000 m with derating

## Ordering and shipping details

<b>Category</b>	US10DE201130
<b>Discount Schedule</b>	ODE2
<b>GTIN</b>	3606481153135
<b>Returnability</b>	Yes
<b>Country of origin</b>	US

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	3.50 in (8.890 cm)
<b>Package 1 Width</b>	7.00 in (17.780 cm)
<b>Package 1 Length</b>	10.50 in (26.670 cm)
<b>Package weight(Lbs)</b>	2.941 lb(US) (1.334 kg)



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	227
--	-----

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
--------------------------	---

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
-----------------------------------	---------------------------

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	---

Halogen content performance	Halogen free product
-----------------------------	----------------------

PVC free	Yes
----------	-----

## Use Again


### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
---------------------	--

Take-back	No
-----------	----

## Technical Illustration

## Dimensions

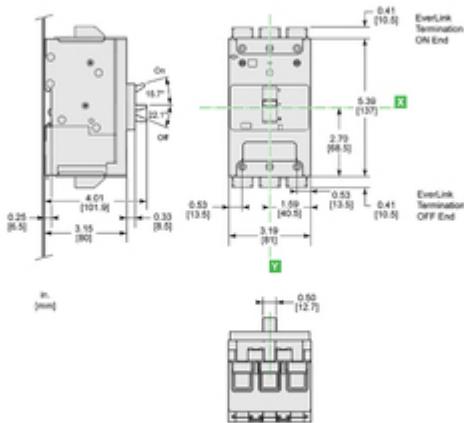

(L) TERMINATION OPTION - EverLink (ON end) / EverLink (OFF end)  
ALL DIMENSIONS ARE APPROXIMATE.  
ALSO REFER TO CAD, TECHNICAL DRAWINGS, AND DOCUMENTATION