

Product data sheet

Specifications



Rotating beacon, Harmony XVR,
130mm, red, without buzzer, 24V
AC DC

XVR13B04L

Main

| | |
|---------------------------|--|
| Range of product | Harmony XVR |
| Product or component type | Prewired rotating mirror beacon |
| Sound signalling | Without |
| Device short name | XVR |
| Mounting diameter | 130 mm |
| IP degree of protection | IP66 conforming to IEC 60529 IP67 conforming to IEC 60529 |
| [Us] rated supply voltage | 24 V AC/DC |
| Light source | High luminosity LED, red |

Complementary

| | |
|---|---|
| Material | ABS (acrylonitrile butadiene-styrene): body part PC: globe |
| CAD overall width | 130 mm |
| CAD overall depth | 130 mm |
| Product weight | 0.82 kg |
| Marking | CE |
| Product mounting | By 3 M6 screws |
| [Uiimp] rated impulse withstand voltage | 0.8 kV |
| Current consumption | 125 mA |
| Flashing frequency | 2.7 Hz |
| Clamping connection capacity | 1.25 mm ² |
| AWG gauge | AWG 18 |
| Cable length | 400 mm |

Environment

| | |
|---------------------------------------|----------------------------------|
| Standards | IEC 61000-6-2 IEC 61000-6-4 |
| Protective treatment | TC |
| Ambient air temperature for storage | -35...70 °C |
| Ambient air temperature for operation | -30...50 °C |
| Electrical shock protection class | Class II conforming to IEC 61140 |

Packing Units

| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 26.5 cm |
| Package 1 Width | 18.7 cm |
| Package 1 Length | 18.8 cm |
| Package 1 Weight | 2.494 kg |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 6 |
| Package 2 Height | 30.0 cm |
| Package 2 Width | 40.0 cm |
| Package 2 Length | 60.0 cm |
| Package 2 Weight | 7.996 kg |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint

28

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

Use Again

Repack and remanufacture


Take-back

No

Dimensions Drawings

Rotating Mirror Beacon


Dimensions

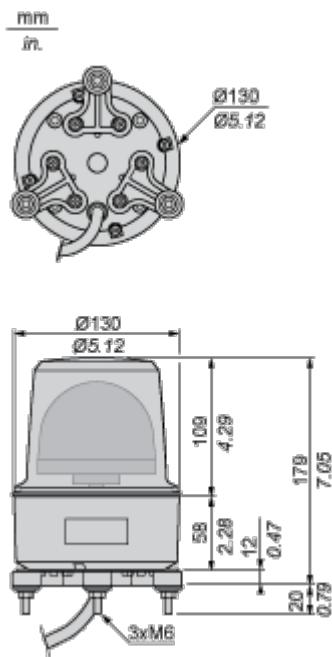

Mounting and Clearance

Rotating Mirror Beacon

Panel Cut-out

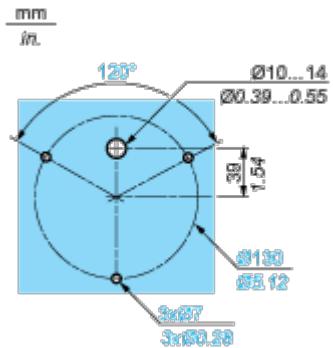

Technical Illustration

Dimensions

