

# Product data sheet

Specifications



## safety module, Harmony XPSU, Cat 1, potential free 2 NC, NO NC, 2 PNP, 24V AC or DC, spring

XPSUAB11CC

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Main

Range of Product	Harmony Safety Automation
Product or Component Type	Safety module
Safety module name	XPSUAB
Safety module application	For electrical monitoring of two-hand control stations For application with safety switchover contact For emergency stop, guard and light curtain monitoring Monitoring antivalent contacts
Function of module	Emergency stop monitoring 1-channel wiring Guard monitoring 1-channel wiring Monitoring 1 PNP sensor Monitoring two-hand control station type IIIA Magnetic switch monitoring Light curtain monitoring RFID switch Monitoring of electro-sensitive protection equipment (ESPE) Proximity sensor monitoring
Safety level	Can reach PL = c ISO 13849-1 Can reach SILCL 1 IEC 62061 Can reach SIL 1 IEC 61508
Safety reliability data	MTTFd $\geq$ 30 years ISO 13849-1 Dcavg < 60 % ISO 13849-1 PFHd = 1177E-09 1/h ISO 13849-1 HFT = 0 IEC 62061 PFHd = 1177E-09 1/h IEC 62061 SFF > 60% IEC 62061 HFT=0 IEC 61508-1 PFHd = 1177E-09 1/h IEC 61508-1 SFF > 60% IEC 61508-1 Type = B IEC 61508-1
Electrical circuit type	NC pair PNP pair Antivalent pair OSSD pair
Connections - terminals	Removable spring terminal block, 0.2...2.5 mm <sup>2</sup> solid or flexible Removable spring terminal block, 0.25...2.5 mm <sup>2</sup> flexible with ferrule single conductor Removable spring terminal block, 0.2...1.5 mm <sup>2</sup> solid or flexible twin conductor Removable spring terminal block, 2 x 0.25...1 mm <sup>2</sup> flexible with ferrule without cable end, with bezel Removable spring terminal block, 2 x 0.5...1.5 mm <sup>2</sup> flexible with ferrule with cable end, with bezel
[Us] Rated Supply Voltage	24 V AC - 15...10 % 24 V DC - 20...20 %

### Complementary

Synchronisation time between inputs	0.5 s 2.2 s
Type of start	Automatic/manual/monitored

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Power consumption in W</b>	1.5 W 24 V DC
<b>Power consumption in VA</b>	3.5 VA 24 V AC 50/60 Hz
<b>Input protection type</b>	Internal, electronic
<b>safety outputs</b>	1 C/O
<b>safety inputs</b>	1 safety input 24 V DC 5 mA
<b>maximum wire resistance</b>	500 Ohm
<b>Input compatibility</b>	Normally closed circuit ISO 14119 XC limit switch ISO 14119 Mechanical contact ISO 14119 Normally closed circuit ISO 13850 Antivalent pair ISO 14119 OSSD pair IEC 61496-1-2 Two-hand control EN 574/ISO 13851-III A 3-wire proximity sensors PNP
<b>[Ie] rated operational current</b>	5 A AC-1 for normally open relay contact 3 A AC-15 for normally open relay contact 5 A DC-1 for normally open relay contact 3 A DC-13 for normally open relay contact 3 A AC-1 for normally closed relay contact 1 A AC-15 for normally closed relay contact 2 A DC-1 for normally closed relay contact 1 A DC-13 for normally closed relay contact
<b>Control Outputs</b>	2 on/off configurable pulsed output
<b>Input/output type</b>	Semiconductor pulsed diagnostic output 24 V DC, 20 mA Z1, not safety-related
<b>[Ith] conventional free air thermal current</b>	3 A
<b>Associated fuse rating</b>	6 A gG relay output IEC 60947-1
<b>Minimum output current</b>	10 mA relay output
<b>Minimum output voltage</b>	15 V relay output
<b>Maximum response time on input open</b>	20 ms
<b>[Ui] rated insulation voltage</b>	250 V 2)IEC 60947-1
<b>[Uimp] rated impulse withstand voltage</b>	4 kV II IEC 60947-1
<b>Local signalling</b>	LED (green) for power ON LED (red) for error LED (yellow) for start LED (yellow) for safety status LED (yellow) for safety input S12 LED (yellow) for safety input S13
<b>Mounting Support</b>	35 mm symmetrical DIN rail
<b>Depth</b>	4.7 in (120 mm)
<b>Ambient Air Temperature for Operation</b>	-13...131 °F (-25...55 °C)
<b>Height</b>	3.9 in (100 mm)
<b>Width</b>	0.9 in (22.5 mm)
<b>Product Weight</b>	0.441 lb(US) (0.200 kg)

## Environment

<b>Standards</b>	IEC 60947-5-1 IEC 61508-1 functional safety standard IEC 61508-2 functional safety standard IEC 61508-3 functional safety standard IEC 61508-4 functional safety standard IEC 61508-5 functional safety standard IEC 61508-6 functional safety standard IEC 61508-7 functional safety standard ISO 13849-1 functional safety standard IEC 62061 functional safety standard
<b>Product Certifications</b>	TÜV cULus
<b>IP degree of protection</b>	IP20 terminals)IEC 60529 IP40 housing)IEC 60529 IP54 mounting area)IEC 60529
<b>Relative Humidity</b>	5...95 % non-condensing

## Ordering and shipping details

<b>Category</b>	US1SAF222477
<b>Discount Schedule</b>	SAF2
<b>GTIN</b>	3606489601560
<b>Returnability</b>	No
<b>Country of origin</b>	ID

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	2.68 in (6.8 cm)
<b>Package 1 Width</b>	5.51 in (14.0 cm)
<b>Package 1 Length</b>	6.10 in (15.5 cm)
<b>Package weight(Lbs)</b>	9.2 oz (261.0 g)
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	16
<b>Package 2 Height</b>	11.81 in (30 cm)
<b>Package 2 Width</b>	11.81 in (30 cm)
<b>Package 2 Length</b>	15.75 in (40 cm)
<b>Package 2 Weight</b>	10.767 lb(US) (4.884 kg)



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	54
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

### Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	152cf799-1df7-4892-81b4-4c890187f1d1
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
PVC free	Yes


### Use Again

Repack and remanufacture	
Circularity Profile	<a href="#">End of Life Information</a>
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

Front and Side Views

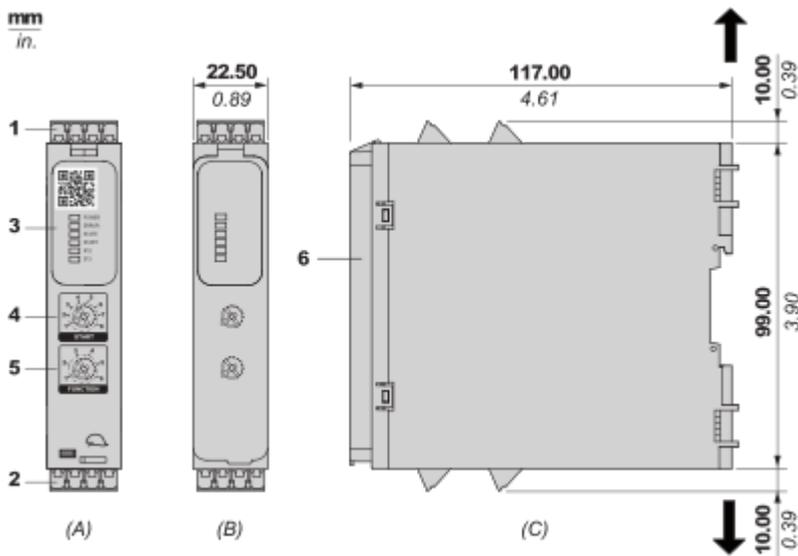


- (A) : Product drawing
- (B) : Spring Terminal
- (C) : Side view
- (1) : Removable terminal blocks, top
- (2) : Removable terminal blocks, bottom
- (3) : LED indicators
- (4) : Start function selector
- (5) : Function selector
- (6) : Sealable transparent cover

mm in.	12.0 0.47					
	mm <sup>2</sup>	0,2...2,5	0,25...2,5	0,2... 1,5	0,25...1	0,5... 1,5
	AWG	24...12	24...12	24...16	24...18	20...16

Mounting and Clearance

Mounting to DIN rail


---

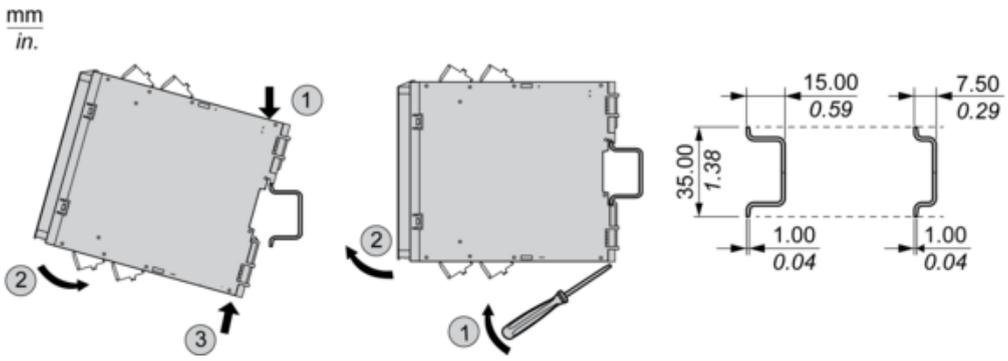

Screw-mounting

---


mm  
in.

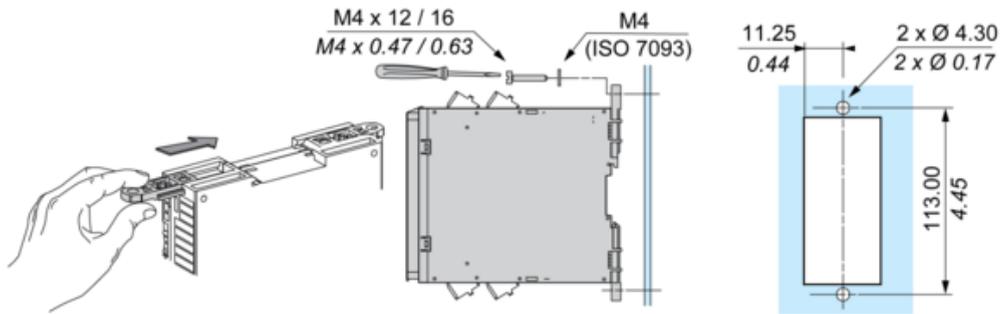

Connections and Schema

Wiring Drawing

---

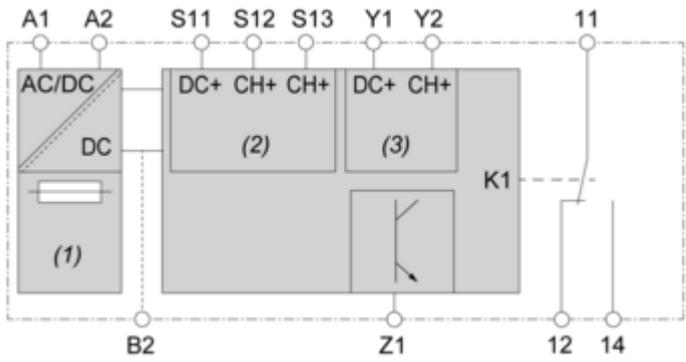

- (1) : A1-A2 (Power supply)
- (2) : S11-S12-S13 (Single-channel safety input)
- (3) : Y1-Y2 (Start)
- 11-12-14 : Output
- B2 : Common ground terminal
- Z1 : Pulsed output for diagnostics, not safety-related

Image of product / Alternate images

Alternative

---



