

# Product data sheet

Specifications



Editable voice alarms, Harmony XVS, white, mounting 96mm DIN rail, NPN, 12...24V DC

XVSV9BWN

## Main

Range of product	Harmony XVS
Product or component type	Editable electronic alarm
Beacon or indicator bank unit type	Sound unit
Device short name	XVSV

## Complementary

Colour	White
Input type	Bit: 6 channel input Binary: 63 channel input
Assembly style	Ready assembled
Material	PC (polycarbonate): body PC (polycarbonate): back cover TPE (thermoplastic elastomer): front panel NBR (nitrile butadiene rubber)
Marking	CE
Overvoltage category	Class II conforming to IEC 61140
Mounting support	96 mm DIN rail
[Us] rated supply voltage	12...24 V DC
[Ue] rated operational voltage	10...30 V DC
[Ui] rated insulation voltage	250 V
Inrush current	30 A
Associated fuse rating	1 A
[Uiimp] rated impulse withstand voltage	2.5 kV conforming to IEC 60947-1
Power consumption in W	3.8 W
Current consumption	160 mA at 24 V DC
Clamping connection capacity	<= 1 x 1.5 mm <sup>2</sup>
Device application	Packaging Printing Subway
Mounting diameter	105 mm
Width	105 mm
Height	105 mm
Depth	50.1 mm
Product weight	0.268 kg

## Environment

Discrete output type	NPN
Signalling type	Adjustable vocal sound
Standards	IEC 60947-5-1
Protective treatment	TC
Ambient air temperature for storage	-20...60 °C
Ambient air temperature for operation	-10...55 °C
Pollution degree	2
Relative humidity	35...85 % without condensation
Vibration resistance	7 gn
IP degree of protection	Panel mounted: IP65 conforming to IEC 60529 Wall mounted: IP20
Noise level	0...97 dB (stop or suppress) at 1 m

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.5 cm
Package 1 Width	5 cm
Package 1 Length	10.5 cm
Package 1 Weight	268 g



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	Fe0ee3ab-dd49-4abe-bd8e-c49754e2c442
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a>


## Use Again

### Repack and remanufacture

Take-back	No
-----------	----


## Dimensions Drawings

## Dimensions

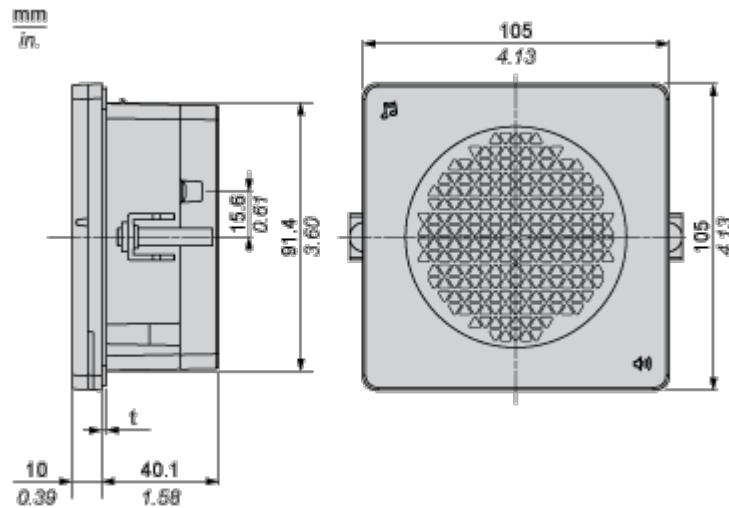


(t) : Waterproof rubber (1.6 mm / 0.06 in.)

## Mounting and Clearance

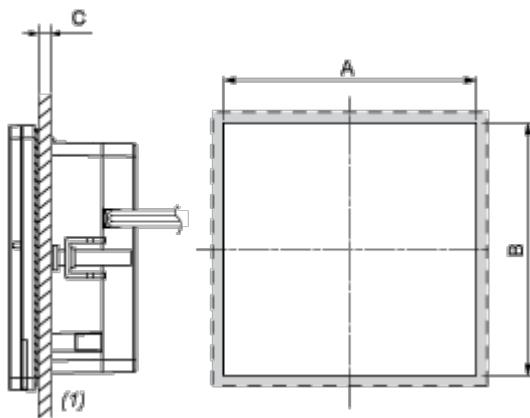Panel Cut Dimensions


(1) Installation panel

A	B	C
92 +0.6/0 mm (3.62 +0.0236/0 in.)	92 +0.6/0 mm (3.62 +0.0236/0 in.)	1...4 mm (0.04...0.15 in.)

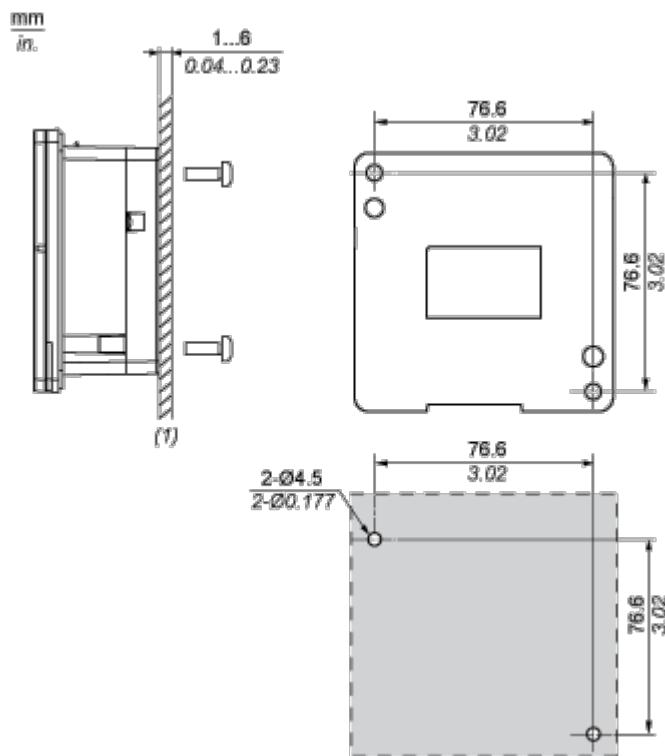Wall Mount Dimensions

(1) Installation panel


## Connections and Schema

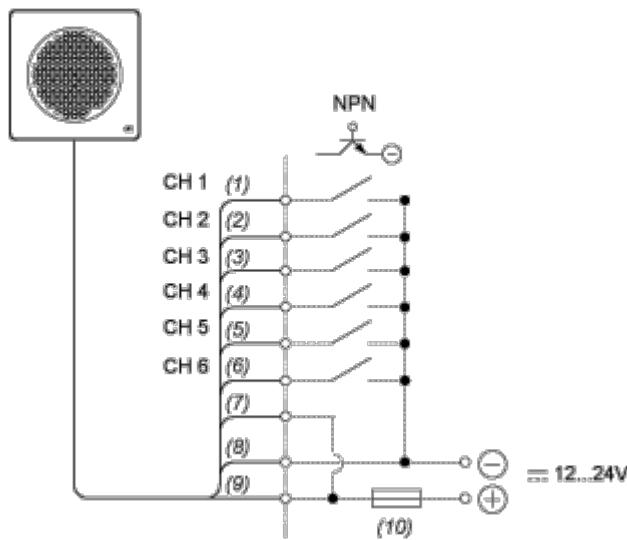Wiring Diagram

- (1) Green
- (2) Yellow
- (3) Brown
- (4) Blue
- (5) Purple
- (6) Gray
- (7) White
- (8) Black
- (9) Red
- (10) Fuse (Rated current:1 A)

## Technical Illustration

## Dimensions

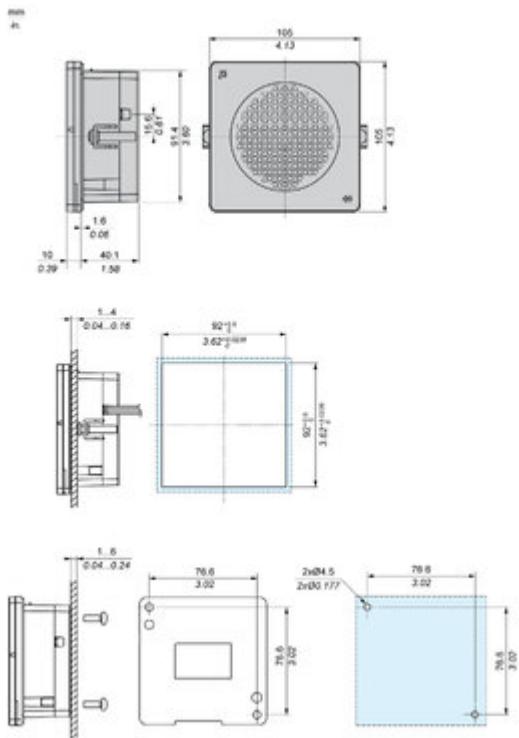

## Technical Illustration

## Wiring diagram

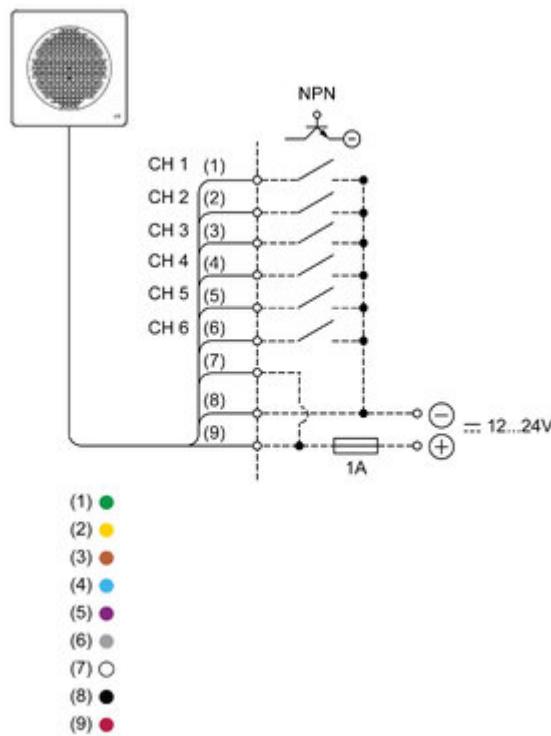


Image of product / Alternate images

Alternative

---



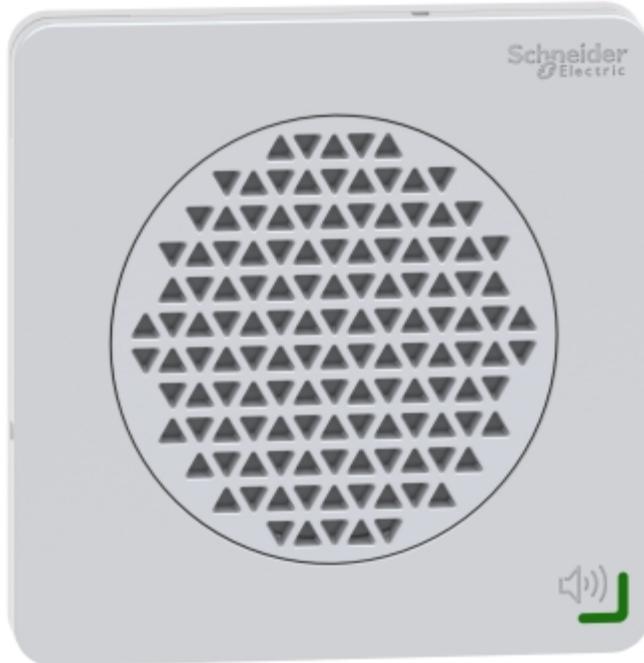


Image of product in real life situation

