

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
1.732 [44.0] WIDE; 1.260 [32.0] PITCH

2. REEL:

13.0 [330.2] DIA. 200 PIECES OF
PART NO. 1064 PER REEL.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME

20mm SM COIN CELL HOLDER ON TAPE

MATERIAL



AS NOTED

FINISH	AS NOTED		DRN BY	DATE
TOLERANCES	INCH	[MM]	BOONE	5.8.00
DECIMAL	± .015	[± 0.38]	APP'D	LN
ANGULAR	± 1°		SCALE	X
UNLESS OTHERWISE SPECIFIED		CODE	DWG NO.	
REV. C			1064TR	

DATE

DESCRIPTION

REV.

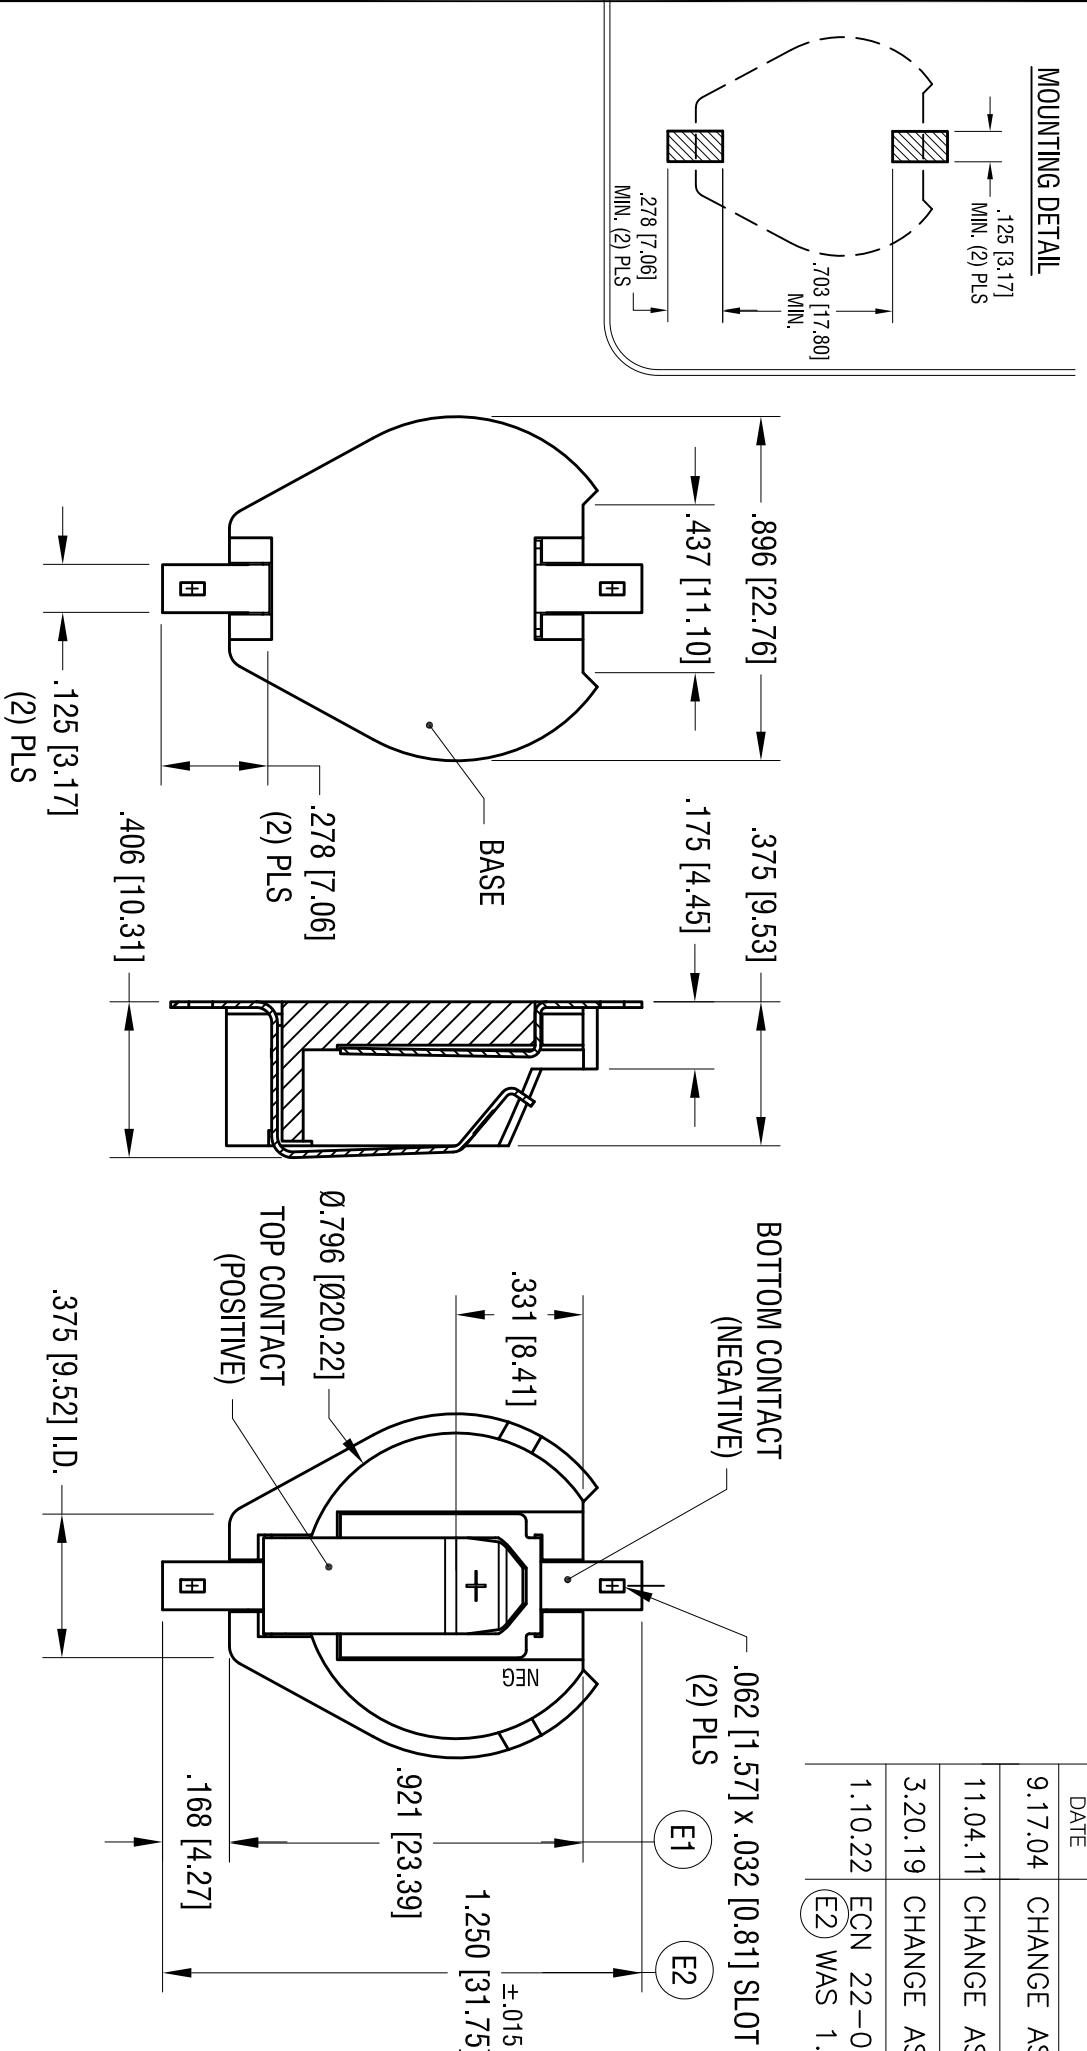

KEYSTONE ELECTRONICS CORP.

www.KeystoneCo.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME: DUAL 20mm BATTERY HOLDER, SMT
MATERIAL:

ACTUAL SIZE
AS NOTED

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

FINISH	AS NOTED	DRW BY APP'D	BOONE LN	DATE SCALE
TOLERANCES DECIMAL ANGULAR UNLESS OTHERWISE SPECIFIED	$\pm .010$ [± 0.25]	C	DWG NO. 8.09.95	2X 1064

MOUNTING DETAIL

DATE

DESCRIPTION

REV.

9.17.04	CHANGE AS PER ECN 04-107	B
11.04.11	CHANGE AS PER ECN 11-149	C
3.20.19	CHANGE AS PER ECN19-038	D
1.10.22	ECN 22-010, (E1) WAS .931 (E2) WAS 1.250±.010	E