

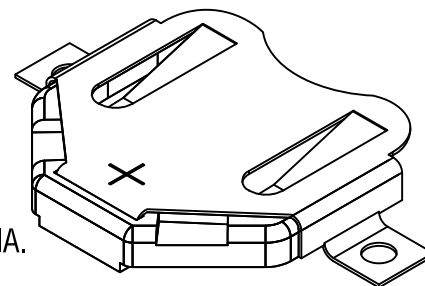




THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

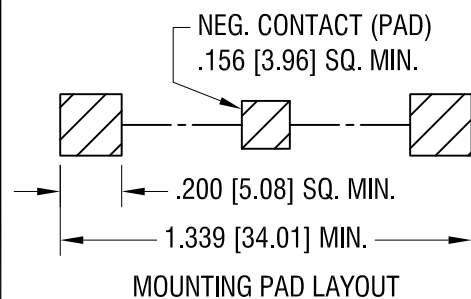

$\pm .005 [\pm 0.15]$
 $\varnothing .093 [\varnothing 2.36]$ DIA.
(2) PLS

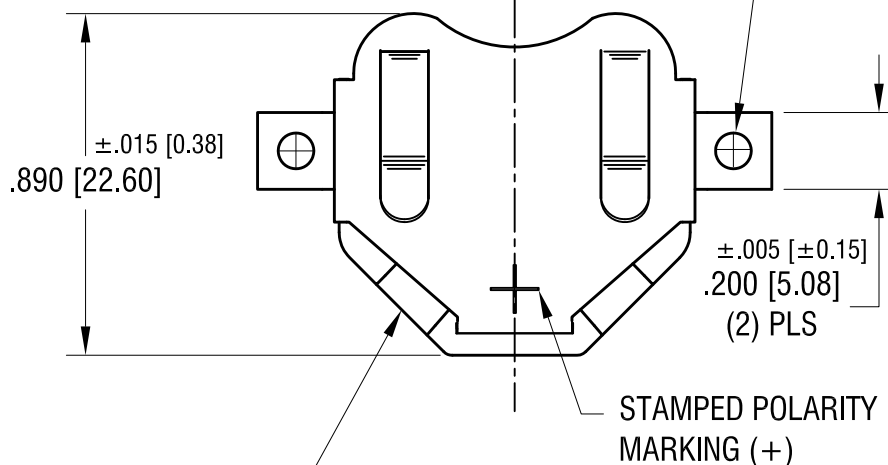

BATTERY RELIEVE
(2) PLS

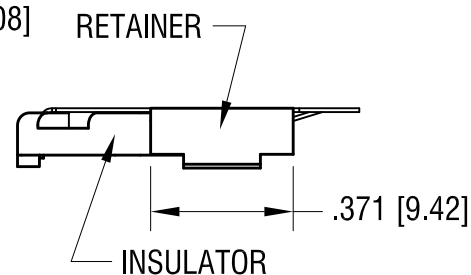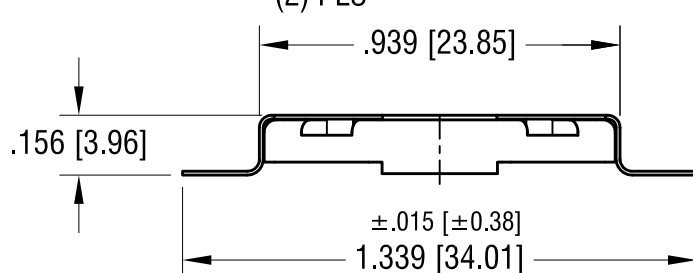

NOTE:

1. CLIP MAT'L: .010 [0.25] TH'K PHOSPHOR BRONZE.
INSULATOR MAT'L: NYLON-46 HIGH TEMP, UL 94V-0.
COLOR: NATURAL.
2. CLIP FINISH: MATTE TIN PLATE

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK NY 11040 • Tel (516)328-7500

PART NAME

SM COIN CELL CLIP ASSEMBLY FOR TWO 2016

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

NT

DATE

9.09.09

APP'D

RH

SCALE

2X

TOLERANCES

INCH [MM]

DECIMAL

$\pm .010 [\pm 0.25]$

ANGULAR

$\pm 1^\circ$

UNLESS OTHERWISE SPECIFIED

CODE

DWG NO.

C

3070

2.25.25

UPDATED INSULATOR MAT'L.

A

DATE

DESCRIPTION

REV.