

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
2.21 [56.0] WIDE; 1.10 [28.00] PITCH

2. REEL:

13.0 [330.2] DIA. 400 PIECES OF
PART NO. 3070 PER REEL.

SPLITTED C/M DWG.
UPDATED PACKAGING DETAILS.

2.25.25

A



KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • NEW HYDE PARK NY 11040 • Tel (516)328-7500			
PART NAME			
SM RETAINER ON TAPE			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		NT	6.15.10
		APP'D	SCALE
		RH	X
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	±.015 [±0.38]	C	3070TR
ANGULAR	± 1°		
UNLESS OTHERWISE SPECIFIED			

DATE


DESCRIPTION

REV.


THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

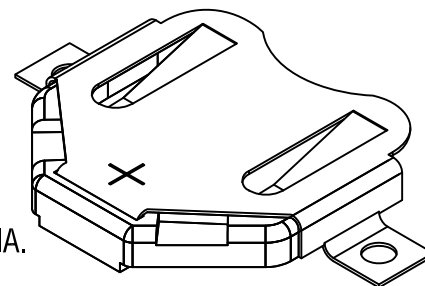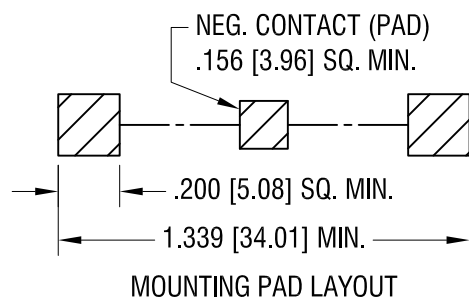

$\pm .005 [\pm 0.15]$
 $\varnothing .093 [\varnothing 2.36]$ DIA.
(2) PLS

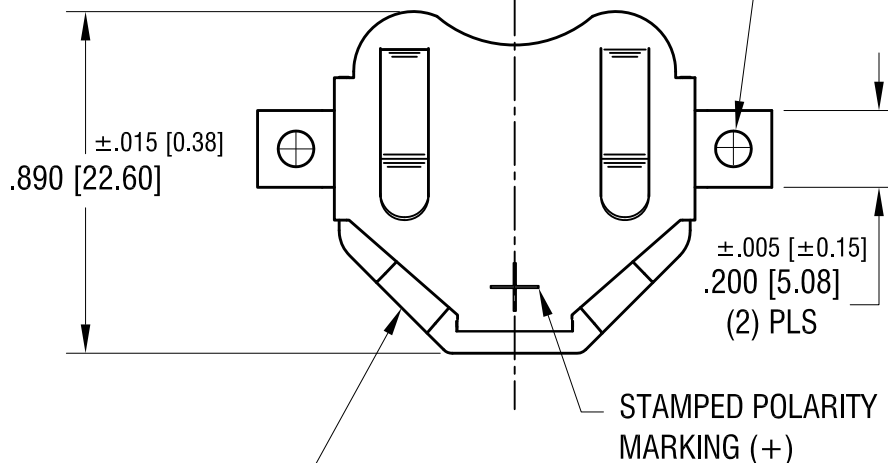

BATTERY RELIEVE
(2) PLS

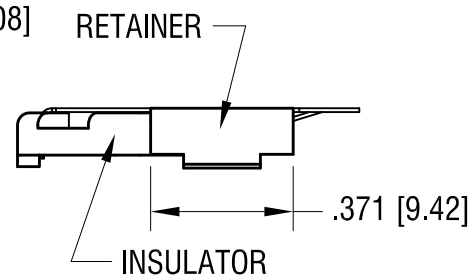

NOTE:

1. CLIP MAT'L: .010 [0.25] TH'K PHOSPHOR BRONZE.
INSULATOR MAT'L: NYLON-46 HIGH TEMP, UL 94V-0.
COLOR: NATURAL.
2. CLIP FINISH: MATTE TIN PLATE

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK NY 11040 • Tel (516)328-7500

PART NAME

SM COIN CELL CLIP ASSEMBLY FOR TWO 2016

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

NT

DATE

9.09.09

APP'D

RH

SCALE

2X

TOLERANCES

INCH [MM]

DECIMAL $\pm .010 [\pm 0.25]$

ANGULAR $\pm 1^\circ$

UNLESS OTHERWISE SPECIFIED

CODE

DWG NO.

C

3070

2.25.25

UPDATED INSULATOR MAT'L.

A

REV.

DATE

DESCRIPTION