


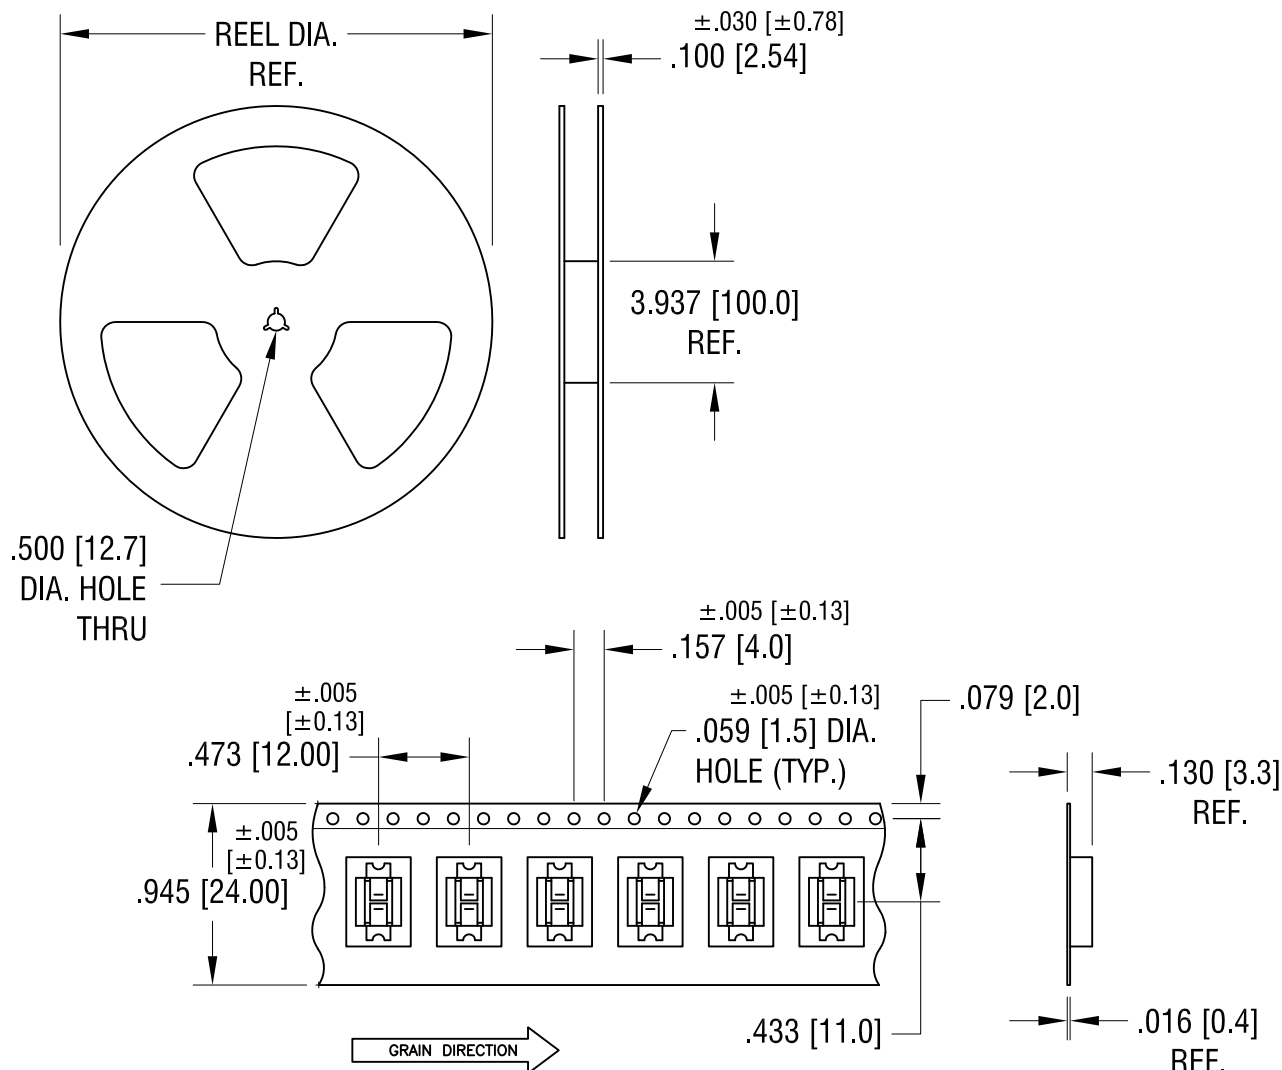

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:
MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
2. REEL:
13.0 [330.2] DIA. 1500 PIECES OF
PART NO. 3563 PER REEL
3. KAPTON TAPE TO BE APPLIED TO TOP
SURFACE OF FUSE CLIP FOR VACUUM PICK AND PLACE

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME

SM MINI-AUTO BLADE CLIP ON TAPE

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

NT

DATE

2.10.16

APP'D

LN

SCALE

X

TOLERANCES

INCH

[MM]

DECIMAL

± .015 [± 0.38]

ANGULAR

± 1°

UNLESS OTHERWISE SPECIFIED

CODE

DWG NO.

C

3563KTR


DATE

DESCRIPTION




REV.

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

MOUNTING DETAIL FOR TWO CLIPS

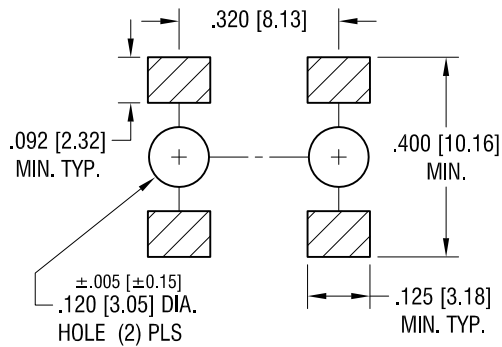

ACTUAL SIZE

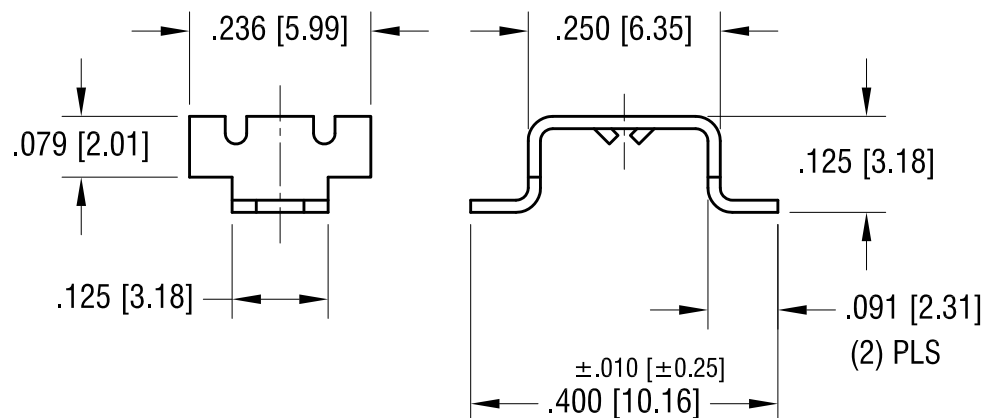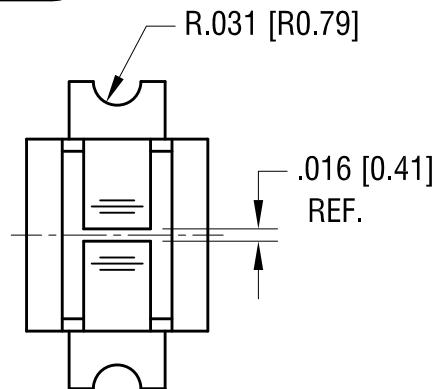

FILE NUMBER: E354010

12.15.15	CHANGE AS PER ECN 09-168	C
11.17.09	CHANGE AS PER ECN 09-168	B
1.14.03	CHANGE AS PER ECN 03-002	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • NEW HYDE PARK NY 11040 • Tel (516)328-7500			
PART NAME			
SM MINI-AUTO BLADE FUSE CLIP			
MATERIAL			
.016 [0.40] TH'K BRASS			
FINISH		DRN BY	BOONE
MATTE TIN PLATE		DATE	3.18.08
		APP'D	LN
		SCALE	4X
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	$\pm .005$ [± 0.13]	C	
ANGULAR	$\pm 1^\circ$		
UNLESS OTHERWISE SPECIFIED			
3563			