

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
1.260 [32.0] WIDE; .788 [20.0] PITCH





2. REEL:

13.0 [330.2] DIA. 250 PIECES OF
PART NO. 557 PER REEL.

12.08.25	WIDTH WAS 1.260 [32.00] CHANGE AS PER PCN 25-041.	D
5.1.11	CHANGE AS PER ECN 11-061	C
4.29.11	CHANGE AS PER ECN 11-058	B
4.18.11	CHANGE AS PER ECN 11-054	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
SM BATTERY CLIP ON TAPE			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		NT	8.11.09
		APP'D	SCALE
		RH	X
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	± .015 [± .038]	C	557TR
ANGULAR	± 1°		
UNLESS OTHERWISE SPECIFIED			

ACTUAL SIZE

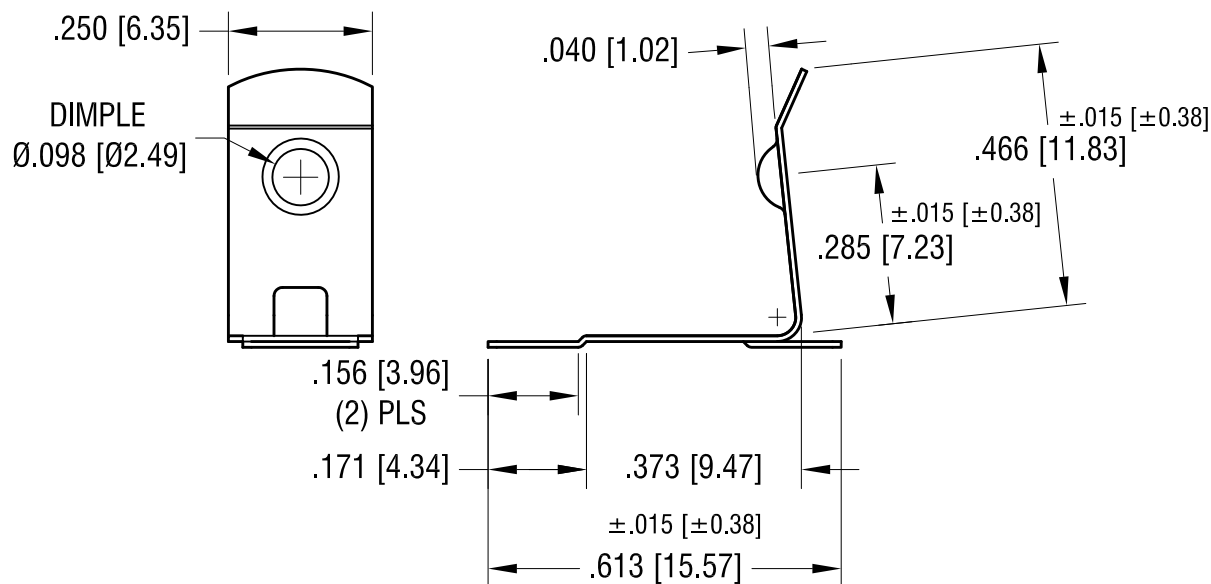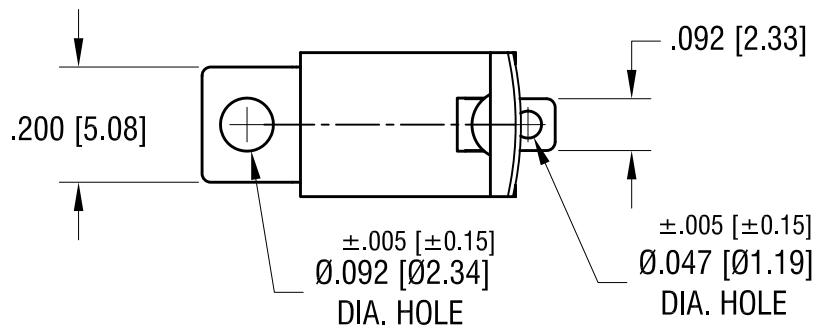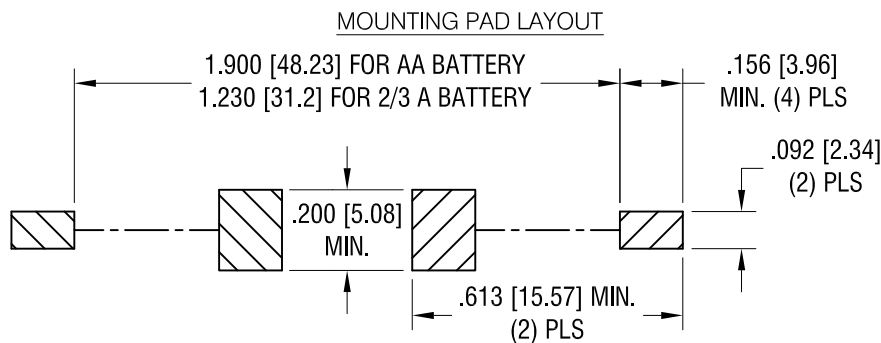

1. HEAT TREAT TO SPRING TEMPER.

<h1>KEYSTONE ELECTRONICS CORP.</h1> <p>www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500</p>			
PART NAME <h2>'AA' SMT BATTERY CLIP</h2>			
MATERIAL <h2>.010 [0.25] TH'K ANNEALED SPRING STEEL</h2>			
FINISH <h2>MATTE TIN PLATE</h2>		DRN BY <h2>NT</h2>	DATE <h2>8.27.09</h2>
		APP'D <h2>MR</h2>	SCALE <h2>3X</h2>
TOLERANCES INCH [MM] DECIMAL $\pm .010$ [± 0.25] ANGULAR $\pm 1^\circ$ UNLESS OTHERWISE SPECIFIED		CODE <h2>C</h2>	DWG NO. <h1>557</h1>