

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
 ANSI/EIA-481 STANDARD
 1.260 [32.0] WIDE; .788 [20.0] PITCH

2. REEL:

13.0 [330.2] DIA. 250 PIECES OF
 PART NO. 57 PER REEL.

12.08.25 | WIDTH WAS 1.260 [32.00]
 CHANGE AS PER PCN 25-042. | D

5.1.11 | CHANGE AS PER ECN 11-061 | C

4.29.11 | CHANGE AS PER ECN 11-058 | B


4.18.11 | CHANGE AS PER ECN 11-054 | A

DATE | DESCRIPTION | REV.

THIS DOCUMENT IS THE PROPERTY OF
 KEYSTONE ELECTRONICS CORP. AND
 SHALL NOT BE REPRODUCED, DISTRIBUTED
 OR USED AS A BASIS FOR MANUFACTURE
 WITHOUT PRIOR WRITTEN PERMISSION
 FROM KEYSTONE ELECTRONICS CORP.



KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
SM BATTERY CLIP ON TAPE			
MATERIAL	AS NOTED		
FINISH	AS NOTED		DRN BY NT DATE 10.13.09
			APP'D RH SCALE X
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	± .015 [± .038]	C	57TR
ANGULAR	± 1°		
UNLESS OTHERWISE SPECIFIED			

MOUNTING PAD LAYOUT

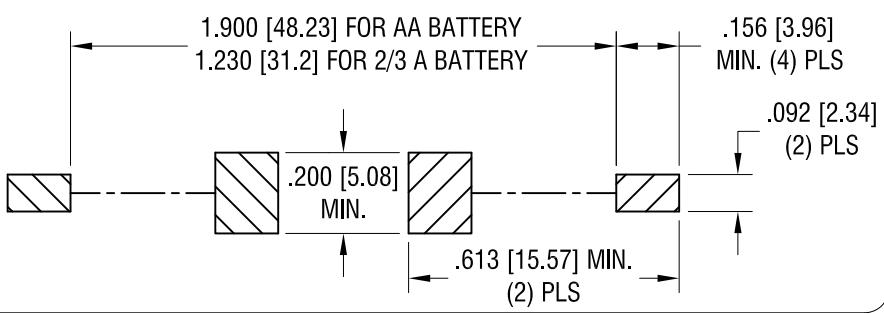

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE

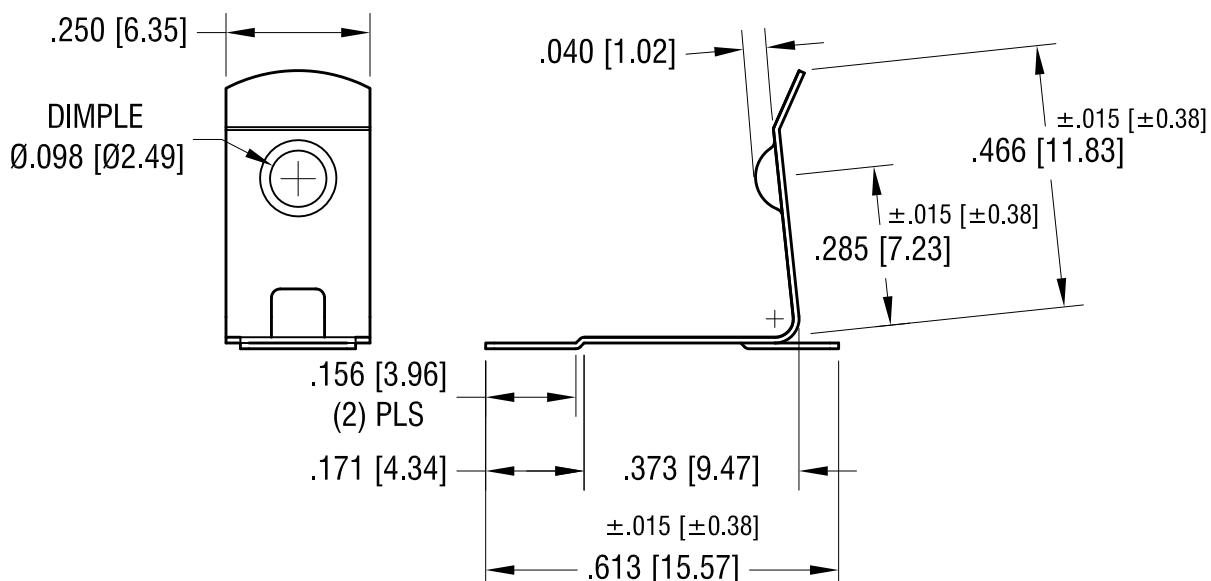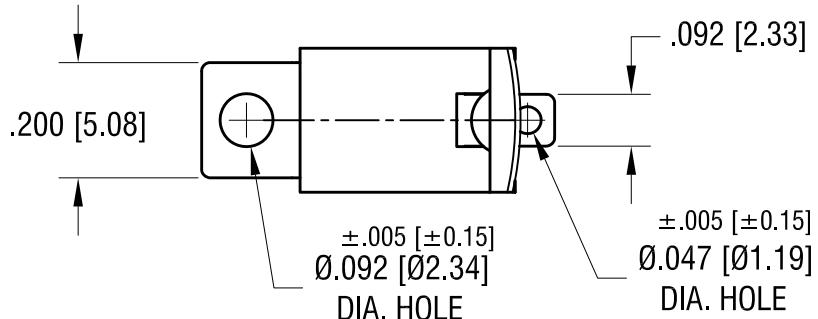

NOTE:

1. HEAT TREAT TO SPRING TEMPER.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

'AA' SMT BATTERY CLIP

MATERIAL

.010 [0.25] TH'K ANNEALED SPRING STEEL

FINISH

TIN-NICKEL PLATE

DRN BY

NT

DATE

8.27.09

APP'D

SCALE

3X

7.09.24	NO CHANGES TO PART.	D	TOLERANCES INCH [MM]		CODE	DWG NO.
4.06.17	CHANGE AS PER ECR17-019	C	DECIMAL $\pm .010 [\pm 0.25]$			
1.25.11	CHANGE AS PER ECN 11-008	B	ANGULAR $\pm 1^\circ$			
8.10.09	CHANGE AS PER ECN 09-111	A	UNLESS OTHERWISE SPECIFIED		C	57
DATE	DESCRIPTION	REV.				