

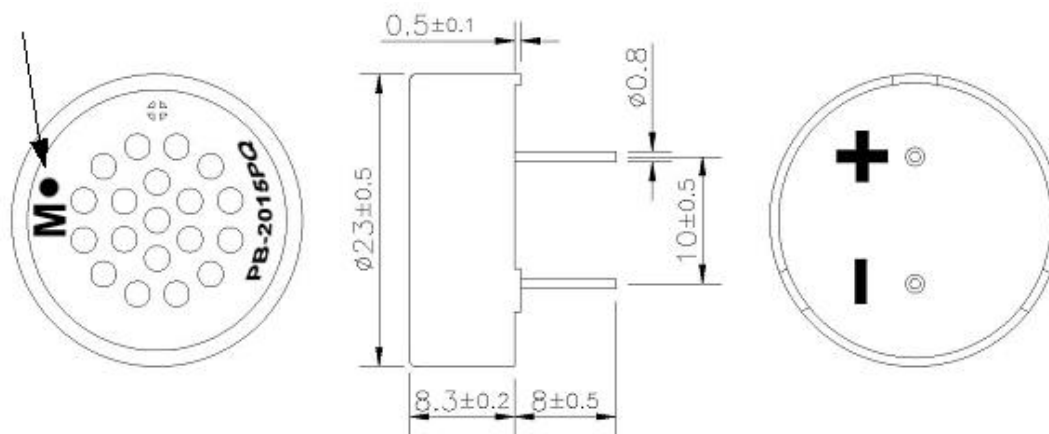
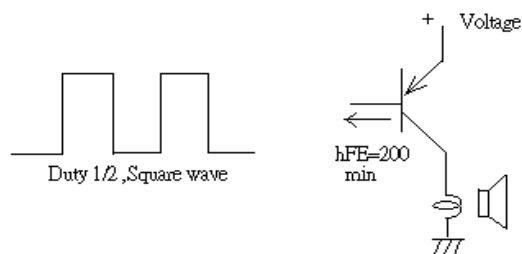
Sales Outline Drawing
Revision E

**May not be suitable for all medical and aerospace applications.
Specifications: Contact Mallory Sonalert to discuss your application.**

NO CIRCUITRY

Oscillation Frequency (Hz)	1500 $\pm$ 200
Operating Voltage (Vp-p)	2.0 ~ 5.0
Rated Voltage (Vp-p)	3.0
Input Watt (W/max)	0.15
Sound Pressure Level (dB/min)	80 at 10cm at Rated Voltage
Coil Resistance (Ω)	8.0 $\pm$ 2
Operating Temperature ($^{\circ}$ C)	-10 ~ +40
Storage Temperature ($^{\circ}$ C)	-20 ~ +50
Housing	PPO plastic resin(Color: Black)
Lead	Tin Plated Brass
Weight (Grams)	3.2
Condition by wave soldering ($^{\circ}$ C)	245 $\pm$ 5 / 3 $\pm$ 0.5 sec
Condition by hand soldering ($^{\circ}$ C)	350 $\pm$ 20 / within 5 sec
Options	White Paint Dot at Arrow Indicates PB-2015PQ has been tested to PB-2015PAQ Specification

Dimensions: (units: mm)

RoHS Compliant

Recommended Driving Circuit:


The base current, Ib, should be high enough so that it saturates the collector current of the transistor with the CB load.