


IEEE 1588 Timing Synchronization FMC Daughter Card Quickstart Card

Kit Contents—MSCC-1588-DB

Quantity	Description
1	FMC daughter card containing the ZL30363 IEEE 1588 phase-locked loop (PLL) and VSC8575 Ethernet PHY
1	Quickstart card

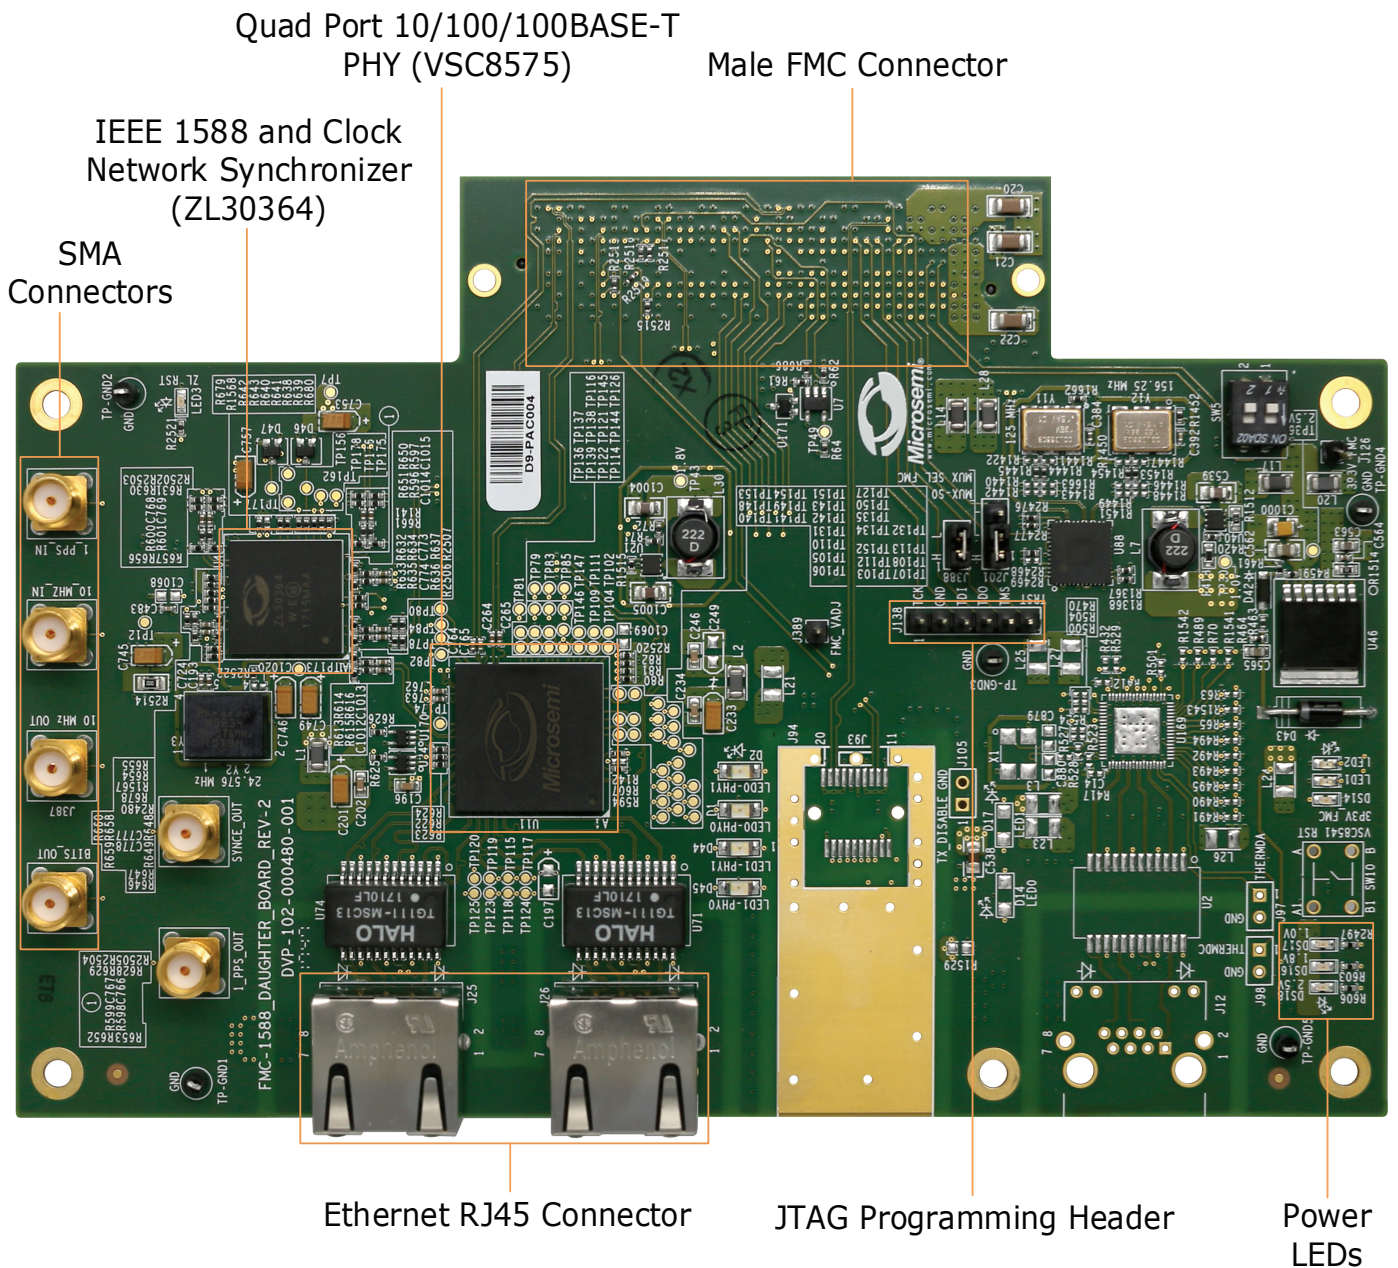

Overview

Microsemi IEEE™ 1588 Timing Synchronization Module (TSM) solution comprises of an IEEE 1588 FMC daughter card, software, and firmware. The solution combines best-in-class capabilities from Microsemi's broad product portfolios by leveraging the company's SmartFusion®2 system-on-chip (SoC) field programmable gate array (FPGA), ZL30363 IEEE 1588 phase-locked loop (PLL), and VSC8575 Ethernet PHY devices.

Microsemi's IEEE 1588 FMC daughter card is the hardware evaluation platform for evaluating and testing the PTP engine and time-synchronization algorithm (firmware). The daughter card works with SmartFusion2 SoC FPGA Advanced Development Kit, which features the SmartFusion2 system-on-chip (SoC) field programmable gate array (FPGA) device. This kit needs to be purchased separately. This chipset runs the highly optimized IEEE 1588 protocol-compliant PTP engine and time-synchronization algorithm combined with accurate timestamping in the PHY. Customers interface to the TSM through a command line interface (CLI) through 1000BASE-X or UART communications. The solution provides nanosecond-level time stamping accuracy across network with up to 4 client/slave nodes.

Applications

[IEEE 1588 technology](#) is used across many applications, including the following:

- Mobile infrastructure
- Enterprise infrastructure
- Industrial Ethernet networking
- Defense
- Smart energy

Key Features

- Supports BC, OC-client/slave
- Up to 4 clients
- High-accuracy time stamping
- Frequency and phase synchronization
- Reference switching
- Precision frequency and phase control
- Multiple profiles, including IEEE 1588-2008 Annex J.3 End-to-End
- IEEE 1588-2008 Annex J.4 Peer-to-Peer
- IEEE C37.238-2011 Power Profile
- ITU-T G.8275.1 Telecom Profile for Phase
- ITU-T G.8265.1 Telecom Profile for Frequency

Hardware Setup

To evaluate Microsemi's IEEE 1588 Timing Synchronization Module, a two-board hardware setup is utilized. The daughter card is plugged into the SmartFusion2 SoC FPGA Advanced Development Kit (using the FMC HPC connector on each board), which features the SmartFusion2 system-on-chip (SoC) field programmable gate array (FPGA) device. Both development boards are required and must be purchased separately.

Programming

The Smartfusion2 Advanced Development Kit must be programmed before use. An .stp file is available as part of the IEEE 1588 Timing Synchronization FMC Daughter Card download support package.

See www.microsemi.com/products/fpga-soc/design-resources/dev-kits/smartfusion2/ieee-1588-module#documentation for more information about programming procedures.

Jumper Settings

The following table lists the required jumper settings on the IEEE 1588 Timing Synchronization FMC Daughter Card.

Jumper	Setting	Comment
J201	On 1-2	3-pin header
J388	On	
DIP1	Off	
DIP2	Off	
J105		Not fitted
J97		Not fitted
J98		Not fitted

See <https://www.microsemi.com/products/fpga-soc/design-resources/dev-kits/smartfusion2/ieee-1588-module#documentation> for full details about jumper settings.

Running the Demo

The TSM can be set up as an OC or BC. There are example configuration files in the download support package of each configuration. Once you setup you device, you need an PTP master or slave to demo the TSM working.

If you do not have a third-party master or slave, you can use a second TSM as the master/slave.

Software and Licensing

Libero® SoC Design Suite offers high productivity with its comprehensive, easy-to-learn, easy-to-adopt development tools for designing with Microsemi's low power Flash FPGAs and SoC. The suite integrates industry standard Synopsys Synplify Pro® synthesis and Mentor Graphics ModelSim® simulation with best-in-class constraints management and debug capabilities.

Download the latest Libero SoC release

<http://www.microsemi.com/products/fpga-soc/design-resources/design-software/libero-soc#downloads>

A Software ID letter enclosed with the SmartFusion2 Advanced Development Kit contains Software ID and instructions on how to generate a Libero Gold license.

For further details on how to generate a gold license, see

www.microsemi.com/products/fpga-soc/design-resources/dev-kits/smartfusion2/smartfusion2-advanced-development-kit#licensing

Documentation Resources

For more information about the IEEE 1588 Timing Synchronization FMC Daughter Card, including user's guides and datasheets, see the documentation at <https://www.microsemi.com/products/fpga-soc/design-resources/dev-kits/smartfusion2/ieee-1588-module#documentation>

Support

Technical support is available online at www.microsemi.com/soc/support and by email at soc_tech@microsemi.com

Microsemi sales offices, including representatives and distributors, are located worldwide.

To find your local representative, go to <http://www.microsemi.com/salescontacts>



Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Fax: +1 (949) 215-4996
Email: sales.support@microsemi.com
www.microsemi.com

©2018 Microsemi Corporation. All rights reserved.
Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California and has approximately 4,800 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

MSCC-0101-QS-01001-1.00-0218