


PANEL CUTOUT
MAX. PANEL THICKNESS 12mm




SWITCH FUNCTION	
POS. 1	POS. 2
1-2 ON 3-4 OFF	1-2 OFF 3-4 ON



▲ SPDT ON-OFF / OFF-ON
CONTACT CONFIGURATION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NOS. FOR REF. ONLY
4. RATING: 2A @ 48VDC
5. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
6. INSULATION RESISTANCE: 1,000M Ω @ 500VDC
7. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
8. ELECTRICAL LIFE: 50,000 CYCLES
9. OPERATING TEMPERATURE: -20°C TO 70°C
10. INGRESS PROTECTION: IP65
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT
- ▲ 13. HARDWARE INCLUDED (NOT SHOWN) HEX NUT AND O-RING
- ▲ 14. ILLUMINATION VOLTAGE: 6V

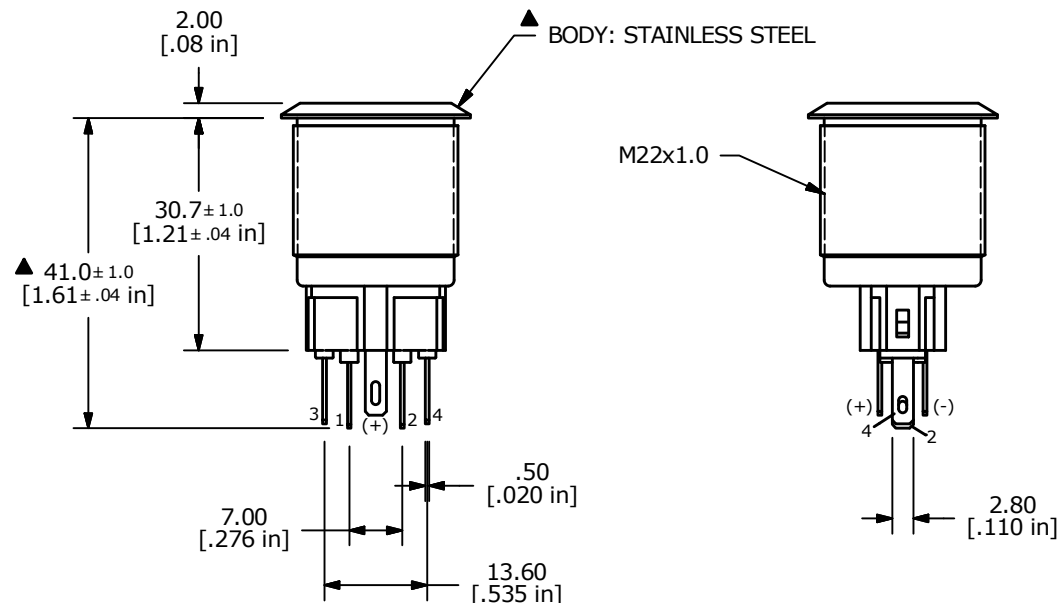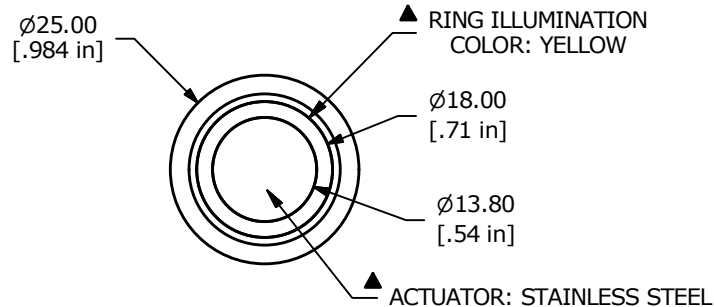

TITLE PV7F2T0SS-353

A	22280	RELEASE FOR PRODUCTION	4/25/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 1:1	DATE 4/25/2016	DR MW	DWG 52-PV7F2T0SS353	REV A
--------------	-------------------	----------	------------------------	----------