



|           |           |
|-----------|-----------|
| O.P. (MM) | P.T. (MM) |
| 10.8±0.8  | 2.0 MAX.  |

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL




CIRCUIT: SPDT

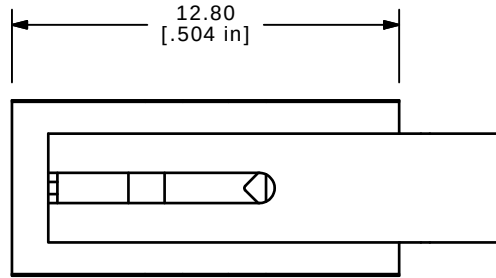

ISOMETRIC

SCALE: 3:1

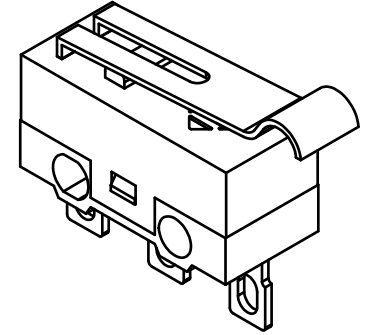

The technical drawing shows a mechanical component with the following dimensions:

- Top View Dimensions:**
  - Total width: 15.00 [.591 in]
  - Distance from left edge to center of first hole: 5.20 [.205 in]
  - Hole diameter: Ø2.00 x 2.00 SLOT [.086 x .078 in]
  - Distance between centers of holes: 2.00 [.079 in]
  - Distance from right edge to center of last hole: 6.50 [.256 in]
  - Overall length: 12.80 [.504 in]
  - Distance from left edge to center of first hole (bottom view): 1.83 [.072 in]
  - Distance between centers of holes (bottom view): 5.08 [.200 in]
  - Distance from right edge to center of last hole (bottom view): 2.20 [.087 in]
- Side View Dimensions:**
  - Height of main body: 1.50 [.059 in]
  - Height of mounting flange: 2.00 [.079 in]
  - Height of base: 6.50 [.256 in]
  - Mounting flange thickness: 2.00 [.079 in]
  - Base thickness: 1.20 [.047 in]
- Other Features:**
  - Labels: C, NO, NC
  - Surface finish: DHMS MIN. NUTE
  - TRAY.
  - PT (Part)
  - OP (Operator)

Technical drawing of a mechanical assembly with dimensions:

- Top horizontal dimension: 3.60 [.142 in]
- Top right vertical dimension: 5.70 [.224 in]
- Middle right vertical dimension: 3.50 [.14 in]
- Bottom right vertical dimension: .40 [.016 in]
- Bottom horizontal dimension: 5.80 [.228 in]

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4  
X.XX=± 0.25
- ▲ 3. RATING: .1A @ 5 VDC
4. OPERATING FORCE: 25± 10 GRAMS
- ▲ 5. OPERATING TEMP: -25°C TO 75°C 2.00
6. ELECTRICAL LIFE: 10,000 CYCLES MIN. [.079]
7. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
8. DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
9. ▲ DENOTES CRITICAL PARAMETER.
10. PACKAGED IN TRAYS, 120 PIECES PER TRAY.
11. 2002/95/EC (ROHS) COMPLIANT



|                                                                                                              |        |                        |         |     |                        |                |        |             |       |
|--------------------------------------------------------------------------------------------------------------|--------|------------------------|---------|-----|------------------------|----------------|--------|-------------|-------|
| A                                                                                                            | 19877  | RELEASE FOR PRODUCTION | 4/26/11 | BGL | TITLE SS075Q102F025S1A |                |        |             |       |
| REV                                                                                                          | PCR NO | DESCRIPTION            | DATE    | BY  |                        |                |        |             |       |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |        |                        |         |     | SCALE 4:1              | DATE 4/26/2011 | DR BGL | DWG Q971030 | REV A |