



SCHEMATIC
ON - (ON)
() = MOMENTARY
DPDT NON-ILLUMINATED




RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 10.0 [.39 in]

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, PURPLE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-4	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-5	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-6	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]

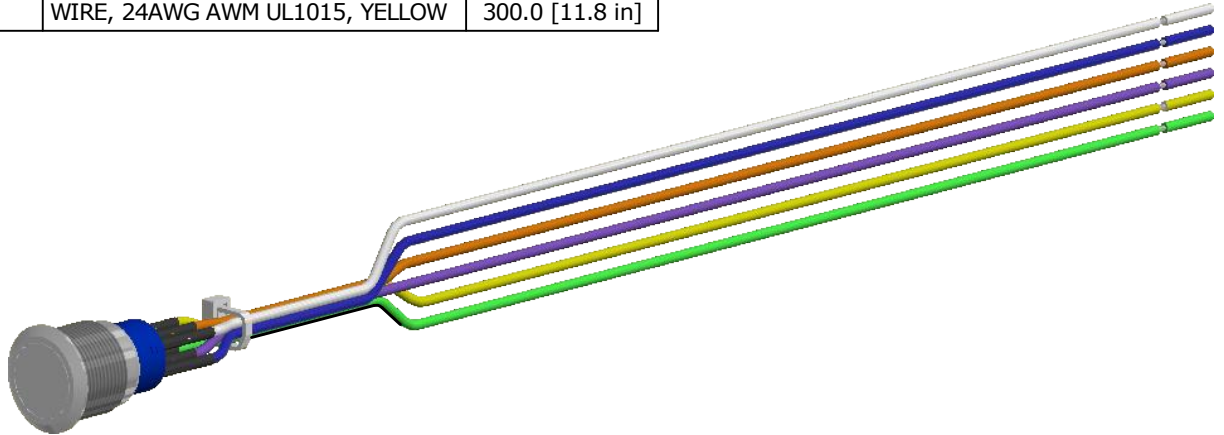

- NOTES:
- DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - CONTACT MATERIAL: GOLD
 - RATING: 3A 250 VAC cUL
 - OPERATING TEMP.: -20°C to 55°C
 - LAMP VOLTAGE: N/A
 - TRAVEL: 3.2mm
 - ACTUATION FORCE: 3.5 ±1.0 N
 - MOUNTING NUT TORQUE: 5-14 Nm
 - INGRESS PROTECTION: IP67, IK10
 - MECHANICAL LIFE: 1,000,000 CYCLES.
 - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - INSULATION RESISTANCE: 1,000 MΩ @ 500VDC MIN.
 - DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 - ▲ DENOTES CRITICAL PARAMETER.
 - ALL MATERIAL SHALL BE ROHS COMPLIANT
 - ▲ SUPPLIED HARDWARE: O-RING AND HEXNUT
 - ▲ USE P/N's DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

Ø22.00
[Ø.866 in]
Ø15.50
[Ø.610 in]

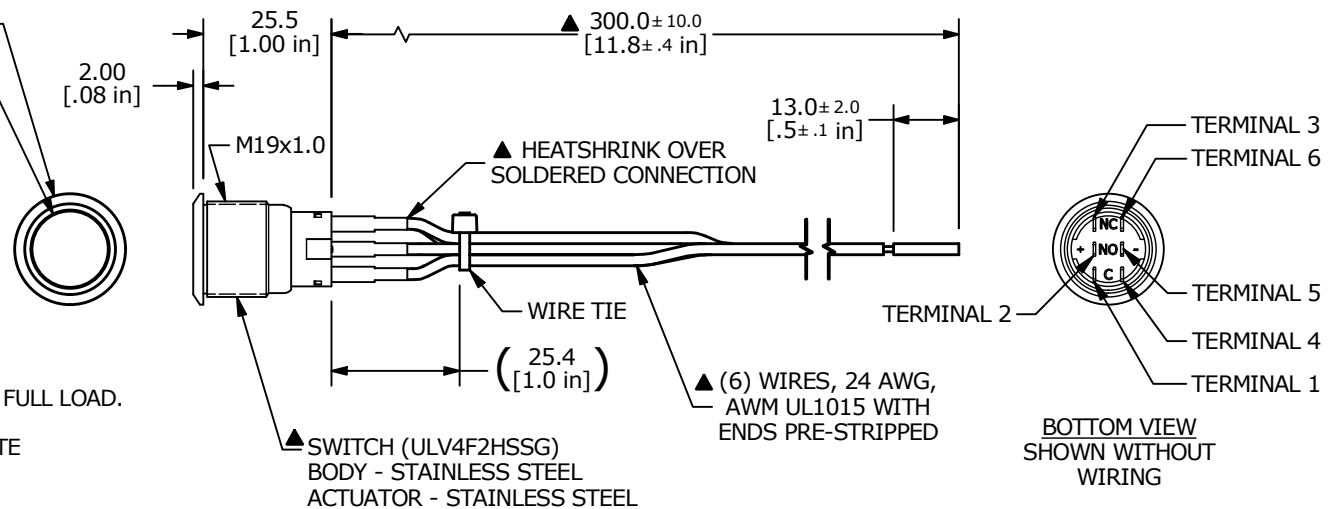

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-100363	UPDATE PANEL CUTOUT	12/10/21	JS	TITLE ULV4FWHSSG				000026164
					SCALE	DATE	DR	DWG	REV
					2:3	8/2/2019	MW	T940506	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED