

P/N:160-067-004R034 (BAG) INCLUDES:


2 - 4-40 UNC-2B MOUNTING SCREWS
(ZINC PLATED STEEL)
2 - TEFLON FLAT WASHERS

*NOTE: RECOMMEND APPLICATION OF THREAD
LOCKER TO MALE THREADS OF MOUNTING SCREW
DURING ASSEMBLY PROCESS TO ENSURE TORQUE
SPECIFICATION IS MAINTAINED DURING USE

*MAXIMUM PANEL THICKNESS

0.035"-0.038" when using 09/15 sized SF67 Series Sealing Flanges (non-adhesive)
0.027"-0.030" when using 25 sized SF67 Series Sealing Flanges (non-adhesive)

IP-67 SEAL
PURCHASED
SEPARATELY

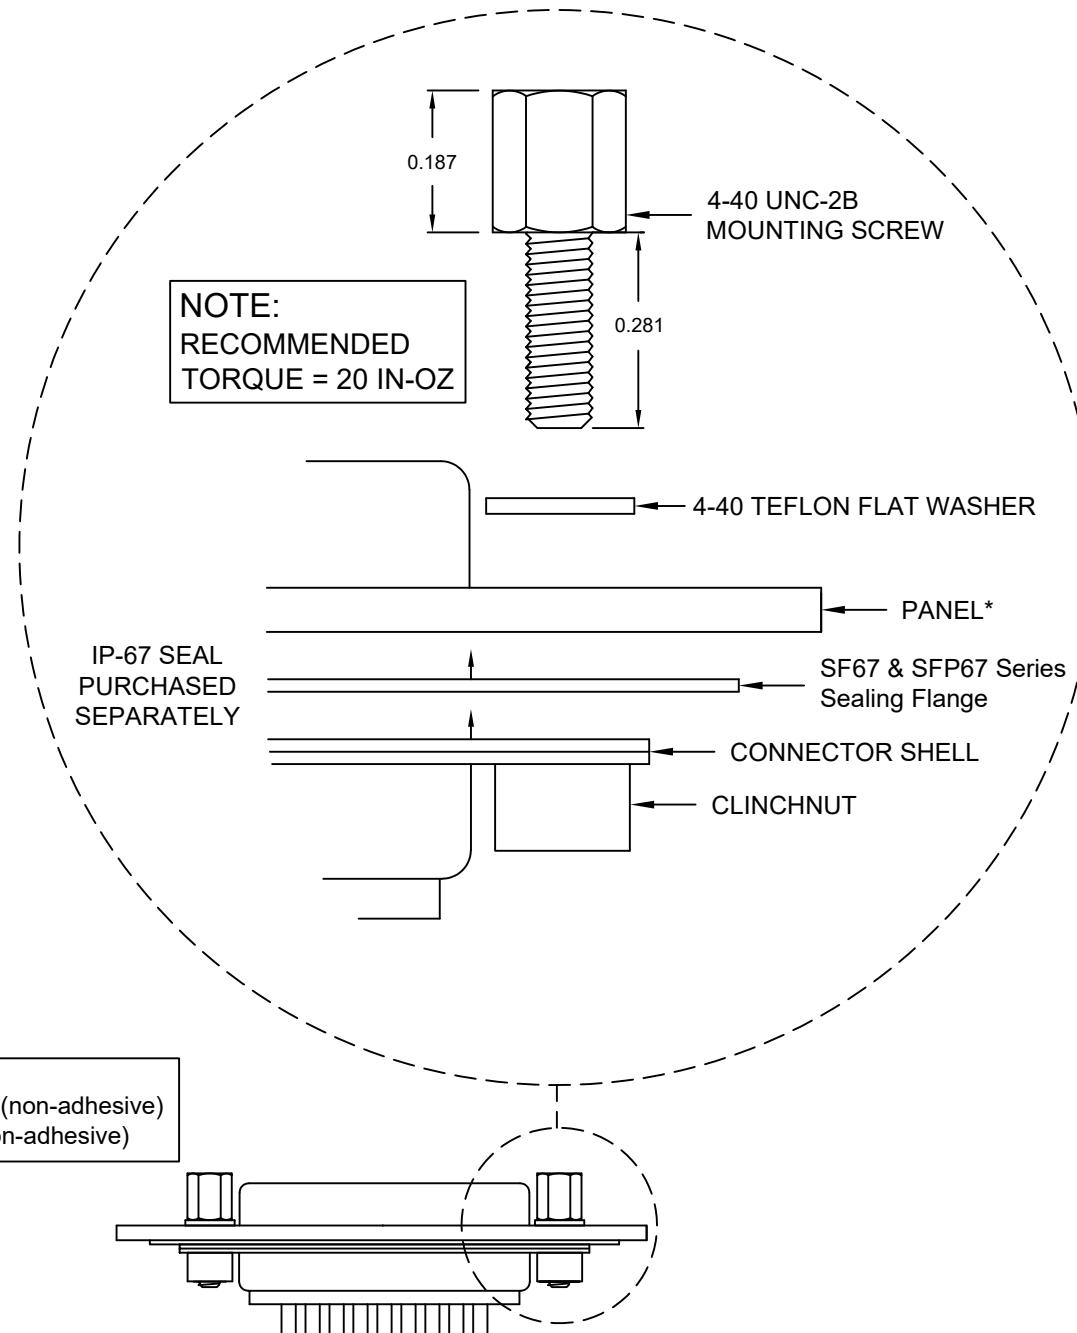

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
01/15/2010

UNITS = inch

DO NOT SCALE FROM DRAWING

NorComp

| | | |
|----------------------------|-----------------------|----------|
| SCALE: NTS | SHEET 1 OF 1 | REV 5 |
| DWG NO. 160-067-004R034 | | |