


Order Number
2260450100



Application Tooling Specification



FEATURES

- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry-standard mounting and 135.80mm (5.346") shut height.
- Quick setup time plus the crimp height, track, and feed adjustments can be set without removing the applicator from the press
- This tool is IPC/WHMA-A-620 compliant.
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of 0.015mm (.0006") for conductor crimp height and 0.063mm (.0025") for insulation height.
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other.
- Directly adapts to most automatic wire processing machines.
- For Crimping terminal 217348-8300 Versa-Blade Female Terminal use applicator 226045-1100.
- For Crimping UL1007 wire (20+20/22+22) with 217347-8300 Versa-Blade Male Terminal use Applicator 226045-0200.
- For Crimping UL1007 wire (20+20/22+22) with 217348-8300 Versa-Blade Female Terminal use Applicator 226045-1200




SCOPE

Products: Versa-Blade Male Double Crimp Terminals, 20+20 & 22+22 AWG UL1015 wire.


Terminal Series No.	Terminal Order No.	Wire Size		Insulation Diameter (Per wire)				Strip Length	
				IPC/WHMA-A-620 (2)		Terminal (3)			
		AWG	Wire Type(1)	mm	In.	mm	In.	mm	In.
217347	217347-8300	20+20	UL1015	2.30-2.60	.090-.102	1.70-2.70	.066-.106	4.0-4.8	.16 -.19
		22+22	UL1015	2.30-2.60	.090-.102	1.50-2.50	.059-.098		
(1) Wire type shown was used to validate the crimp tooling. It is the responsibility of the end user to choose the Wire type that is appropriate for their needs. Other wire types may not meet the same range for IPC/WHMA-A-620. (2) To achieve IPC/WHMA-A-620 insulation crimps, use this Insulation Diameter range. (3) Insulation Diameter per Crimp Specification 2173470000CS.									

*Wire Presentation Notes

- Wires should be presented horizontally. See the illustration to the right.
- Avoid placing the wires vertically or at 45° orientation or any other orientation.

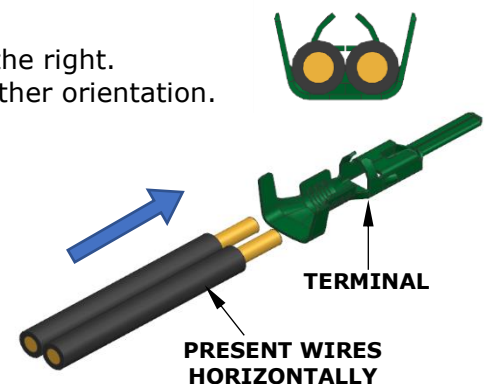

DEFINITION OF TERMS

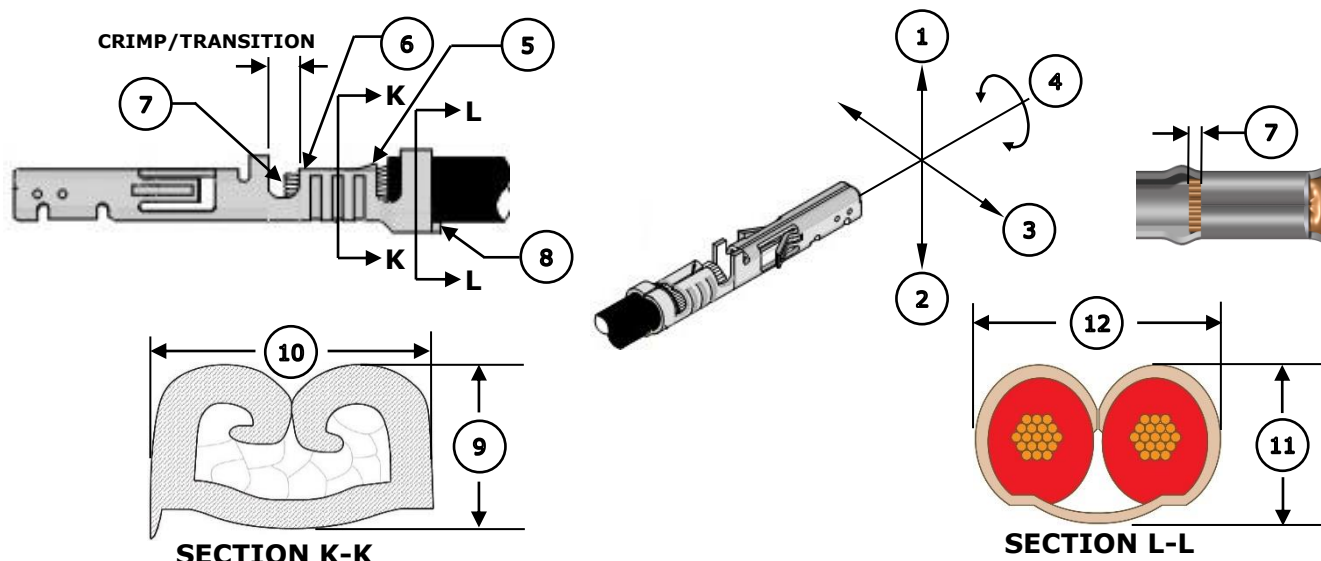

Note: Image above is a generic terminal representation. The actual terminals of the scope may look different.

CRIMP SPECIFICATION

Feature	Requirement					
1. Bend Up	3° Max					
2. Bend Down	3° Max					
3. Twist	3° Max					
4. Roll	5° Max					
5. Bell Mouth Rear	0.30-0.80mm (.012-.031")					
6. Bell Mouth Front	Not Applicable					
7. Conductor Brush	0.30-1.20mm (.012-.047")					
8. Cut-Off Tab	0.50mm (.020") Max					
Conductor Crimp	Terminal Order No.	Wire Size	9. Crimp Height		10. Crimp Width (Ref)	
	217347-8300	20+20 AWG	0.95-1.05	.037-.041 In.	2.50 mm	.098 In.
		22+22 AWG	0.87-0.95	.034-.037 In.	2.50 mm	.098 In.
Insulation Crimp	Terminal Order No.	Wire Size	11. Crimp Height (Ref)		12. Crimp Width (Ref)	
	217347-8300	20+20 AWG	3.00mm	.118 In.	5.40 mm	.212 In.
		22+22 AWG	2.70mm	.106 In.	5.30 mm	.208 In.
Pull Force	Terminal Order No.	Wire Size	Minimum Pull Force		To be measured with no influence from the insulation crimp.	
	217347-8300	20+20 AWG	58.8 N	13.2 lb.		
		22+22 AWG	39.2 N	8.81 lb.		

Tool Qualification Notes

1. Pull force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.

NOTE: Do not attempt to crimp a single wire in this applicator. Tooling damage will result if the insulation crimp height is adjusted too low.

PARTS LIST

FineAdjust Applicator 226045-0100				
Item	Order No.	Engineering No.	Description	Quantity
Perishable Tooling				
	226045-0170	226045-0170	Tool Kit (All "Y" Items)	REF
1	63444-2513	63444-2513	Conductor Punch	1 Y
2	200217-2502	200217-2502	Conductor Anvil	1 Y
3	200220-5203	200220-5203	Insulation Punch	1 Y
4	200221-5203	200221-5203	Insulation Anvil	1 Y
5	63443-0005	63443-0005	Cut-Off Plunger	1 Y
6	63443-0012	63443-0012	Front Plunger Retainer	1 Y
Other Components				
7	11-17-0022	1739-21	Compression Spring	1
8	11-18-4083	60707-8	Feed Guide	1
9	11-24-1067	4996-4	Cut-Off Plunger Spring	1
10	63443-0009	63443-0009	Front Scrap Chute	1
11	63443-0024	63443-0024	Key	1
12	63443-0090	63443-0090	Wire Stop	1
13	63443-0093	63443-0093	Shank	1
14	200213-7602	200213-7602	Anvil Mount	1
15	63443-2801	63443-2801	Front Plunger Striker	1
16	63443-2913	63443-2913	Wire Hold Down Plunger	1
17	63443-7115	63443-7115	Terminal Hold Down	1
18	63443-6119	63443-6119	Rear Cover	1
19	63600-1057	63600-1057	Compression Spring	1
Frame				
20	63800-4901	63800-4901	Top	1
21	63801-3281	63801-3281	Base	1
22	63801-4650	63801-4650	Track	1
Hardware				
23	—	—	M3 by 6 Long SHCS	2*
24	—	—	M3 by 6 Long FHCS	1*
25	—	—	M3 by 8 Long SHCS	1*
26	—	—	M4 by 6 Long SHCS	2*
27	—	—	M4 by 12 Long BHCS	2*
28	—	—	M4 by 50 Long SHCS	2*
29	—	—	M5 by 12 Long SHCS	1*
30	—	—	M5 by 10 Long Flat Point SSS	1*
31	—	—	M5 Hex Jam Nut	1*
* Available from an industrial supply company.				

ASSEMBLY DRAWING

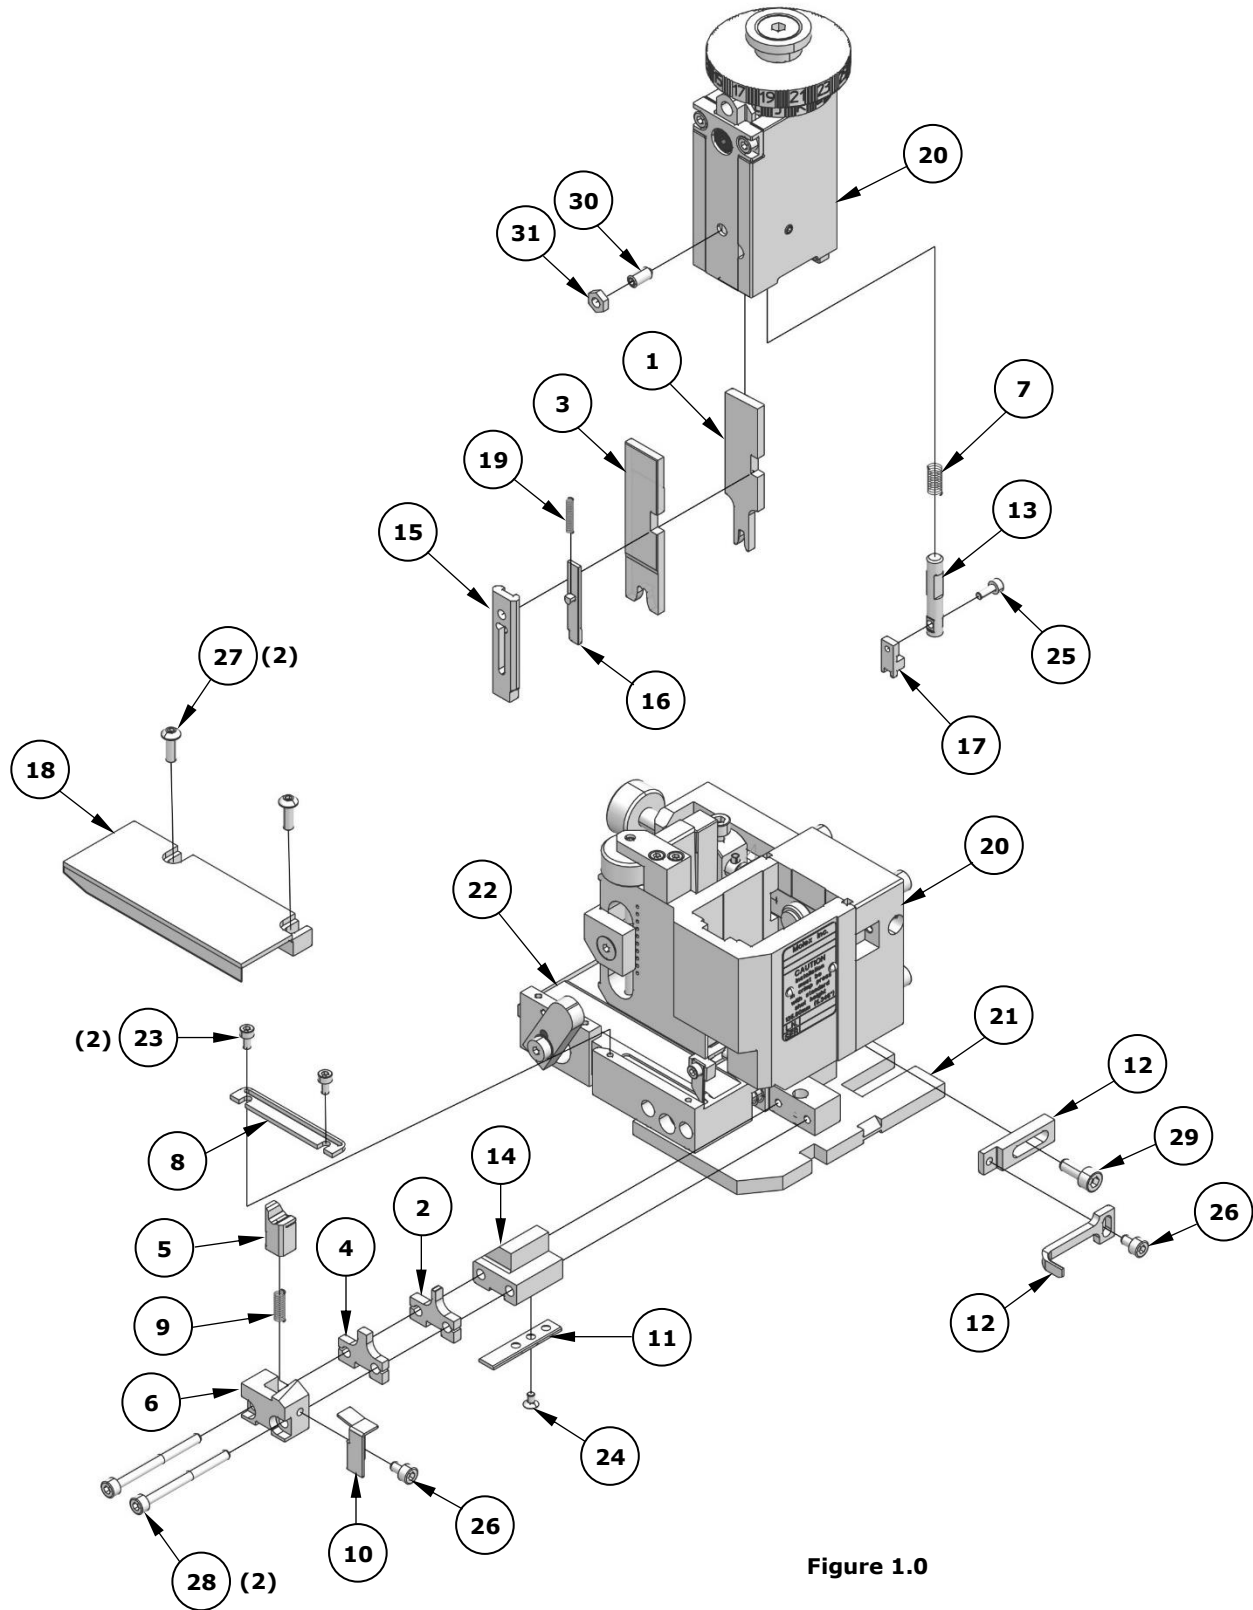


Figure 1.0

NOTES

1. Molex recommends that an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and applicator before crimping under power. Check that all screws are tight.
3. Slugs, terminals, dirt, and oil should be kept clear of the work area.
4. Wear safety glasses at all times.
5. For recommended maintenance, refer to the FineAdjust manual.

CAUTION: This applicator should only be used in a press with a shut height of 135.8mm (5.346"). Tooling damage could result at a lower setting.

CAUTION: To prevent injury, never operate this applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

CAUTION: Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

Application Tooling Support

E-Mail: toolingsupport@molex.com

Website: www.molex.com/applicationtooling

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.