



RUBBER PART	
GENERAL TOLERANCE	
PART DIM.	
0 TO 3	±0.3
3 TO 6	±0.4
6 TO 10	±0.5
10 TO 18	±0.6
18 TO 30	±0.8
30 TO 50	±1.0
50 TO 80	±1.2
80 TO 120	±1.4
120 TO 180	±1.6
180 TO 250	±2.0
250 TO 315	±2.5
315 TO 400	±3.0
400 TO 500	±3.5
500 OVER	±0.8%


B

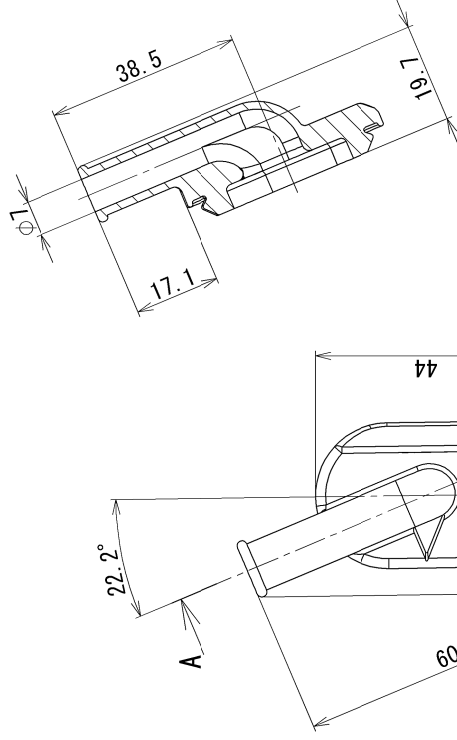

SECT AA



ISOMETRIC VIEW

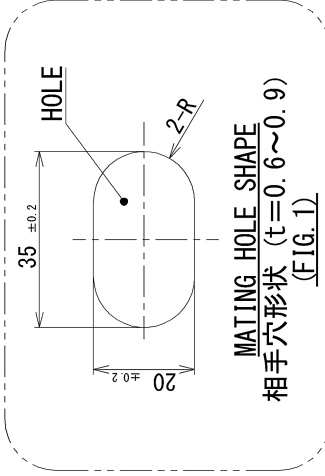


A

注記

- 基本肉厚: $t=1.5\text{mm}$
- 適用パネル: 20×35 , $t=0.6 \sim 0.9$ (FIG. 1)

NOTES

- GENERAL THICKNESS: $t=1.5$
- APPLICABLE PANEL: 20×35 , $t=0.6 \sim 0.9$ (FIG. 1)



ISSUE MARK

CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.		MATERIAL SPEC.		TREAT. & FIN.	
16.06.28		NEW		C16-2047		T.S		EPDM (BLACK)	
LET		DATE		REVISION RECORD		CONTROL NO.		CHKD	
16.06.28		NEW		C16-2047		T.S		CHKD	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
SPECIFIED		SEE RUBBER PART		MASS		10 g		10 g	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	
GENERAL TOLERANCE		10MAX		50MAX		100MAX		250MAX	
A		±0.15		±0.2		±0.3		±0.5	
B		±0.2		±0.3		±0.55		±1.4	
C		±0.3		±0.5		±0.8		±1.4	