




PART NO. $\triangle$ 2	$\triangle$ 1 A	$\triangle$ 1 B	$\triangle$ 1 W ₁	$\triangle$ 1 W ₂	$\triangle$ 3 H ₁	$\triangle$ 3 H ₂	$\triangle$ 4
$\triangle$ 4 7126-8853-02(7B26-8853-02), [B]	3.00	5.40	3.90	2.40	(3.45)	(2.85)	
$\triangle$ 1 7126-8854-02, [B]	4.00	6.40	5.30	3.10	(4.70)	(3.60)	
$\triangle$ 1 7126-8855-02, [B]	4.00	6.40	6.40	4.10	(5.70)	(4.90)	

$\triangle$ 4 NOTES

- HANDLING MANUAL NO. : YPES-15-535
- PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL MONITORING.

$\triangle$ 4 注記

- 取扱説明書No. : YPES-15-535
- () 内品番は、エアバッグ (A/B) 回路及び特別管理回路に使用する時に適用すること。

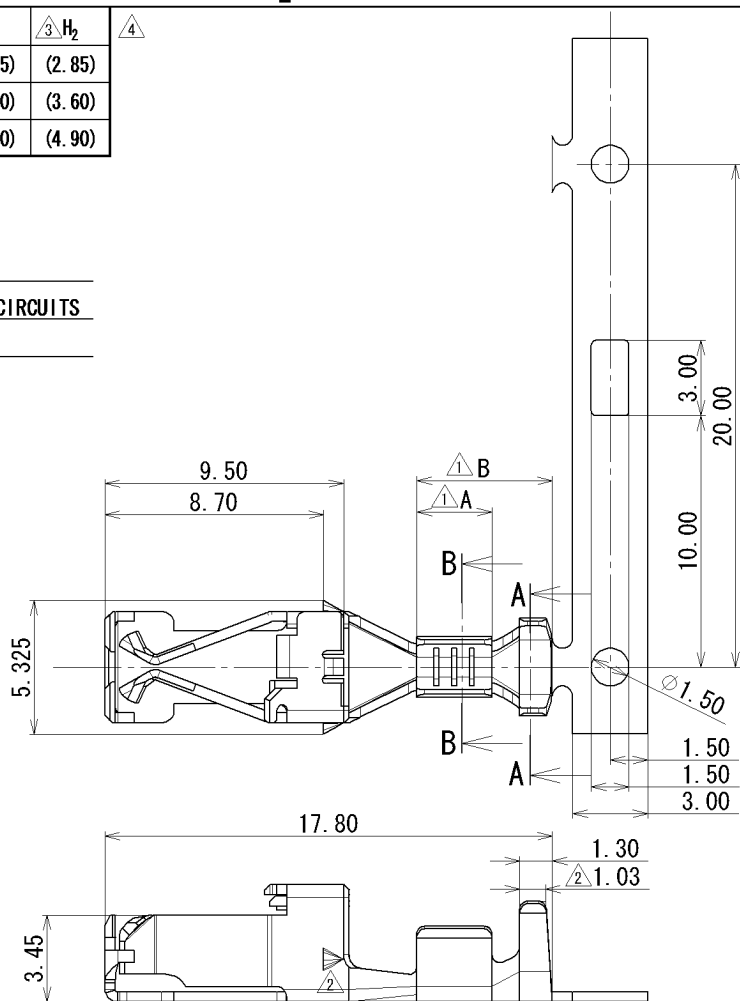

											ISSUE MARK										
④	13/11/07		ADDED A/B PART NO. , ETC.		C13-Z488		R. M		CUSTOMER			MATL. SPEC.		COPPER ALLOY (t=0.4)		TREAT. & FIN.		TIN PLATING			
③	07/10/29		CLERICAL ERROR CORRECTION		C07-XB32		T. H														
②	07/04/18		CHANGED FORM. ETC. , ①B		C07-Z320		T. M		CUSTOMER PART NO.			CUSTOMER DWG NO.			NAME						
①	04/03/08		ADDED PART NO. , ETC.		C04-Z161		J. G														
	03/04/07		NEW, ①A		C03-X270		Y. S		OFFICE			TRIAL PART NO.									
LET	DATE		REVISION RECORD		NO.		CHKD														
GENERAL TOLERANCE								VENDOR NO.					PART NO. CH. CODE								
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE		DWG SOURCE		DWG DATE							UNIT	SCL	ANGLE
A	±0. 15	±0. 2	±0. 3	±0. 5	±0. 75	±30°	O. 1	R		NEW		03/04/07					mm	5:1	3		
B	±0. 2	±0. 3	±0. 55	±0. 95	±1. 4	±30°	O. 1	APPROVED		CHECKED		CHECKED					DESIGN		DRAWN		
③	±0. 3	±0. 5	±0. 8	±1. 4	±2	±30°	O. 15	M. FUKUDA		N. SAKAMOTO							Y. SHIGETA		R. MORTELA		
SPECIFIED							MASS		13/11/07		13/11/07								01/03/26		13/11/07
</																					