GENERAL TOLERANCE											
	10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±2.5	±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4					±3°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2					±3°	0.15

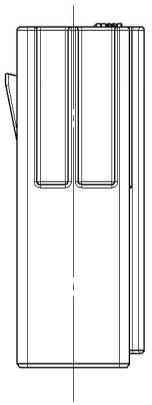



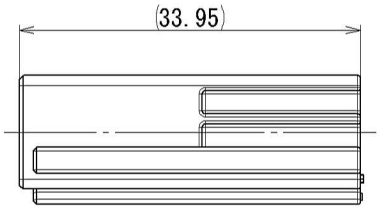

注記

1. 適用端子品番 : 7114-7386-02 ETC.
2. 適用フレーム品番 : 7171-6073-30

NOTES

1. APPLICABLE TERMINAL PART NO. : 7114-7386-02 ETC.
2. APPLICABLE FRAME PART NO. : 7171-6073-30

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
	2014/01/06	NEW	C14-Z001	E.D

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15

SPECIFIED

MASS

CUSTOMER					
CUSTOMER PART NO.		CUSTOMER DWG NO.			
OFFICE		TRIAL PART NO.			
VENDOR					
VENDOR NO.					
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	2014/01/06	mm	2:1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
K.SUZUKI	Y.IWAHORI	M.SUZUKI	Y.IWAHORI	E.DOMINGO	
2014/01/06	2014/01/06	2014/01/06	2013/12/23	2014/01/06	

MATL. SPEC.	PBT (LIGHT GRAY)
TREAT. & FIN.	
NAME	060 4P TYPE-A SUB HOUSING MALE
PART NO. CH. CODE	7188-3377-40
DWG NO.	7188-3377-40:R
SET DWG NO.	
	YAZAKI CORPORATION