

MU18S 30-32N

iC-MU MAGNETIC TARGET DESCRIPTION

preliminary




Rev B1, Page 1/3

ORDERING INFORMATION

Type	Order Destination	Description/Options
Magnetic target (rotary, axial)	MU18S 30-32N	2-Track nonius encoder disc Bipolar magnetized Number of pole pairs: master 32, nonius 31 Outer diameter 30 mm, for 11.0 mm shafts Injection molded permanent magnet material

CODE DISC DIMENSIONS

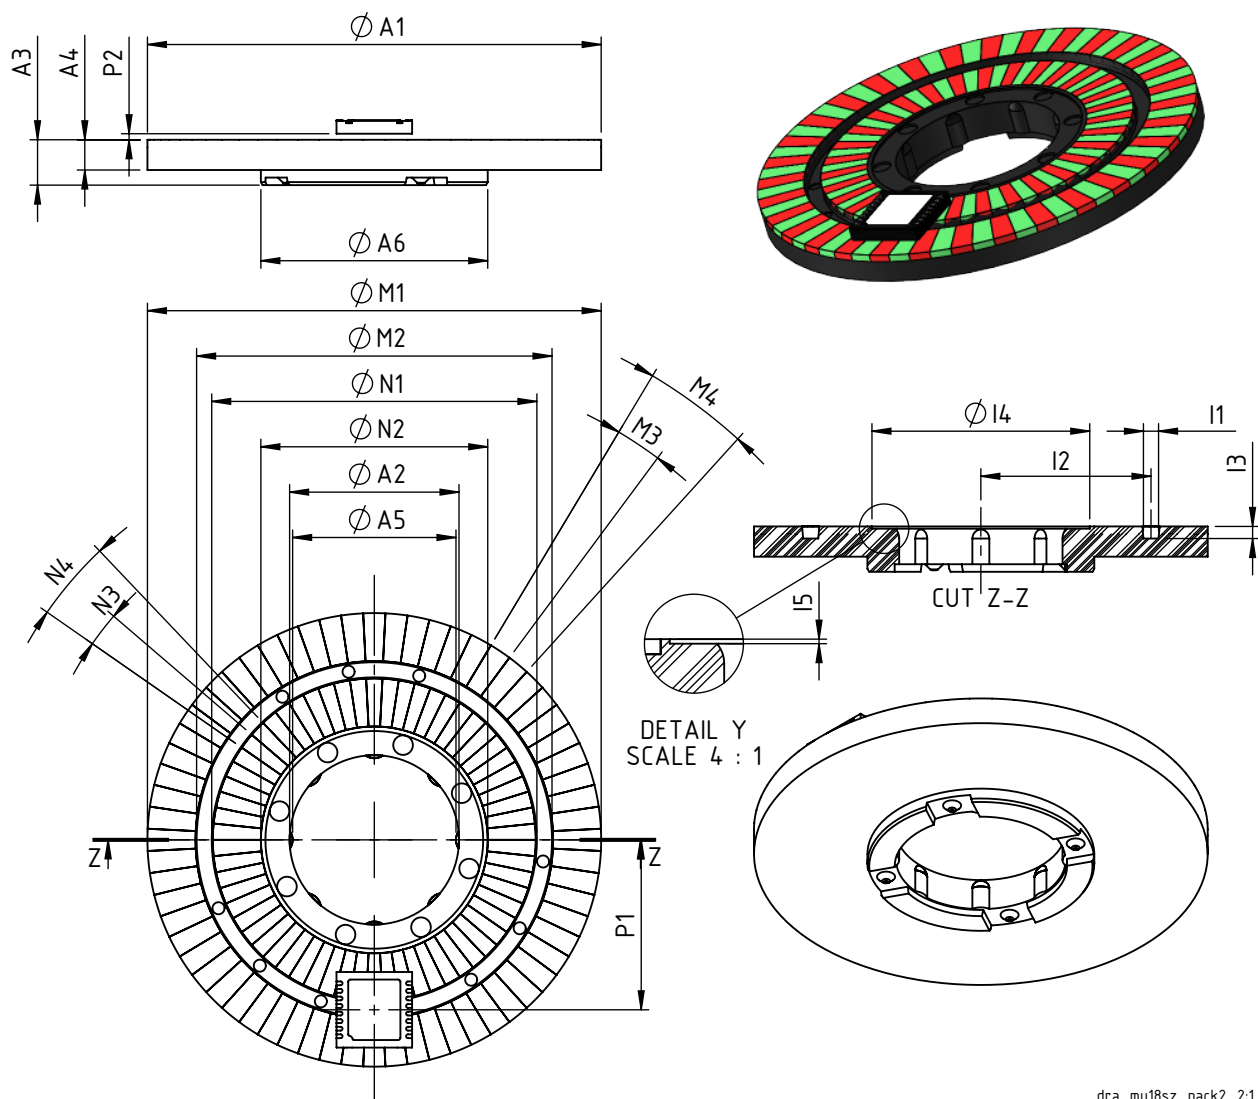

dra_mu18sz_pack2, 2:1

Notice: Interference in function

External magnetic fields can change the functional properties and may reduce system accuracy or damage the disc magnetization. The functionality of the system may no longer be ensured. Direct contact with magnetic clamps or other permanent magnets must be avoided.

MU18S 30-32N

iC-MU MAGNETIC TARGET DESCRIPTION

preliminary



Rev B1, Page 2/3

ABSOLUTE MAXIMUM RATINGS

Beyond these values damage may occur; device operation is not guaranteed.

Item No.	Symbol	Parameter	Conditions	Min.	Max.	Unit
G001	Bext	Max. External Magnetic Field Strength	at disc surface		20	mT

THERMAL DATA

Operation conditions: No changes of the magnetic characteristics

Item No.	Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
T01	Ta	Operating Ambient Temperature Range		-40		125	°C

DIMENSION TABLE

Carrier material is a combination of polyamide and hard ferrite.

Item No.	Parameter	Comments	Min.	Typ.	Max.	Tolerance	Unit
Physical Dimensions Disc							
A1	Disc Outer Diameter			30.0		+ 0.0 / - 0.2	mm
A2	Diameter of Bore Hole	for pressing and guling on 11.0 mm shafts		11.2		±0.09	mm
A3	Total Height			3.0		±0.08	mm
A4	Disc Thickness			2.0		±0.05	mm
A5	Diameter of press ridge	centers magnetic target during press in		10.8		±0.08	mm
A6	Diameter of Outer Shaft			15.0		±0.1	mm
Physical Dimensions Code Free Area							
I1	Width of Code Free Area	between master and nonius track		1.0			mm
I2	Radius Code Free Area			11.25			mm
I3	Depth of Code Free Area			0.8			mm
I4	Diameter of Cavity			14.4			mm
I5	Depth of Cavity			0.15		+ 0.05 / - 0.1	mm
Magnetic Dimensions Outer Track (Master)							
M1	Outer Diameter of Master Track	referred to axial center		30.0			mm
M2	Inner Diameter of Master Track			23.5			mm
M3	Pole Angle of Master Track	$\frac{360}{64}$		5.625			°
M4	Pole Pair Angle of Master Track	$\frac{360}{32}$		11.25			°
Magnetic Dimensions Inner Track (Nonius)							
N1	Outer Diameter of Nonius Track	referred to axial center		21.5			mm
N2	Outer Diameter of Nonius Track			15.0			mm
N3	Pole Angle of Nonius Track	$\frac{360}{62}$		5.806			°
N4	Pole Pair Angle of Nonius Track	$\frac{360}{31}$		11.613			°
Chip Position							
P1	Radial Position of Chip Center	referred to axial center		11.24			mm
P2	Distance Package Surface DFN16-5x5	referred to magnetic coating surface		0.4			mm
P3	Distance Sensor Surface (Bare Die)	referred to magnetic coating surface		0.8			mm
Magnetic Material Characteristics							
Br	Remanence	at 20 °C		235			mT
TKB	Temperature Coefficient of Remanence	temperature range -40 °C to 125 °C		-0.19			%/K

MU18S 30-32N

iC-MU MAGNETIC TARGET DESCRIPTION

preliminary



Rev B1, Page 3/3

REVISION HISTORY

Rel.	Rel. Date*	Chapter	Modification	Page
A1	2015-04-27		Initial Release	

Rel.	Rel. Date*	Chapter	Modification	Page
B1	2016-06-21		Release valid for MU18S 30-32N revision Z	
		CODE DISC DIMENSIONS	Drawing updated, dimensioning I4 and I5 added	1
		DIMENSION TABLE	Item I4 & I5 added: introduced cavity Tolerance of item A1 updated: from ± 0.11 mm to $+ 0.0 / - 0.2$ mm Tolerance of item A5 added Tolerance of item A6 updated: from ± 0.09 mm to ± 0.10 mm	2

iC-Haus expressly reserves the right to change its products and/or specifications. An info letter gives details as to any amendments and additions made to the relevant current specifications on our internet website www.ichaus.com/infoletter; this letter is generated automatically and shall be sent to registered users by email.

Copying – even as an excerpt – is only permitted with iC-Haus' approval in writing and precise reference to source.

iC-Haus does not warrant the accuracy, completeness or timeliness of the specification and does not assume liability for any errors or omissions in these materials.

The data specified is intended solely for the purpose of product description. No representations or warranties, either express or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given. In particular, this also applies to the stated possible applications or areas of applications of the product.

iC-Haus products are not designed for and must not be used in connection with any applications where the failure of such products would reasonably be expected to result in significant personal injury or death (*Safety-Critical Applications*) without iC-Haus' specific written consent. Safety-Critical Applications include, without limitation, life support devices and systems. iC-Haus products are not designed nor intended for use in military or aerospace applications or environments or in automotive applications unless specifically designated for such use by iC-Haus.

iC-Haus conveys no patent, copyright, mask work right or other trade mark right to this product. iC-Haus assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

* Release Date format: YYYY-MM-DD